

Spence

Designer's Guide

Edition I



Steam and fluid control

Regulators | Pilots and Combinations | Control Valves | Direct Operated Valves |
Noise Suppression Insulation and Desuperheaters | Piping Specialties

SPENCE ENGINEERING COMPANY, INC

The Spence Engineering Company was founded in 1926 by Paulsen Spence in Walden, New York. Paulsen Spence developed the original patent for the normally closed external Pilot operated packless pressure regulator. This design is the basis for the products offered today. This technology offers the maximum in application and selection flexibility. Spence can produce regulators up to 12 inches in cast iron and cast steel. Their pilots are used to control pressure, temperature, differential pressure or back pressure either mechanically or with a pneumatic pilot.

Spence Engineering is a widely recognized leader in the steam regulator and flow control. Spence regulators are used extensively for heating systems in buildings, institutions and district heating systems as well as major industrial plants.

In 1984, Spence Engineering was acquired by Watts Industries. The company continued to grow and develop new fluid control and steam specialty products. A new line of pneumatic Control valves was introduced in 1986. In 1989, a range of self contained temperature regulators was added to the line to meet the demand for an economical temperature regulator.

1990 was an active year, with Spence becoming certified by the ASME for the assembly and setting of safety relief valves manufactured by their sister Watts company in Canada. Spence was also instrumental in the acquisition and management of the Nicholson Steam Trap Company. In 1994, Nicholson was integrated into the Spence Plant.

Spence continued its product development program with the introduction of free float steam traps and pressure operated condensate pumps. In 1996, Watts moved the manufacturing responsibility for safety valves to the Spence Engineering plant in Walden, New York. Spence is now an ASME certified manufacturer of bronze and iron safety relief valves.

In 2019, Spence and Nicholson were acquired by Emerson from CIRCOR International.

Emerson and Spence continue to focus their attention on providing single source steam specialty products for regulating and control of steam and fluids for the institutional marketplace.

For more information on Spence products, visit our website at [SpenceEngineering.com](https://www.SpenceEngineering.com)

TABLE OF CONTENTS

READY TO START?

The best way to make a selection is to contact your local Spence Engineering Technical Sales Representative. Spence Engineering has a network of technically trained Representatives that can direct you to local inventory of our products for fast service. They can also help you in the selection and sizing of Regulators, Pilots, Desuperheaters and Noise Suppression Products. For the name and number of your local Spence Representative visit our website at www.spenceengineering.com

SECTION I

REGULATORS

ED Series Pressure Regulator Features	14
How to Choose a Regulator	15
The Operation Cycle of a Spence Pressure Regulator	16
The Operating Cycle of a Spence Temperature Regulator	17
Quick Selection Chart for Steam Pressure Regulators	18
Quick Selection Chart for Temperature Regulators	19
Spence Main Valve Specification Table	20

COMBINATION REGULATORS

Type ED Series Pressure Regulator	22
Type E2D Series Pressure Regulator	23
Type ED & ED2 Integral Mound Pressure Regulator	24
Type EA Series Pressure Regulator	25
Type EA14 Temperature Regulator	26
Type ET14D Pressure Limiting Temperature Regulator	27
Type ET124/ET134 & E2T134 Temperature & Pressure Regulator	28
Type ED210 Regulator	29
Type ED208D Pressure Regulator	30
Type E Main Valve	32
Type E2 Main Valve	34
Type E5 Main Valve	36

Type E6 Main Valve	38
Type E8 Main Valve	40
Type C34 Main Valve	42
MAIN VALVE ACCESSORIES	
Main Valve Options	46
Insulcap Jacket	48
Type A&B Panels	49
Auxiliary Fittings	50
PILOTS	
Type D Pressure Reducing Pilot	52
Type A Air Adjusted Pilot	54
Type N Differential Pressure Pilot	56
Type P Pump Governor Pilot	58
Type F46 Vacuum Pump Governor Pilot	60
Type Q Back Pressure Pilot	62
Type F Back Pressure Pilot	64
Type P 125 Trip Stop Pilot	66
Type SP/P Pressure Safety Pilot	68
Type M Solenoid Pilot	70
Type D208 Electronic Actuator Pilot	72
Type D210 Electronic Actuator Pilot	74
Type VH210	76
Type T124/134 Temperature/Pressure Pilot	78
Type T14 Vapor Tension Temperature Pilot	80
Type T52 Temperature Pilot	82
Type SP/T Temperature Safety Pilot	84
Type T61, T62, T63, T64, Pneumatic Temperature Controller	85
Material Specifications for Main Valves & Pilots	86
PILOT ACCESSORIES	
Thermostat Bulbs & Wells	88
Pilot Options	89

DIRECT OPERATED VALVES

Series 2000 Temperature Regulator Features	92
Series 2000 Temperature Regulator	94
Capacity Table	97
Sizing Series 2000 Temperature Regulator	98
Steam Flow Requirements	98
Type D50 Pressure Reducing Valve	99
Type N6 Differential Pressure Valve	101
Type D & D2 Differential Pressure Valve	103
Type D34 Water Pressure Reducing Valve	105
Type D36 Water Pressure Reducing Valve	107

REGULATOR SIZING

Definitions Relating to Regulator Capacity	112
Planning Main Valve Installation	113
Rules for Main Valve Selection	114
Valve Sizing By Computation	115
Pressure Reducing Station Design Guidelines	116
Pressure Reducing Station General Specification	116
Regulator Cv Data	117
Saturated Steam Flow Table (lb/hr)	118
Selecting Pressure Pilots	120
Sizing Pressure Regulators	121
Selecting Temperature pilots	122
Sizing Temperature Regulators	123
Selecting Differential Pressure Pilots	124
Sizing Differential Pressure Regulators	125
Selecting Back Pressure Pilots	126
Sizing Back Pressure Regulators	127
Selecting Pump Governor Pilots	128
Rated Steam Capacity Table	129
Sizing D36 Water Pressure Reducing Valve	136
Sizing D50 Direct Acting Pressure Regulator	138

SECTION II

Type J Control Valve Features	140
Series K Control Valve	142
Capacity Tables	146
Type J Control Valve	150
Shutoff & Cv Tables	153
Capacity Tables	157

CONTROL VALVE OPTIONS & ACCESSORIES

Packing Configurations	162
Actuators	163
Electro – Pneumatic (I/P) Transducer	163
RTD Resistance Probe Thermometer	164
Electronic Pressure Transmitter	164
Eckardt Positioner	165
PMV Positioner	166
Moore Positioner	167

CONTROL VALVE SIZING

Valve Sizing By Computation	170
Piping Geometry Factors	171

SECTION III

DESUPERHEATERS

Desuperheaters	176
Rules for Sizing Desuperheaters	178

NOISE REDUCTION

Noise Suppressor	180
Muffling Orifice Plates (MOPS)	182
Noise Reduction Design Guidelines	184

SECTION IV

APPLICATION GUIDE

Type ED Single Stage Pressure Reducing Valve	194
Type ED Parallel (Additive) Pressure Reducing Station	195
Type ED Two - stage Pressure Reducing Station	196
Type ED Turbine Exhaust make-up Valve	197
Type EF14 AND EF14D Steam Allocating Valves	198
Type ED Remote Shut off	199
Type ED Remote Mounted Pilot	200
Type EP 125 Trip Valve	201
Type D50 Direct Operated Pressure Reducing Valve	202
Type ED5 Pressure Regulator for Accurate Control of a Deaerator	203
Type EP Pressure Regulator for Self – contained Control of an Unfired Steam Generator	204
Type EP Pressure Regulator Integrally Mounted for Self – contained control of an Unfired Steam Generator	205
Type E8 Air Adjusted Pressure Reducing Valve	206
EA Series Air Adjusted Pressure Regulator	207
EA93 Automatic Transfer Pressure Reducing Station	208
Type E2 Slow Opening Valve	209
Type EA Pressure Regulator with Type B Panel 590 for Gaylord Shower Control	210
Type EA Pressure Regulator with Type B Panel for Control of the Plate Sections of a Corrugator	211
Type EM33D Electrically Operated Reducing Valve	212
Type ED208D Electronic Startup Control in conjunction with a Time Proportioning Outdoor Reset Controller	213
Type ED208P14-EF14D Electronic Slow Start-up Control for Parallel Operation	214
Type ED210 Electronic Modulating Regulator	215
Type ED208D Electronic Start-up Control	216
Type EDM33D Pressure Reducing Valve with Two Set Point Control	217
Type D36 Water Pressure Reducing Valve	218
Type C34D Pilot Operated Pressure Reducing Valve	219
Type ET14 & ET14D Temperature Regulator	220

Type ET 124 & ET134 Temperature Regulator	221
Type C34T52 Cooling Regulator	222
Type FT14D Temperature Regulator	223
Type ET14T 14 Temperature Regulator	224
Type ET134 Temperature Regulator for Poultry Scalding	225
Type C34T52 Temperature Regulator for Chilled Water System	226
Series 2000 Direct Operated Temperature Regulator for Storage Heater	227
Series 2000 Direct Operated Temperature Regulator for Plate Heater	228
Series 2000 Direct Operated Temperature Regulator for Engine Jacket Cooling	229
Series 2000 Direct Operated Temperature Regulator for Liquid Cooling Tank	230
Series 2000 Direct Operated Temperature Regulator for three-way Blending/Mixing	231
Series 2000 Direct Operated Temperature Regulator for Three-way Diverting	232
Type EAT61 Air Controlled Temperature Regulator	233
Type EA Temperature Regulator for Remote Thermostat Control	234
Type ET134 Self-contained Temperature Regulator for Starch Mixer	235
Type EAT60 Temperature Regulator for Wax Application Control	236
Type ET124A Viscosity/Temperature Regulator	237
Type EQ Back Pressure Regulator	238
Type EF14D Pressure Reducing Valve with Back Pressure Control	239
Type EQ Back Pressure Valve with Flow Control Orifice	240
Type C34AQ Back Pressure Pump bypass Control	241
Type EN Differential Regulator	242
Type N6 Differential Pressure Valve	243
Type C34N Differential Pressure Regulator	244
Type C34N20 Differential Regulator	245
Type EP14 Pump Governor	246
Steam Atomizing Air Operated Desuperheater	247
Mechanical Atomizing Air Operated Desuperheater	248
Pressure Regulator with Muffling Orifice	249
Pressure Regulator with Noise Suppressor	250

Type J Control Valve and Liquid Level Controller for Boilers	251
Type J Control Valve with Electro-pneumatic positioner for computerized Congeneration Control	252
Type J Control Valve for Level/Make-up on a Deaerator	253

SECTION V

REFERENCE & PIPING DESIGN

Glossary of Terms	256
Flow vs. Velocity Chart	257
Reference Tables	259
Pressure Temperature Limits	265
Spence Typical Installation for Sanitary Steam System	266
Spence Single Stage Pressure Reducing Station	267
Spence Two Stage Pressure Reducing Station	268
Spence Single Stage Parallel Pressure Reducing Station	269
Spence Two Stage Parallel Pressure Reducing Station	270
Spence Typical Installation for Instantaneous Heater	271
Spence Typical Installation for Storage Heater	272
Steam Tables	274
Product Index	276

It is solely the responsibility of the system designer and the user to select products suitable for their specific application requirements and to ensure proper installation, operation, and maintenance of these products. Assistance shall be afforded with the selection of the materials based on the technical information supplied to Spence Engineering Company, Inc. Applicable codes, material compatibility, Product ratings and application details should be considered in the selection and application. Improper selection, application or use of the products described herein can cause personal injury or property damage. If the product is intended for an application or use other than originally specified, the system designer and or user must reconfirm that the selection is suitable for the new operation conditions.

This image shows a full page of white paper with horizontal dotted lines. The lines are evenly spaced and run across the width of the page, providing a guide for handwriting or typing. There are no margins, text, or other markings on the page.

SECTION I


REGULATORS

IRON HORSE ED SERIES PRESSURE REGULATOR

Pressures to 600 PSIG / Temperatures to 750°F

APPLICATIONS

- Pressure Regulation for Steam Distribution • Single Point or Multiple Use Applications
- Pressure Control for Steam Plants • District Heating Systems • Single Stage Reduction Stations
- Two Stage Reduction Stations • Parallel Reduction Stations

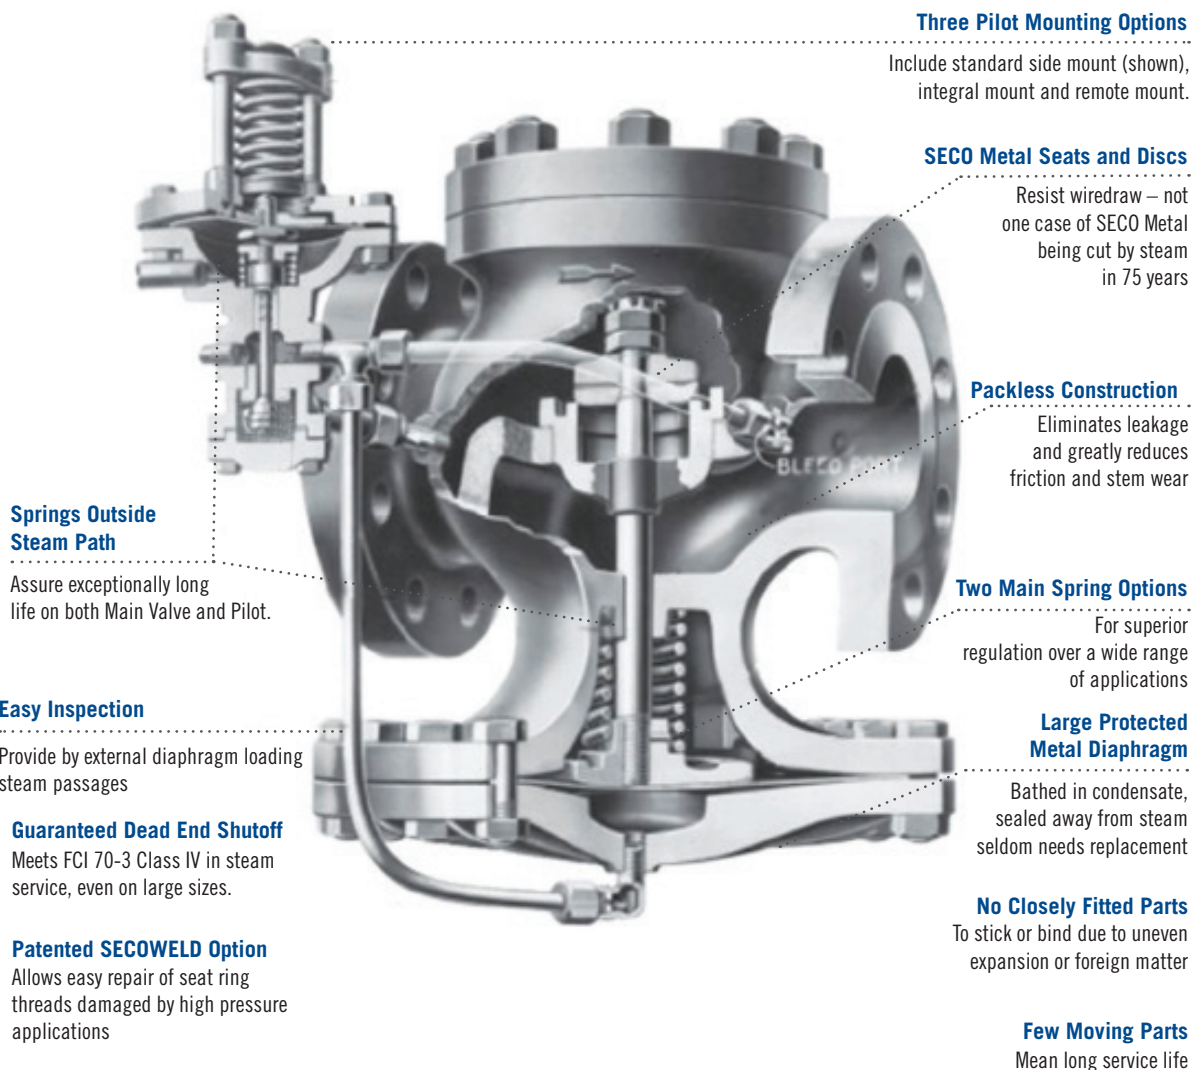

HOW TO CHOOSE A REGULATOR

If you already know the product that you want information on, find the product page in the Table of contents. Pages showing popular combinations of Pilot and Regulators are found in the Combination Regulators Chapter. Detailed product information on materials, ratings, dimensions, weights and applications are found in the Products Chapters. All sizing information is contained in the Regulator Sizing Chapter. If you are not sure of what you need, collect all the following information. You will need it to select the right product for your needs.

Inlet Pressure

Flow Rate

Flow Media (i.e.: Steam, water. Etc.)

Desired Delivery Pressure

Noise Restrictions, if any

Type of Pilot Control (i.e.: Self Contained, Pneumatic, Electronic, etc.)

Application (i.e.: Temperature Regulation, Single stage Pressure Regulation, etc.)

Application data is listed on each Product Page. If you identify the nature of the installation, it will assist you selecting the proper equipment.

DIRECT ACTING OR PILOT OPERATED REGULATOR?

You may be able to use a Direct Operated Regulator for your application. They are generally less expensive than Pilot Operated Regulators. However, they do not provide the same level of accuracy or rangeability. If a Direct Acting Regulator is an option, consult the Direct Operated Valves Chapter to determine which best fits your specific needs. Then, consult the appropriate pages in the Regulator Sizing Chapter to select the exact size you need.



If a Pilot Operated Regulator is required, go to Page 14 (for Pressure Regulators) or Page 15 (for Temperature Regulators). These selection charts will help you to quickly determine the type of product that you need. The Pilot can be self contained, pneumatically or electronically actuated. Consult the appropriate pages in the Regulator Sizing Chapter to select the exact size Regulator and Pilot you need. Overall dimensions of the most popular combinations are provided in the Combination Regulators Chapter.

ECONOMICAL, ENGINEERED OR ENGINEERED WITH NOISE SUPPRESSION?

The choice of how to size a regulator for an application is up to you. The most economical choice does not necessarily take into consideration the optimum loading of the Regulator, which could affect its service life. Properly engineered Spence Regulators have been in continuous service for as much as 50 years. In high pressure reduction stations, noise can be a serious environmental problem. Spence offers a number of Noise Suppression products to reduce this problem. You will find comprehensive noise reduction sizing and selection information in the Noise Reduction Chapter.

THE OPERATING CYCLE OF A SPENCE PRESSURE REGULATOR

The basic Type ED has been selected to illustrate the operation of a SPENCE Pilot Operated Pressure Regulator. This presentation describes the successive steps in the mechanical cycle of the Regulator.

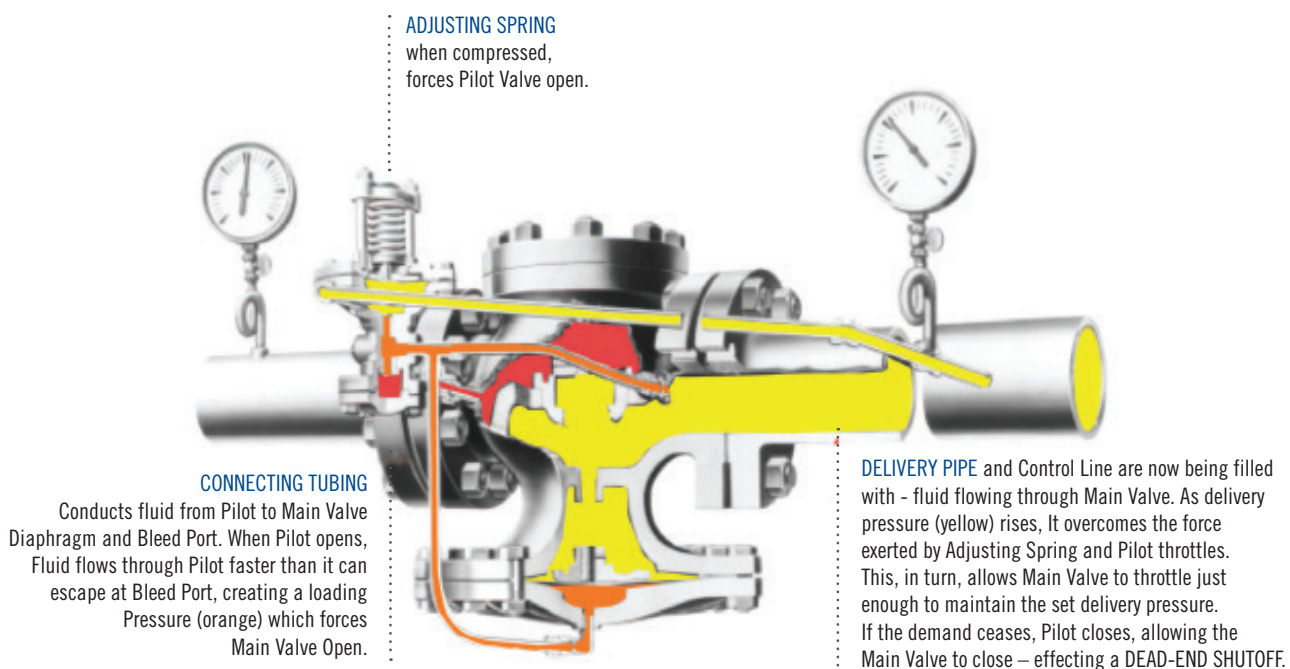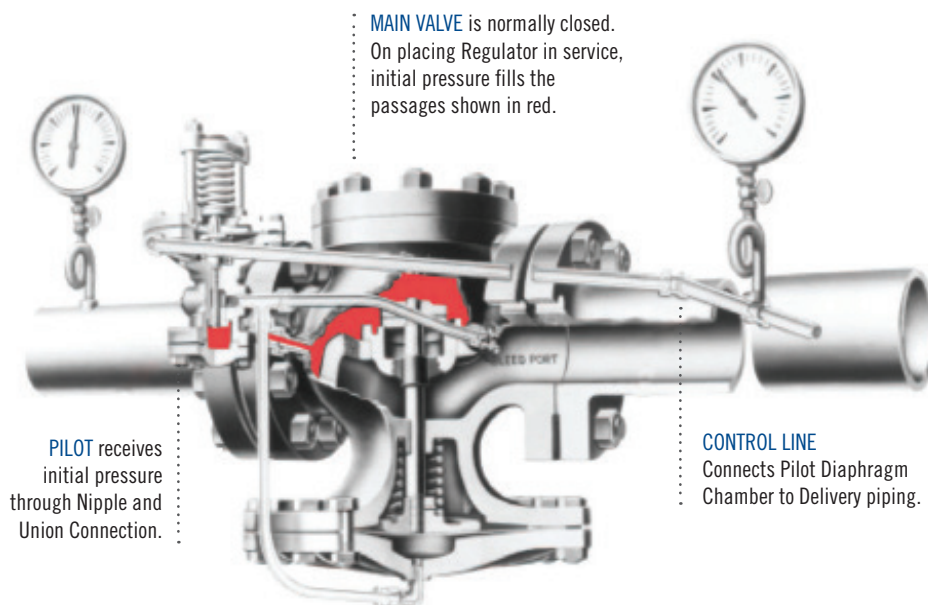


KEY ● HIGH PRESSURE

● MEDIUM PRESSURE


● LOW PRESSURE

THE OPERATING CYCLE OF A SPENCE TEMPERATURE REGULATOR

The Type ET134 has been selected to illustrate the operation of a SPENCE Pilot Operated Temperature Regulator. This presentation describes the successive steps in the mechanical cycle of the Regulator.

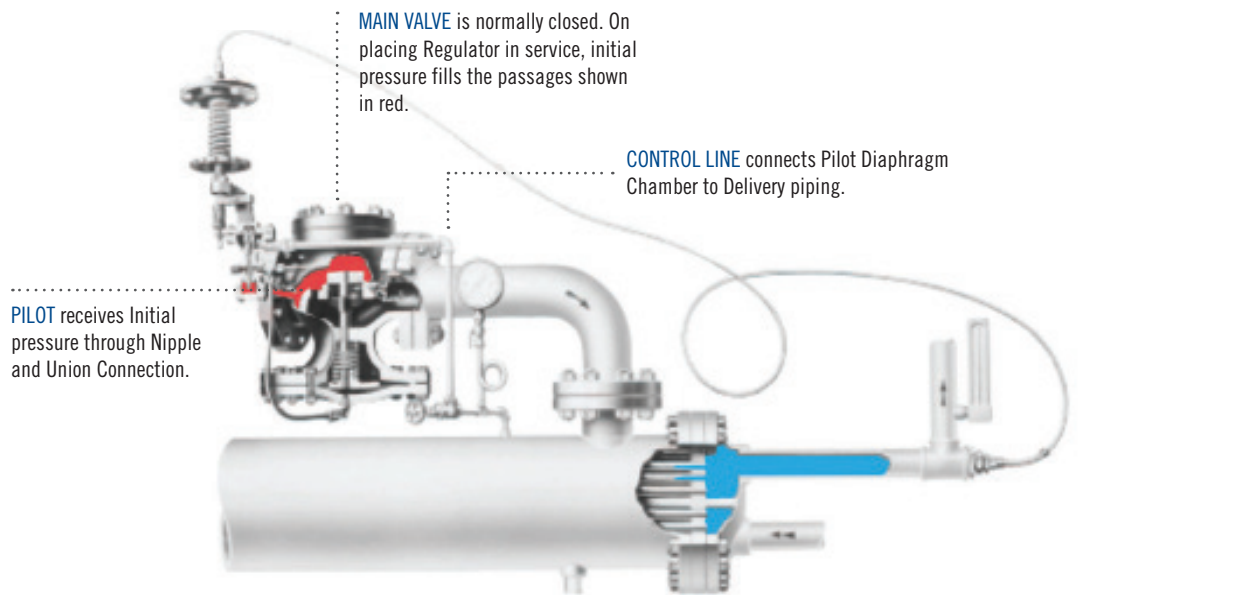

KEY ● INITIAL STEAM PRESSURE ● LOADING STEAM PRESSURE ● DELIVERY STEAM PRESSURE ● VAPOR PRESSURE ● FLUID HEATED

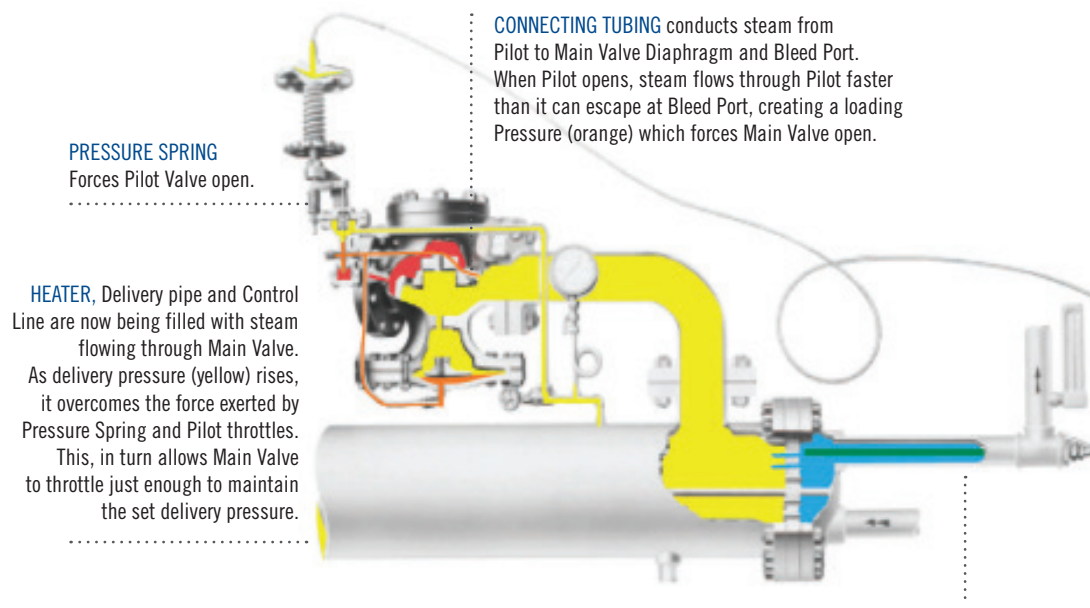

THERMOSTAT ELEMENT (vapor tension type) is connected into heater outlet. The rising temperature of the fluid (blue) being heated creates a Vapor pressure (green) on the Temperature Diaphragm. When this pressure has reached a point sufficient to overcome the Temperature Adjusting Spring, it Applies a force on the Lever so as gradually to decrease the spring loading on The Pressure Diaphragm. This produces a stem-by-step reduction in the Delivery pressure as the temperature rises through several degrees. If the desired temperature is exceeded, the vapor pressure on the Pilot Temperature Diaphragm overcomes the forces of the Spring. This allows Pilot and Main Valve to close tight.

QUICK SELECTION CHART

FOR STEAM PRESSURE REGULATORS


Review the application data that you have collected. Consult the chart, starting with the inlet pressure that matches the inlet pressure you have. Next, select your outlet pressure (reduced or delivery pressure). Then select the type of pilot control that you will be using and, finally, the level of accuracy that your system requires. This will lead you to a recommended regulator. Please bear in mind that these recommendation are general in nature and you should check the Product Pages and Sizing Section to ensure you have selected the correct product. If you need assistance, contact your local Spence Technical Sales Representative.



*Electronic Pilot accuracy is a function of controller accuracy.

QUICK SELECTION CHART FOR TEMPERATURE REGULATORS

Review the application data that you have collected. Consult the chart, starting with the inlet pressure that matches the inlet pressure you have. Next, select your outlet pressure (reduced or delivery pressure). Then select the type of pilot control that you will be using and, finally, the level of accuracy that your system requires. This will lead you to a recommended regulator. Please bear in mind that these recommendations are general in nature and you should check the Product Pages and Sizing Section to ensure you have selected the correct product. If you need assistance, contact your local Spence Technical Sales Representative.

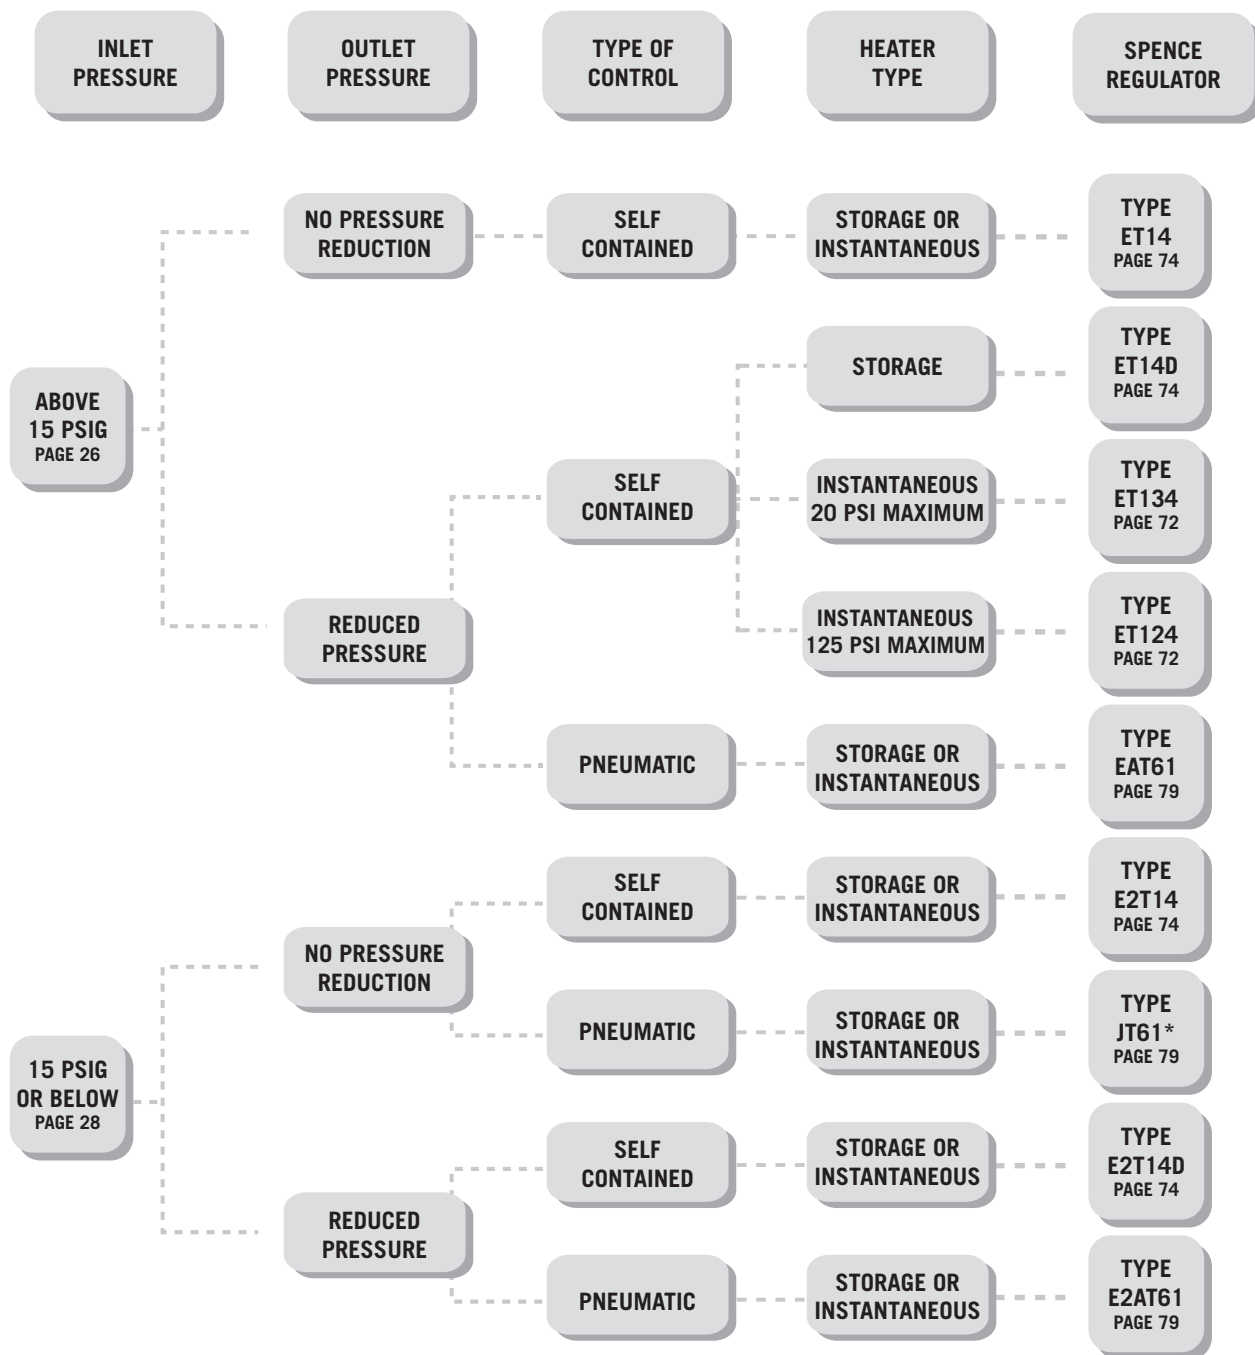

*See Control Valve Section, Page 142

SPENCE MAIN VALVE SPECIFICATION TABLE



TYPES		SIZES, BODY MATERIAL ^a AND FACINGS								OTHER MATERIAL						
		CAST IRON			CAST BRONZE	CAST STEEL				Diaphragm	SEATRINGS		DISCS		Steam	Main Spring
		Screwed Ends	Flanged ANSI 125	Flanged ANSI 250	Screwed Ends	Screwed Ends	Flanged ANSI 150	Flanged ANSI 300	Flanged ANSI 600		Steam Service	Water,oil, Air or Gas Service	Steam Service	Water,oil, Air or Gas Service		
E	SIZES-INCHES	3/8-2	1-12	1-12	3/4-2	3/4-2	1-12	1-12	1/2-8	Stainless Steel	316/420 ^d	316/420	304/420	Hycar	Stainless Steel or 17-4PH ^o	Carbon or Inconel ^f
	Max. Initial Pressure-psi	250	125	250	250	300	150	300	600							
	Max. Initial Temperature ² -°F	450	450	450	400	750	500	750	750							
	Min. Differential ¹ -psi ^b	10/30/50	10/30/50	10/30/50	10/30/50	10/30/50	10/30/50	10/30/50	10/30/50							
E2	SIZES-INCHES	3/4-2	1-12	—	3/4-2	—	—	—	—	Hycar	316	—	304/420	—	Stainless Steel	Carbon Steel
	Max. Initial Pressure-psi	15	15	—	15	—	—	—	—							
	Max. Initial Temperature ² -°F	250	250	—	250	—	—	—	—							
	Min. Differential ¹ -psi ^b	3	3	—	3	—	—	—	—							
E5	SIZES-INCHES	3/4-2	1-12	1-12	3/4-2	3/4-2	1-12	1-12	—	Hycar	316/420	316/420	304/420	304/420	Stainless Steel	Carbon Steel
	Max. Initial Pressure-psi	250	125	250	250	300	150	300	—							
	Max. Initial Temperature ² -°F	450	450	450	400	600	500	600	—							
	Min. Differential ¹ -psi ^b	5	5	5	5	5	5	5	—							
E6	SIZES-INCHES	3/4-2	1-12	3/4-2	—	—	—	—	—	Hycar	—	316/420	—	Hycar	Stainless Steel	Carbon Steel
	Max. Initial Pressure-psi	250	125	250	250	—	—	—	—							
	Max. Initial Temperature ² -°F	200	200	200	200	—	—	—	—							
	Min. Differential ¹ -psi ^b	10	10	10	10	—	—	—	—							
C34	SIZES-INCHES	1-2	2-6	2-6	—	—	—	—	—	Hycar	—	303/304	—	Hycar	Stainless Steel	Carbon Steel
	Max. Initial Pressure-psi	200	165	200	—	—	—	—	—							
	Max. Initial Temperature ² -°F	200	200	200	—	—	—	—	—							
	Min. Differential ¹ -psi ^b	10	10	10	—	—	—	—	—							

- A. Main Valves for corrosive fluids or costly gases require special materials.
- B. Bronze body and blind flange only.
- C. Minimum Differential is the smallest permissible difference between initial pressure (measured at the inlet) and the delivery pressure (measured at the outlet) of the main valve.
- D. Secoweld seat construction described in options section is regularly furnished for service pressures 400 psi and higher.
- E. 17-4 PH stems are furnished for service temperatures exceeding 600°F.
- F. Inconel springs are furnished for services pressure exceeding 400 psi and /or temperatures exceeding 600°F
- G. Standard spring (HP) requires minimum 30 PSI differential. 50 PSI is recommended minimum differential. Use optional Low ^P (LP) main spring for 15 psi minimum differential. 10 psi minimum differential is attainable by adding base bypass and 1/16" bleed port.

COMBINATION REGULATOR

TYPE ED SERIES PRESSURE REGULATOR

CAST IRON or STEEL - Pressures to 600 PSIG at 750°F

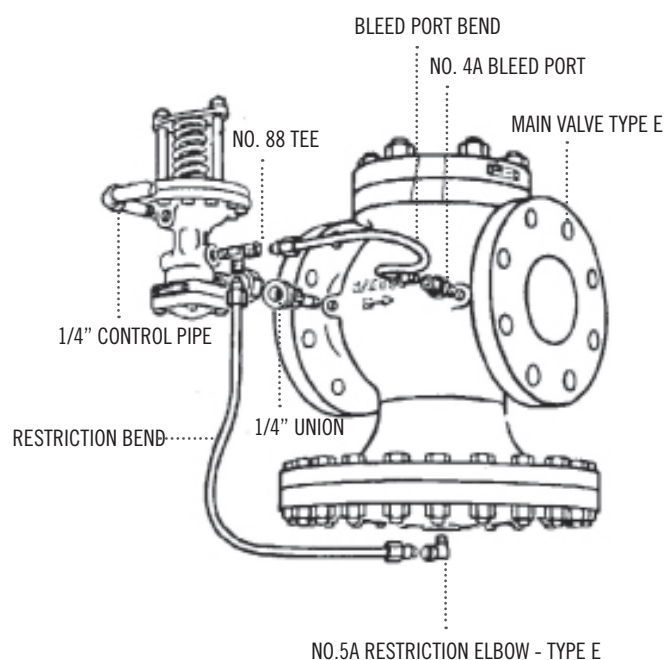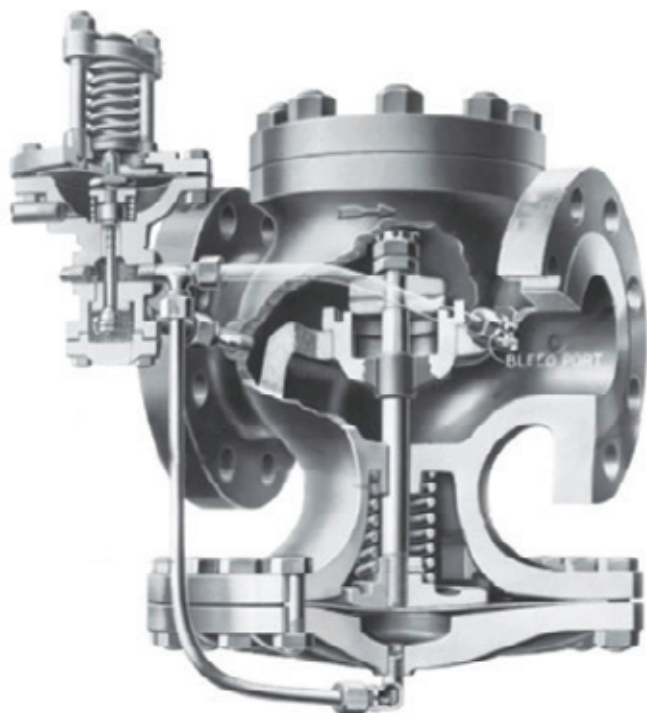


APPLICATION

- Pressure Regulation for Steam Distribution
- Single Point or Multiple use Applications
- Pressure Control for Steam Plants
- District Heating Systems
- Single Stage Reductions
- Two Stage Reductions
- Parallel Reduction

TYPE ED SERIES PRESSURE REGULATOR

VALVE INFO PAGE 32 / PILOT INFO PAGE 52

DIMENSIONS inches(mm)


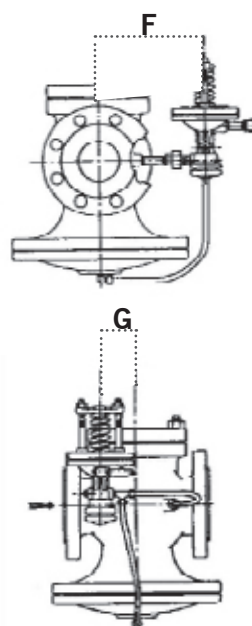


Valve is tapped so that
Pilot may be mounted
on either side.

SIZE	F	G
3/8 (10)	5 3/8 (136)	11/4 (32)
1/2 (15)	5 3/8 (136)	11/4 (32)
3/4 (20)	5 3/8 (136)	13/8 (35)
1 (25)	5 3/4 (146)	11/2 (38)
1 1/4 (32)	6 (152)	17/8 (48)
1 1/2 (40)	6 1/4 (159)	2 (51)
2 (60)	6 5/8 (168)	2 1/8 (54)
2 1/2 (65)	6 3/4 (171)	2 3/8 (60)
3 (80)	7 1/4 (184)	2 3/4 (70)
4 (100)	8 (203)	2 1/2 (89)
5 (125)	9 (229)	3 1/2 (89)
6 (150)	9 7/8 (251)	4 (102)
8 (200)	10 1/2 (267)	6 1/4 (159)
10 (250)	12 1/2 (318)	6 (152)
12 (300)	14 (356)	8 1/2 (216)

TYPE E2D SERIES PRESSURE REGULATOR

CAST IRON - PRESSURES to 15 PSIG max.

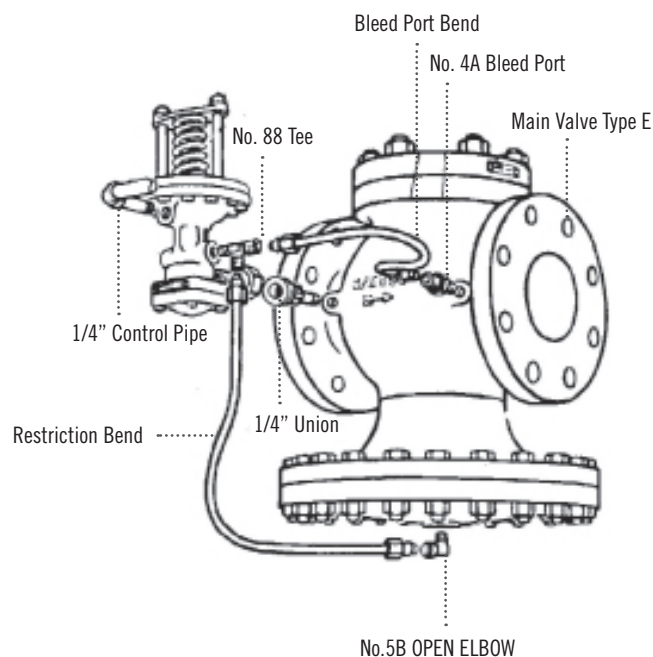
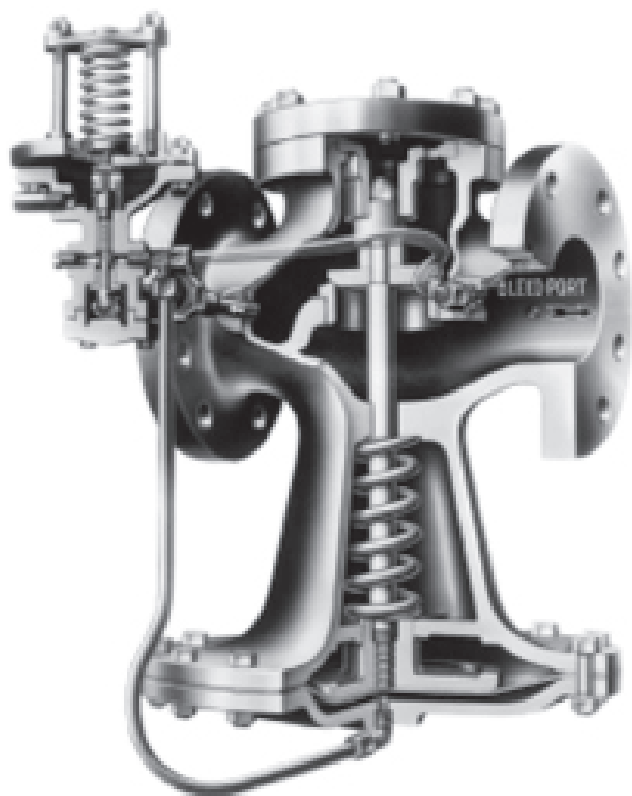


APPLICATION DATA

- Pressure Regulating for Steam Distribution
- Single Point or Multiple use Applications
- Single Stage Reduction
- Parallel Reduction
- Low Pressure Drop to Operate Valve
- Instantaneous Hot Water Heaters with low supply pressures (with the addition of a T14 pilot)

TYPE E2D PRESSURE REGULATOR

VALVE INFO PAGE 32 / PILOT INFO PAGE 52

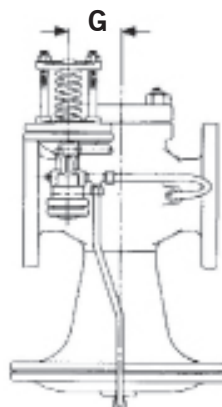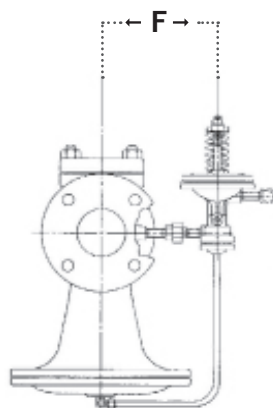

Valve is tapped so that Pilot may be mounted on either side.


DIMENSIONS inches(mm)

SIZE	F	G
3/4 (20)	5 5/8 (143)	13/8 (35)
1 (25)	5 3/4 (146)	11/2 (38)
1 1/4 (32)	6 (152)	1 7/8 (48)
1 1/2 (40)	6 1/4 (159)	2 (51)
2 (50)	6 5/8 (165)	2 1/8 (54)
2 1/2 (65)	6 3/4 (171)	2 3/8 (60)
3 (80)	7 1/4 (184)	2 3/4 (70)
4 (100)	7 3/8 (187)	3 1/2 (89)
5 (125)	8 1/8 (206)	3 1/2 (89)
6 (150)	8 1/2 (216)	4 (102)
8 (200)	9 3/8 (238)	6 1/4 (159)
10 (250)	11 (279)	6 (152)

TYPE ED & ED2

INTEGRAL MOUNT PRESSURE REGULATOR

CAST IRON OR STEEL- Pressures to 600 PSIG at 750°F

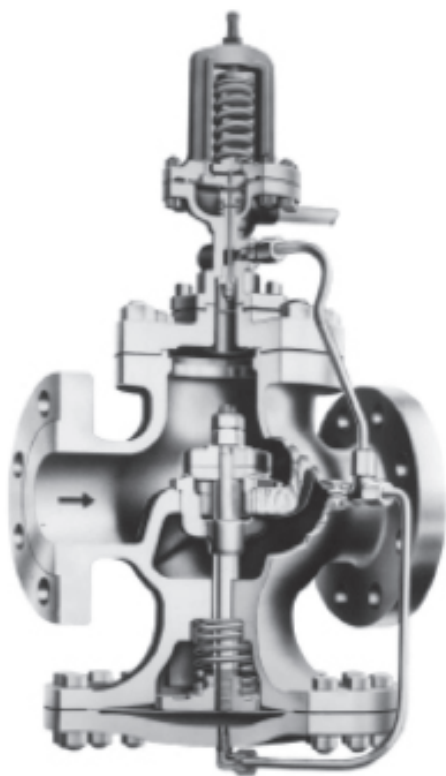

APPLICATION DATA

- Pressure Regulating for Steam Distribution where space is limited



TYPE ED INTEGRAL MOUNT PRESSURE REGULATOR

VALVE INFO PAGE 32 / PILOT INFO PAGE 52

DIMENSIONS

inches(mm)


SIZE	F	G
3/8 (10)	5 1/4 (133)	15 3/4 (400)
1/2 (15)	5 1/4 (133)	15 3/4 (400)
3/4 (20)	5 3/8 (136)	17 (432)
1 (25)	5 1/2 (140)	18 1/2 (470)
1 1/4 (32)	5 3/4 (148)	18 1/2 (470)
1 1/2 (40)	6 (152)	19 1/2 (495)
2 (50)	6 1/2 (165)	20 5/8 (524)
2 1/2 (65)	7 (178)	21 3/4 (552)
3 (80)	7 3/8 (187)	23 1/2 (597)
4 (100)	8 7/8 (225)	27 1/4 (692)
5 (125)	10 (254)	28 5/8 (727)
6 (150)	11 3/8 (279)	31 1/2 (792)
8 (200)	12 3/4 (324)	35 3/8 (899)
10 (250)	15 1/2 (393)	43 3/4 (1111)
12 (300)	18 (457)	47 3/4 (1213)

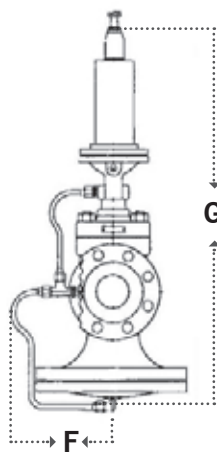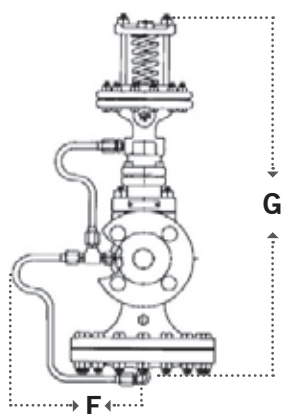

* For D2 Pilot, add 5 1/4" (133) to this dimension.

TYPE EA SERIES PRESSURE REGULATOR

CAST IRON or STEEL - Pressures to 600 PSIG at 750°F

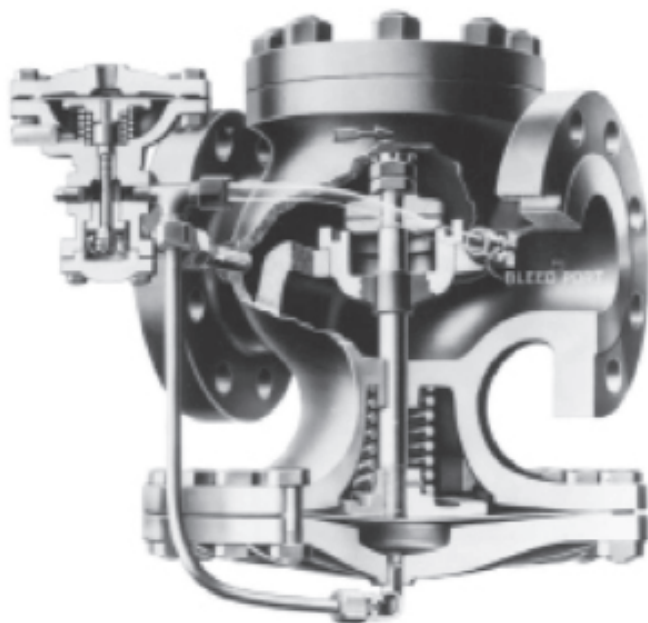

TYPE EA PRESSURE REGULATOR



VALVE INFO PAGE 32 / PILOT INFO PAGE 54

APPLICATION DATA


- Pressure Regulating for Steam Distribution
- Single Point or Multiple use Applications
- Pressure Control for Steam Plants
- District Heating Systems
- Single Stage Reductions
- Two Stage Reductions
- Parallel Reduction
- Control from Remote Location
- Temperature Regulating (with addition of T60 Series Pneumatic Temperature Pilot)

DIMENSIONS CHART - Fraction sizes (mm)

SIZE	F	G
3/8 (10)	5 3/8 (136)	1 1/4 (32)
1/2 (15)	5 5/8 (136)	1 1/4 (32)
3/4 (20)	5 3/8 (143)	1 3/8 (35)
1 (25)	5 3/4 (146)	1 1/2 (38)
1 1/4 (32)	6 (152)	1 7/8 (48)
1 1/2 (40)	6 1/4 (159)	2 (51)
2 (50)	6 5/8 (168)	2 1/8 (54)
2 1/2 (65)	6 3/4 (171)	2 3/8 (60)
3 (80)	7 1/4 (184)	2 3/4 (70)
4 (100)	8 (203)	3 1/2 (89)
5 (125)	9 (229)	3 1/2 (89)
6 (150)	9 7/8 (251)	4 (102)
8 (200)	10 1/2 (267)	6 1/4 (159)
10 (250)	12 1/2 (318)	6 (152)
12 (300)	14 (356)	8 1/2 (216)

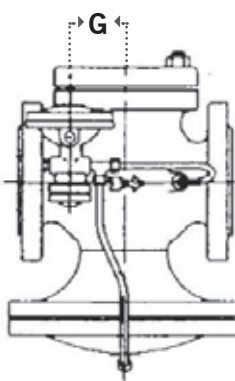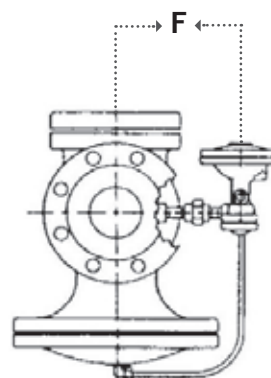



Valve is tapped so that Pilot may be mounted on either side.

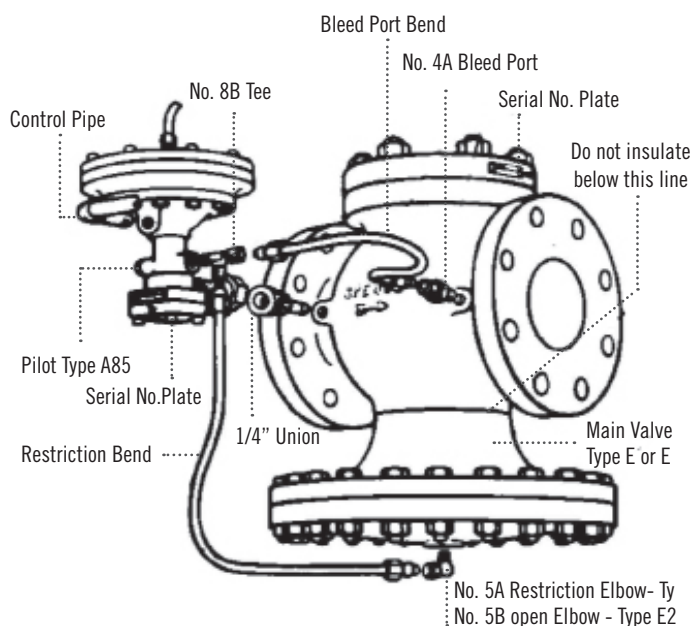

TYPE ET14

TEMPERATURE REGULATOR

CAST IRON or STEEL - Controls 20 to 500°F

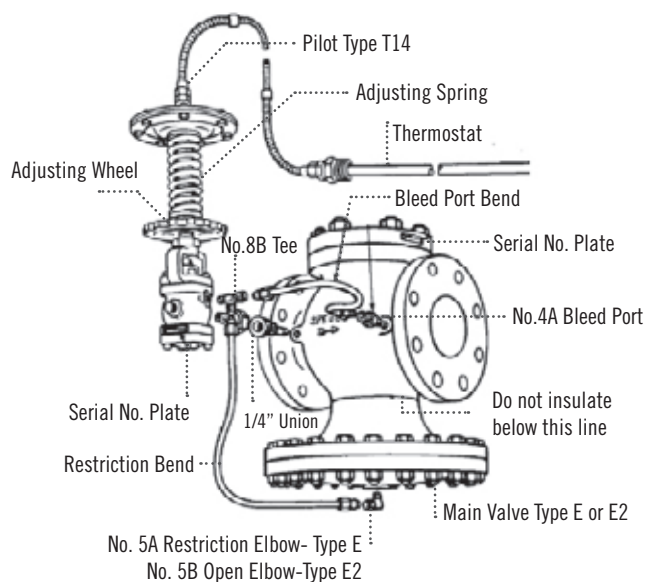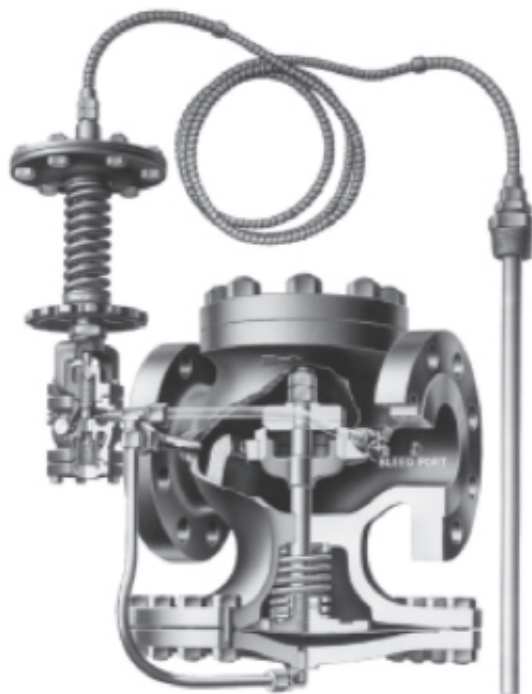

APPLICATION DATA

- Temperature Regulation for Batch Process
- Storage Heaters (Water, Fuel Oil or Chemical)
- Air Heating



TYPE ET14 TEMPERATURE REGULATOR

VALVE INFO PAGE 32 / PILOT INFO PAGE 80

DIMENSIONS

inches(mm)

SIZE	F	G
3/8 (10)	5 3/8 (136)	1 1/4 (32)
1/2 (15)	5 3/8 (136)	1 1/4 (32)
3/4 (20)	5 5/8 (143)	1 3/8 (35)
1 (25)	5 3/4 (146)	1 1/2 (38)
1 1/4 (32)	6 (152)	1 7/8 (48)
1 1/2 (40)	6 1/4 (159)	2 (51)
2 (50)	6 5/8 (168)	2 1/8 (54)
2 1/2 (65)	6 3/4 (171)	2 3/8 (60)
3 (80)	7 1/4 (184)	2 3/4 (70)
4 (100)	8 (203)	3 1/2 (89)
5 (125)	9 (229)	3 1/2 (89)
6 (150)	9 7/8 (251)	4 (102)
8 (200)	10 1/2 (267)	6 1/4 (159)
10 (250)	12 1/2 (318)	6 (152)
12 (300)	14 (356)	8 1/2 (216)

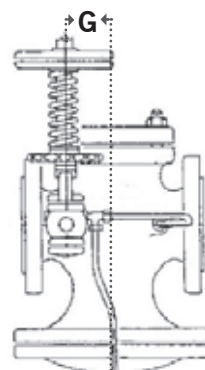


Valve is tapped so that Pilot may be mounted on either side.

TYPE ET14D SERIES

PRESSURE LIMITING TEMPERATURE REGULATOR

CAST IRON or STEEL - CONTROLS from 20°F to 500°F

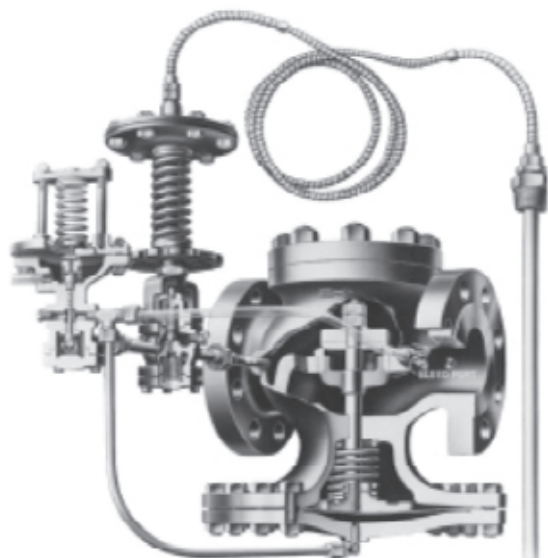



APPLICATION DATA

- Temperature & Pressure Regulation for large volume heat Exchangers
- Storage Heaters
- Jacketed Kettles
- Vats

TYPE ET14D TEMPERATURE & PRESSURE REGULATOR

VALVE INFO PAGE 32 / D PILOT INFO PAGE 52
T14 PILOT INFO PAGE 80

DIMENSIONS inches(mm)

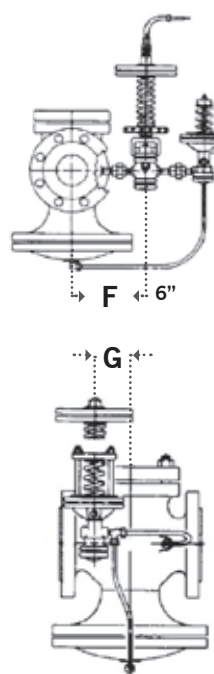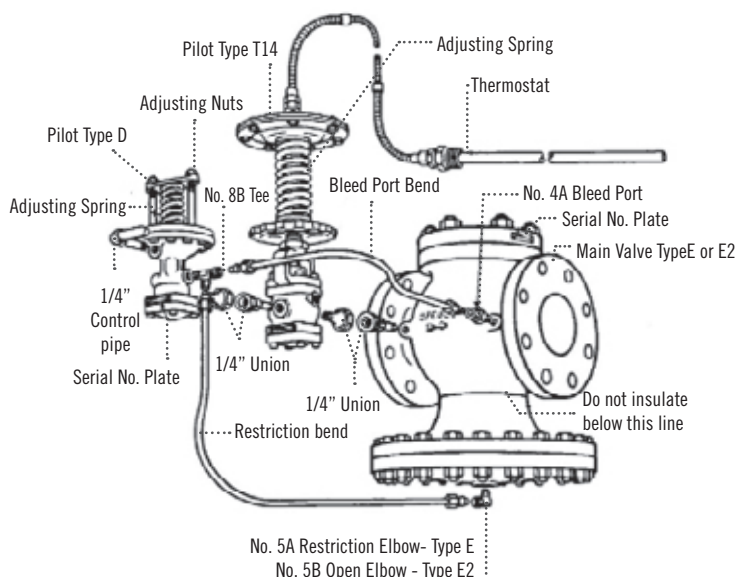

SIZE	F	G
3/8 (10)	5 3/8 (136)	11/4 (32)
1/2 (15)	5 3/8 (136)	11/4 (32)
3/4 (20)	5 3/8 (143)	13/8 (35)
1 (25)	5 3/8 (146)	11/2 (38)
1 1/4 (32)	6 (152)	17/8 (48)
1 1/2 (40)	6 1/4 (159)	2 (51)
2 (50)	6 5/8 (168)	2 1/8 (54)
2 1/2 (65)	6 3/4 (171)	2 3/8 (60)
3 (80)	7 1/4 (184)	2 3/4 (70)
4 (100)	8 (203)	3 1/2 (89)
5 (125)	9 (229)	3 1/2 (89)
6 (150)	9 7/8 (251)	4 (102)
8 (200)	10 1/2 (267)	6 1/4 (159)
10 (250)	12 1/2 (318)	6 (152)
12 (300)	14 (356)	8 1/2 (216)

Valve is tapped so that Pilot may be mounted on either side.

TYPE ET124 / ET134 & E2T134

TEMPERATURE & PRESSURE REGULATOR

CAST IRON or STEEL

APPLICATION DATA

- Instantaneous Heaters
- Process Heaters
- Jacketed Kettles
- Vats
- Storage Heaters
- Drivers
- Oil Heaters
- Ovens
- Batch Heating




MODELS

- **ET124** for heater operating pressures between 20 and 125 psi.
- **ET134** for heater operating pressures up to 20 psi.
- **E2T134** for heater operating pressures up to 15 psi.

E VALVE INFO PAGE 32 / E2 VALVE INFO PAGE 34
PILOT INFO PAGE 78

DIMENSIONS

inches(mm)

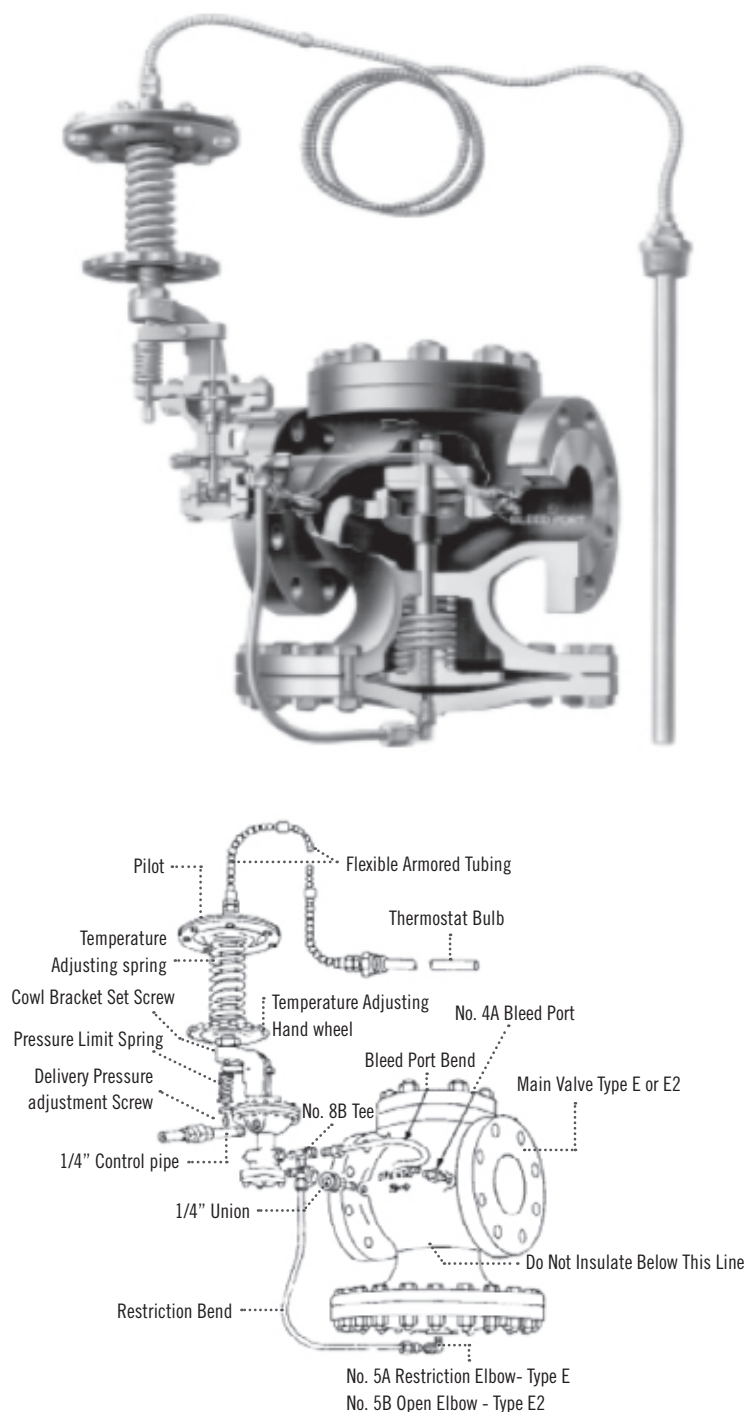



Valve is tapped so that Pilot may be mounted on either side.

SIZE	F	G	
		E	E2
3/8 (10)	5 3/8 (136)	1 1/4 (32)	-
1/2 (15)	5 3/8 (136)	1 1/4 (32)	-
3/4 (20)	5 3/8 (143)	1 3/8 (35)	1 3/8 (35)
1 (25)	5 3/8 (146)	1 1/2 (38)	1 1/2 (38)
1 1/4 (32)	6 (152)	1 7/8 (48)	1 7/8 (48)
1 1/2 (40)	6 1/4 (159)	2 (51)	2 (51)
2 (50)	6 5/8 (168)	2 1/8 (54)	2 1/8 (54)
2 1/2 (65)	6 3/4 (171)	2 3/8 (60)	2 3/8 (60)
3 (80)	7 1/4 (184)	2 3/4 (70)	2 3/4 (70)
4 (100)	8 (203)	3 1/2 (89)	3 1/2 (89)
5 (125)	9 (229)	3 1/2 (89)	3 1/2 (89)
6 (150)	9 7/8 (251)	4 (102)	4 (102)
8 (200)	10 1/2 (267)	6 1/4 (159)	6 1/4 (159)
10 (250)	12 1/2 (318)	6 (152)	6 (152)
12 (300)	14 (356)	8 1/2 (216)	7 1/2 (216)

TYPE ED210

REGULATOR ELECTRONIC MODULATION

DELIVERY PRESSURES to 150 PSIG

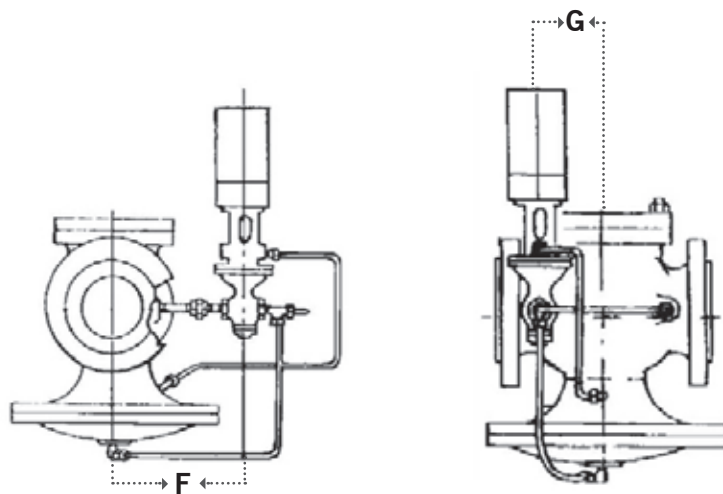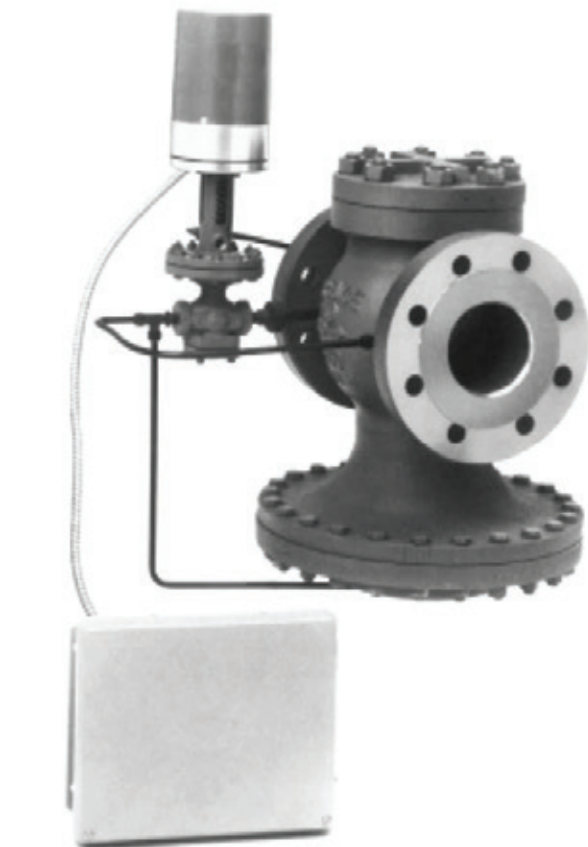

Valve is tapped so that Pilot may be mounted on either side.

APPLICATION DATA

- Main Valve adapted to 4-20 mA Signal
- Requires balanced Main Valve

TYPE ED210 REGULATOR

VALVE INFO PAGE 32 / PILOT INFO PAGE 74

DIMENSIONS inches(mm)

SIZE	F	G
3/8 (10)	5 3/8 (136)	1 1/4 (32)
1/2 (15)	5 3/8 (136)	1 1/4 (32)
3/4 (20)	5 5/8 (143)	1 3/8 (35)
1 (25)	5 3/4 (146)	1 1/2 (38)
1 1/4 (32)	6 (152)	1 7/8 (48)
1 1/2 (40)	6 1/4 (159)	2 (51)
2 (50)	6 5/8 (168)	2 1/8 (54)
2 1/2 (654)	6 3/4 (171)	2 3/8 (60)
3 (80)	7 1/4 (184)	2 3/4 (70)
4 (100)	8 (203)	3 1/2 (89)
5 (125)	9 (229)	3 1/2 (89)
6 (150)	9 7/8 (251)	4 (102)
8 (200)	10 1/2 (267)	6 1/4 (159)
10 (250)	12 1/2 (318)	6 (152)
12 (300)	14 (356)	8 1/2 (216)

TYPE ED208D

PRESSURE REGULATOR ELECTRONIC STARTUP PILOT OPERATED

DELIVERY PRESSURES to 150 PSIG

APPLICATION DATA

- Electronic Control of Slow Startup and/or Slow Shutdown of Pressure Regulation
- Building Heating Systems
- Can save more than 4 times its cost in building heating in one year.
- Requires balanced Main Valve




TYPE ED208D PRESSURE REGULATOR

VALVE INFO PAGE 32 / D PILOT INFO PAGE 52
D208 PILOT INFO PAGE 72

DIMENSIONS inches(mm)


SIZE	F	G
3/8 (10)	5 3/8 (136)	11/4 (32)
1/2 (15)	5 3/8 (136)	11/4 (32)
3/4 (20)	5 5/8 (143)	13/8 (35)
1 (25)	5 3/4 (146)	11/2 (38)
1 1/4 (32)	6 (152)	17/8 (48)
1 1/2 (40)	6 1/4 (159)	2 (51)
2 (50)	6 5/8 (168)	2 1/8 (54)
2 1/2 (65)	6 3/4 (171)	2 3/8 (60)
3 (80)	7 1/4 (184)	2 3/4 (70)
4 (100)	8 (203)	3 1/2 (89)
5 (125)	9 (229)	3 1/2 (89)
6 (150)	9 7/8 (251)	4 (102)
8 (200)	10 1/2 (267)	6 1/4 (159)
10 (250)	12 1/2 (318)	6 (152)
12 (300)	14 (356)	8 1/2 (216)

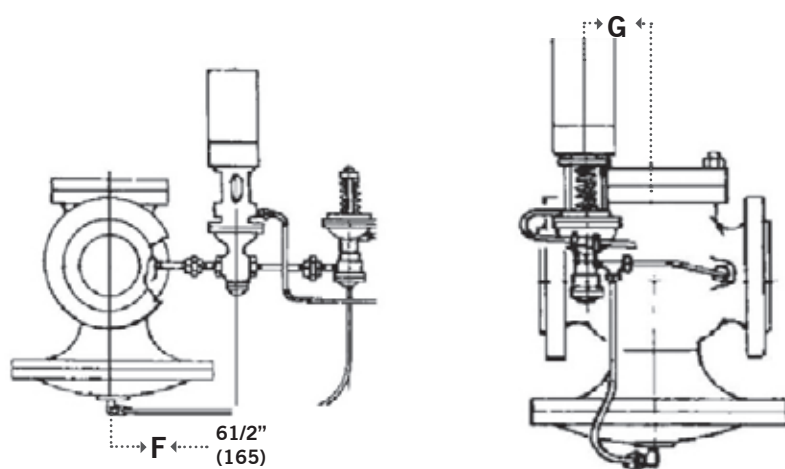

Valve is tapped so that Pilot may be mounted on either side.

MAIN VALVE

TYPE E MAIN VALVE

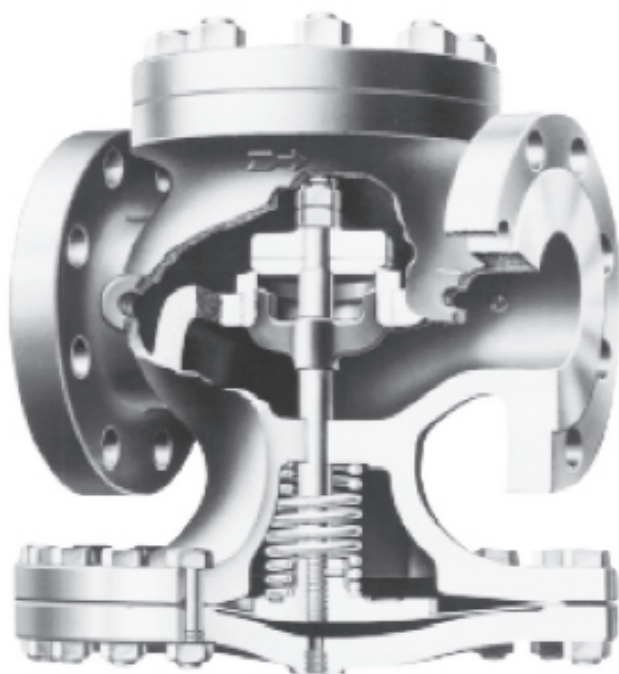

TYPE E MAIN VALVE

SIZING INFO PAGE 114

VALVE RATINGS

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)

CAST IRON

B16.4 Class 250 NPT	250(17.2)	@ 450(232)
B16.1 Class 125 Flanged	125(8.6)	@ 450(232)
B16.1 Class 250 Flanged	250(17.2)	@ 450(232)

CAST STEEL

B16.34 Class 300 NPT	300(21.0)	@ 600 (315) †
B16.34 Class 150 Flanged	150(10.3)	@ 500 (260)
B16.34 Class 300 Flanged	300(21.0)	@ 600 (315) †
B16.34 Class 600 Flanged	600(41.4)	@ 600 (315) †

750°F (400°C) construction available on request.

Other pressure/temperature ratings available; consult factory

Maximum downstream pressure is 300 psi.

Canadian Registration # OC 0591.9C

SIZE 3/8" - 12" -

PRESSURES TO 600 PSIG AT 750°F

- Normally Closed
- Single Seat
- Balanced Metal Diaphragms
- Protected Main Spring
- Fluid, Gas & Vapor Applications
- Multiple Trims for Precise Sizing
- ANSI/FCI 70-2 Class IV Shutoff
- FCI 70-3 Class VI Shutoff
- Virtually Frictionless for long Service Life
- Packless Construction
- Easy In-line Maintenance
- Wide Variety of Pilots for Many Applications
- Minimum Operating P 10psi (.7 bar)
- Lifetime Warranty against Wiredrawing of Seat & Disc*

APPLICATION DATA

- Pressure Regulating for Steam Distribution
- Regulating for Process Control (Temperature or Pressure)
- Maintain Back Pressure or Differential Pressure
- For use with Self-contained, Pneumatic or Electronic Pilots
- Single Point or Multiple Use Applications
- Slow Start-up or Shutdown

OPTIONS (SEE PAGE 42)

- Composition Disc
- Balanced Construction
- Insulcap Insulating Jacket
- High Temperature Construction
- Low ΔP (LP) Main Spring
- Parabolic Disc
- Integral Mount Pilot
- Secoweld
- Dashpot
- EZ Connections

TYPICAL CONFIGURATIONS

PRESSURE REDUCING.....	TYPE ED SERIES
AIR ADJUSTED.....	TYPE EA SERIES
BACK PRESSURE.....	TYPE EQ SERIES
PUMP GOVERNOR.....	TYPE EP SERIES
LOAD ALLOCATING.....	TYPE EFD
AIR CONTROLLED.....	TYPE EAP60
ELECTRONIC SLOW START.....	TYPE ED208D
SOLENOID CONTROLLED.....	TYPE EMD
SOLENOID ACTUATED.....	TYPE EM
DIFFERENTIAL.....	TYPE EN
TEMPERATURE CONTROL.....	TYPE ET SERIES

RATED FLOW COEFFICIENTS (Cv)

SEAT FACTOR	REGULATION SIZE															
	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12	
Full	1.5	2.8	5.4	8.8	14.1	19.8	31	44	74	109	169	248	444	706	1113	
Full 75%	--	2.2	4.2	7.2	11.1	15.9	22.9	37	56	88	136	188	353	558	880	
Full 50%	--	1.7	2.6	6.3	7.4	11.3	17.7	25	42	65	94	139	252	400	631	
Normal	.66	1.55	4.8	7.5	10.4	14.6	17.6	24	43	78	115	151	249	377	631	
Normal 75%	--	--	--	--	--	--	--	18	34	62	89	110	187	294	463	
Normal 50%	--	--	--	--	--	--	--	14	26	46	65	83	139	230	363	

*When installed according to factory specifications.


TYPE E MAIN VALVE

SPECIFICATION

The valve shall be self-operated external pilot type, single seated, metal diaphragm actuated, normally closed design. The valve will function quickly and shut tight on dead end service. Internal parts including seats, discs, stems and diaphragms shall be of stainless steel. There shall be easy to maintain with all parts accessible without removal from the line.

MATERIALS OF CONSTRUCTION

Body, Cast Iron	ASTM A126 CL B
Body, Cast Steel	ASTM A216 WCB
Stem	303 St. Stl. ASTM A582
Disc 3/4 - 5"	420 St. Stl. ASTM A743 CA-40
Disc 6 - 12"	304 St. Stl. ASTM A167/A240
Seat 3/4 - 5"	420 St. Stl. ASTM A743 CA-40
Seat 6 - 12"	316 St. Stl. ASTM A743 CF-8M
Gasket	Non-Asbestos
Diaphragm	Stainless Steel. MIL-S-5059C
Spring	Steel

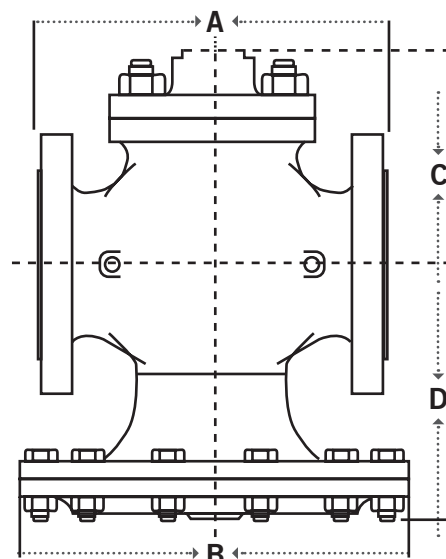

TYPE E MAIN VALVE

FITTINGS ON PAGE 50

DIMENSIONS inches(mm) AND WEIGHTS POUNDS (kg)


SIZE	FACE TO FACE DIMENSIONS					B	C					D*	APPROX. WT.			
	A						Std. Mount		Integral Mount				ANSI NPT	ANSI 125,150	ANSI 250,300	ANSI 600
	ANSI NPT	ANSI 125,150	ANSI 250	ANSI 300	ANSI 600		ANSI 600	CI & Brz All	Steel	Steel 600						
3/8 (10)	4 3/8 (111)	-- --	-- --	-- --	-- --	57/8 (149)	23/4 (70)	-- --	31/2 (89)	31/2 (89)	-- --	51/4 (133)	14 (6)	-- --	-- --	-- --
1/2 (12)	4 3/8 (111)	-- --	-- --	-- --	6 (152)	57/8 (149)	23/4 (70)	23/4 (70)	33 1/2 (89)	31/2 (89)	35/8 (92)	51/4 (133)	14 (6)	-- --	-- --	20 (9.1)
3/4 (19)	4 3/4 (111)	-- --	-- --	-- --	63/8 (162)	61/2 (162)	27/8 (73)	37/8 (98)	35/8 (92)	35/8 (92)	41/2 (114)	51/2 (140)	18 (8)	-- --	-- --	28 (13)
1 (25)	53/8 (137)	51/2 (140)	6 (152)	61/2 (165)	61/2 (165)	7 (178)	35/8 (92)	41/4 (108)	43/8 (111)	43/8 (111)	43/4 (121)	61/4 (159)	23 (10)	26 (12)	31 (14)	32 (15)
1 1/4 (32)	61/2 (165)	63/4 (171)	71/4 (184)	77/8 (200)	77/8 (200)	77/8 (200)	41/8 (105)	45/8 (117)	4 (102)	45/8 (117)	5 (127)	61/2 (165)	33 (15)	37 (17)	41 (19)	45 (20)
1 1/2 (38)	71/4 (184)	67/8 (175)	73/8 (187)	8 (203)	8 (203)	83/4 (222)	43/8 (111)	51/8 (130)	43/8 (111)	5 (127)	-- --	71/8 (181)	43 (20)	47 (21)	55 (25)	58 (26)
2 (51)	7 1/2 (191)	81/2 (216)	9 (229)	101/4 (260)	101/4 (260)	97/8 (251)	51/4 (133)	53/4 (146)	5 (127)	5 5/8 (143)	5 3/4 (146)	7 5/8 (194)	62 (28)	73 (33)	78 (35)	83 (38)
2 1/2 (64)	-- --	9 3/8 (238)	10 (254)	11 1/4 (286)	11 1/4 (286)	10 7/8 (276)	5 3/4 (146)	7 7/8 (200)	5 1/2 (140)	6 3/8 (152)	8 1/4 (210)	8 3/8 (213)	-- --	95 (43)	100 (45)	130 (59)
3 (76)	-- --	10 (254)	10 3/4 (273)	12 1/4 (311)	12 1/4 (311)	11 3/4 (298)	6 5/8 (168)	9 1/8 (232)	6 3/8 (162)	7 1/8 (181)	-- --	9 1/4 (235)	-- --	125 (57)	140 (64)	175 (80)
4 (102)	-- --	11 7/8 (302)	12 1/2 (318)	12 1/2 (318)	14 1/2 (368)	14 3/4 (375)	7 5/8 (194)	10 5/8 (270)	7 1/4 (184)	8 (203)	-- --	117/8 (302)	-- --	210 (95)	230 (105)	310 (141)
5 (102)	-- --	13 5/8 (346)	14 1/2 (368)	14 1/2 (368)	14 1/2 (419)	16 7/8 (429)	8 1/2 (216)	12 1/2 (318)	8 1/8 (206)	8 1/2 (216)	-- --	12 1/2 (318)	-- --	295 (134)	310 (141)	490 (223)
6 (152)	-- --	15 1/8 (384)	16 (406)	16 (406)	17 3/8 (441)	19 3/4 (502)	10 (254)	13 3/4 (349)	9 1/2 (241)	9 1/2 (241)	13 5/8 (346)	14 1/8 (359)	-- --	420 (191)	470 (214)	655 (298)
8 (203)	-- --	19 (483)	20 (508)	20 (508)	21 5/8 (549)	22 1/2 (572)	11 1/2 (292)	15 3/8 (391)	11 3/4 (286)	11 3/4 (298)	-- --	171/4 (438)	-- --	700 (318)	710 (323)	1070 (486)
10 (254)	-- --	23 5/8 (600)	25 (635)	25 (635)	-- --	28 (711)	13 3/4 (349)	-- --	-- --	-- --	-- --	23 3/8 (438)	-- --	1240 (563)	1300 (591)	-- --
12 (305)	-- --	26 1/2 (673)	28 (711)	28 (711)	-- --	33 (838)	15 7/8 (403)	-- --	-- --	-- --	-- --	25 1/4 (611)	-- --	2060 (936)	2140 (972)	-- --

*Add 65% to D dimension for stem removal clearance.

TYPE E2 MAIN VALVE

LOW PRESSURE / LOW DIFFERENTIAL

SIZE 3/4 " - 10" -
PRESSURES TO 15 PSIG AT 250°F

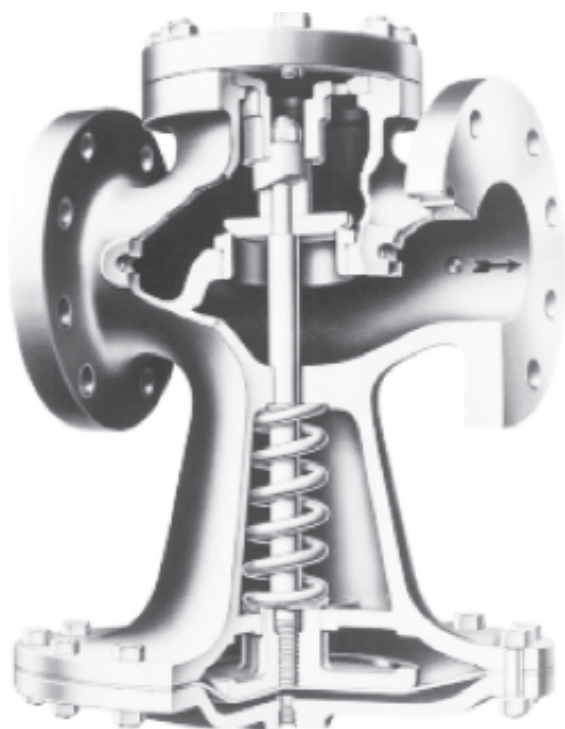

TYPE E2 MAIN VALVE

SIZING INFO PAGE 114

- Normally Closed
- Single Seat
- Nitrile Diaphragm
- Protected Main Spring
- Gas & Steam Applications
- Accurate Regulation Unaffected by Service Conditions
- ANSI/FCI 70-2 Class IV Shutoff
- Virtually Frictionless for Long Service Life
- Packless Construction
- Easy In-line Maintenance
- Wide Variety of Pilots for Many Applications
- Minimum Operating Pressure 3 psi (.2 bar)
- Lifetime Warranty against Wire Drawing of Seat & Disc *

APPLICATION DATA

- Pressure Regulating for Steam Distribution
- Regulating for Process Control (Temperature or Pressure)
- Maintain Back Pressure or Differential Pressure
- For use with Self-contained, Pneumatic or Electronic Pilots
- Single Point or Multiple Use Applications
- Slow Start-up or Shutdown

OPTIONS

- Composition Disc for liquid, air or gas service
- Insulcap Insulating Jacket • Integral Mount Pilot
- EZ Connections

TYPICAL CONFIGURATIONS

PRESSURE REDUCINGTYPE E2D
AIR ADJUSTEDTYPE E2A SERIES
BACK PRESSURETYPE E2Q
LOAD ALLOCATINGTYPE E2FD
AIR CONTROLLINGTYPE E2AP60
ELECTRONIC SLOW START.....TYPE E2D208D
SOLENOID CONTROLLED.....TYPE E2MD
SOLENOID ACTUATED.....TYPE E2M
DIFFERENTIALTYPE E3N
TEMPERATURE CONTROLTYPE E2T14
TEMP. & PRESSURE CONTROL.....TYPE E2T134

VALVE RATINGS

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)
CAST IRON		
B16.4 Class 250 NPT	15 (1.03)	250°F (121°C)
B16.1 Class 125 Flanged 1	5 (1.03)	250°F (121°C)

Canadian Registration # OC 0591.9C

RATED FLOW COEFFICIENTS (Cv)

SEAT FACTOR	REGULATOR SIZE												
	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12
Full	7.6	11.7	18.9	27.4	44	68	96	143	202	255	465	748	1118
70%-75%	--	8.8	13.2	19.2	30.8	47.6	67.2	100	141	178	--	---	--
46%	--	--	--	12.3	--	30.6	--	64.4	--	115	--	336	--

* When installed according to factory specifications.


TYPE E2 MAIN VALVE

SPECIFICATION

The valve shall be self-operated, external pilot type, single seated, Nitrile diaphragm actuated, normally closed design. The valve will function quickly and shut tight on dead end service. Internal parts including seats, discs and stems shall be of stainless steel. There shall be no springs in the steam flow path and no stuffing box. The valve shall be easy to maintain with all parts accessible without removal from the line.

MATERIALS OF CONSTRUCTION

Body, Cast Iron ASTM A 126 Cl. B
 Stem 303 St. Stl. ASTM A582
 Disc 3/4 - 2" 420 St. Stl. ASTM A743 CA-40
 Disc 2-1/2 - 10" 304 St. Stl. ASTM A167/A240
 Seat 420 St. Stl. ASTM A743 CA-40
 Gasket Non-asbestos
 Diaphragm Nitrile
 Spring Steel

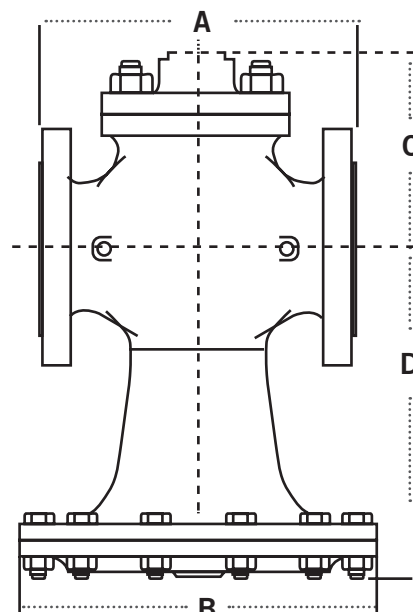

TYPE E2 MAIN VALVE

FITTINGS ON PAGE 50

DIMENSIONS inches(mm) AND WEIGHTS POUNDS (kg)

SIZE	A		OTHER DIMENSION				APPROX. WT.	
	CL ANSI NPT	CL ANSI 125	B	C		D*	CL ANSI NPT	CL ANSI 125
				Std. Mount	Integral Mount			
3/4 (19)	4 3/4 (121)	-- --	8 (203)	2 7/8 (73)	3 5/8 (92)	7 3/4 (149)	18 (8)	--- --
1 (25)	5 3/8 (137)	5 1/2 (140)	8 (203)	3 5/8 (92)	4 3/8 (111)	8 1/8 (206)	19 (9)	21 (10)
1 1/4 (32)	6 1/2 (165)	6 3/4 (171)	9 (229)	4 1/8 (105)	4 (101)	8 1/4 (210)	30 (14)	33 (15)
1 1/2 (28)	7 1/4 (184)	6 7/8 (175)	9 3/4 (248)	4 3/8 (111)	4 1/2 (118)	8 3/4 (222)	36 (16)	40 (18)
2 (51)	7 1/2 (191)	8 1/2 (216)	10 1/2 (267)	5 1/4 (133)	5 (127)	10 (254)	50 (23)	57 (26)
2 1/2 (64)	-- --	9 3/8 (238)	10 1/2 (267)	5 3/4 (146)	5 3/8 (136)	11 1/2 (292)	-- --	70 (32)
3 (76)	-- --	10 (254)	11 1/4 (286)	6 5/8 (168)	6 3/8 (162)	12 3/4 (324)	-- --	98 (45)
4 (102)	-- --	11 7/8 (302)	13 1/2 (343)	6 3/4 (171)	6 5/8 (168)	13 5/8 (346)	-- --	135 (61)
5 (127)	-- --	13 5/8 (346)	14 1/4 (362)	7 1/2 (191)	7 3/8 (187)	15 (381)	-- --	185 (84)
6 (152)	-- --	15 1/8 (384)	16 (406)	7 7/8 (200)	7 (178)	16 5/8 (422)	-- --	250 (114)
8 (203)	-- --	19 (483)	20 (508)	9 1/2 (241)	9 1/4 (235)	19 7/8 (505)	-- --	415 (189)
10 (254)	-- --	23 5/8 (600)	24 (610)	10 7/8 (276)	-- --	23 7/8 (606)	-- --	690 (314)

*Add 55% to D dimension for stem removal clearance.

TYPE E5 MAIN VALVE

HIGH PRESSURE-HIGH LIFT LOW DIFFERENTIAL



TYPE E5 MAIN VALVE

SIZING INFO PAGE 114

SIZE 3/4 " - 12" - PRESSURES TO 300 PSIG AT 600°F

- Normally Closed
- Single Seat
- Balanced Nitrile Diaphragm
- Protected Main Spring
- Long Main Spring Operates on 5 psi Minimum Differential
- Internal & External Condensation Chambers
- Fluid, Gas & Vapor Applications
- Accurate Regulation Unaffected by Service Conditions
- ANSI/FCI 70-2 Class IV Shutoff
- Virtually Frictionless for Long Service Life
- Packless Construction
- Easy In-line Maintenance
- Wide Variety of Pilots for Many Applications
- Lifetime Warranty against Wiredrawing of Seat & Disc *

APPLICATION DATA

- Pressure Regulating for Steam Distribution
- High Pressure / Low Differential Pressure Regulating
- Fluid Regulation
- For use with Self-contained, Pneumatic or Electronic
- Slow Start-up or Shutdown

VALVE RATINGS

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)

CAST IRON

Class 250 NPT	250(17.2) @	450 (232)
B16.1 Class 125 Flanged	125(8.6) @	450 (232)
B16.1 Class 250 Flanged	250(17.2) @	450 (232)

CAST STEEL

B16.34 Class 300 NPT	300(21.0) @	600 (315)
B16.34 Class 150 Flanged	150(10.3) @	500 (260)
B16.34 Class 300 Flanged	300(21.0) @	600 (315)

Other pressure/temperature ratings available; consult factory
Maximum downstream pressure is 300 psi.

Canadian Registration # OC 0591.9C

OPTIONS

- Composition Disc for liquid, air or gas service
- Balanced Construction • Secoweld
- Integral Mount Pilot • EZ Connections

TYPICAL CONFIGURATIONS

PRESSURE REDUCING	TYPE E5D
AIR ADJUSTED	TYPE E5A
BACK PRESSURE	TYPE E5Q
PUMP GOVERNOR	TYPE E5P
LOAD ALLOCATING	TYPE E5FD
AIR CONTROLLING	TYPE E5AP60
ELECTRONIC SLOW START	TYPE E5D208D
SOLENOID CONTROLLED	TYPE E5MD
SOLENOID ACTUATED	TYPE E5M
DIFFERENTIAL	TYPE E5N
TEMPERATURE CONTROL	TYPE E5T

RATED FLOW COEFFICIENTS (Cv)

SEAT FACTOR	REGULATOR SIZE												
	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12
Full	7.6	11.7	18.9	27.4	43	67	95	159	258	350	665	1018	1611
Normal	5.7	10.0	13.4	19.8	25	35	59	120	176	228	366	525	952

* When installed according to factory specifications.


TYPE E5 MAIN VALVE

SPECIFICATION

The valve shall be self-operated, external pilot type, single seated, diaphragm actuated, normally closed design. The valve will function quickly and shut tight on dead end service. Internal parts including seats, discs and stems shall be of stainless steel. The diaphragm shall be a balanced Nitrile material for high lift. There shall be an external condensation chamber supplied. The main valve spring shall operate on a 5 psi minimum differential. There shall be no springs in the steam flow path and no stuffing box. The valve shall be easy to maintain with all parts accessible without removal from the line.

MATERIALS OF CONSTRUCTION

Body, Cast Iron	ASTM A 126 Cl. B	Seat 3/4 - 5"	420 St. Stl. ASTM A582 Cond A
Body, Cast Steel	ASTM A216 WCB	Seat 6 - 12"	316 St. Stl. ASTM A743 CF-8M
Stem	303 St. Stl. ASTM A582	Gasket	Non-asbestos
Disc 3/4 - 5"	420 St. Stl. ASTM A582 Cond A	Diaphragm	Nitrile
Disc 6 - 12"	304 St. Stl. ASTM A167/A240	Spring	Steel

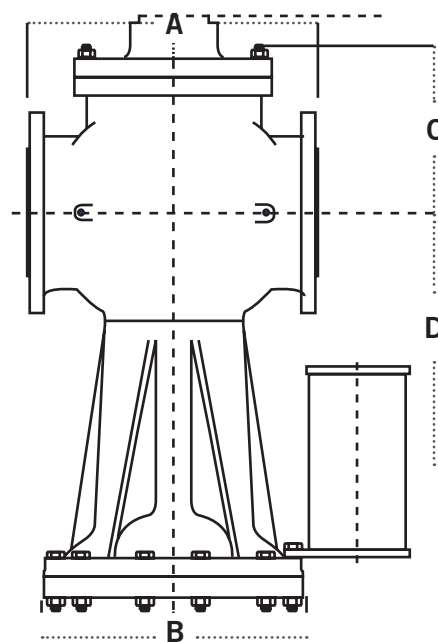

TYPE E5 MAIN VALVE

FITTINGS ON PAGE 50

DIMENSIONS inches(mm) AND WEIGHTS POUNDS (kg)


SIZE	A			B	C			D		Iron ,Brz Stl. ANSI NPT	APPROX.WT			
	ANSI NPT	ANSI 125	ANSI 250		Std. Mount	Integral Mount					Iron		Steel	
						CI	Stl.	ANSI 125	SCR 250		ANSI 125	ANSI 250	ANSI 150	ANSI 300
3/4 (19)	4 3/4 (111)	-- --	-- --	6 7/8 (175)	2 7/8 (73)	3 5/8 (92)	3 1/2 (89)	11 1/4 (286)	11 1/4 (286)	23 (10)	-- --	-- --	-- --	-- --
1 (25)	5 3/8 (137)	5 1/2 (140)	6 (152)	6 7/8 (175)	3 5/8 (92)	4 3/8 (111)	4 3/8 (111)	11 5/8 (295)	11 5/8 (295)	24 (11)	30 (14)	33 (15)	35 (16)	39 (18)
1 1/4 (32)	6 1/2 (165)	6 3/4 (171)	7 1/4 (184)	9 1/8 (232)	4 1/8 (105)	4 (102)	4 5/8 (117)	13 1/2 (343)	13 1/2 (343)	49 (22)	46 (21)	49 (22)	58 (26)	63 (29)
1 1/2 (38)	7 1/4 (184)	6 7/8 (175)	7 3/8 (187)	9 1/8 (232)	4 3/8 (111)	4 1/2 (114)	5 (127)	13 5/8 (346)	13 5/8 (346)	53 (24)	58 (26)	68 (31)	67 (30)	74 (34)
2 (51)	7 1/2 (191)	8 1/2 (216)	9 (229)	11 1/8 (283)	5 1/4 (133)	5 (127)	5 5/8 (143)	16 1/4 (413)	16 1/4 (413)	84 (38)	90 (41)	97 (44)	113 (51)	120 (55)
2 1/2 (64)	-- --	9 3/8 (238)	10 (254)	11 1/8 (283)	5 3/4 (146)	5 3/8 (137)	6 (152)	16 1/2 (419)	16 1/2 (419)	-- --	97 (44)	112 (51)	130 (59)	135 (61)
3 (76)	-- --	10 (254)	10 3/8 (273)	13 1/2 (343)	6 5/8 (168)	5 3/8 (162)	7 (178)	19 1/4 (489)	19 1/4 (489)	-- --	148 (67)	170 (77)	210 (95)	226 (103)
4 (102)	-- --	11 7/8 (302)	12 1/2 (318)	13 1/2 (343)	7 5/8 (194)	6 5/8 (168)	8 (203)	18 3/8 (467)	233/8 (594)	-- --	208 (95)	293 (133)	307 (139)	330 (150)
5 (127)	-- --	13 5/8 (346)	14 1/2 (368)	13 1/2 (343)	8 1/2 (216)	7 3/8 (187)	8 3/4 (222)	18 3/4 (476)	233/4 (603)	-- --	240 (109)	333 (151)	335 (152)	366 (166)
6 (152)	-- --	15 1/8 (384)	16 (406)	16 3/4 (425)	10 (254)	7 (178)	-- --	23 1/2 (597)	273/8 (695)	-- --	348 (158)	616 (280)	560 (254)	503 (274)
8 (203)	-- --	19 (483)	20 (508)	16 3/4 (425)	11 1/2 (292)	9 1/4 (235)	-- --	23 3/4 (603)	295/8 (752)	-- --	650 (295)	814 (370)	795 (361)	862 (392)
10 (254)	-- --	23 5/8 (600)	25 (635)	20 (508)	13 3/4 (349)	-- --	-- --	30 3/4 (781)	35 3/8 (899)	-- --	910 (414)	1130 (513)	1345 (611)	1420 (645)
12 (305)	-- --	26 1/2 (673)	28 (711)	24 3/4 (629)	15 7/8 (403)	-- --	-- --	39 3/4 (1010)	39 3/4 (1010)	-- --	1580 (718)	1920 (872)	1990 (904)	2160 (982)

*Add 150% to D dimension for stem removal clearance.

TYPE E6 MAIN VALVE

HIGH PRESSURE-HIGH LIFT

COLD SERVICE

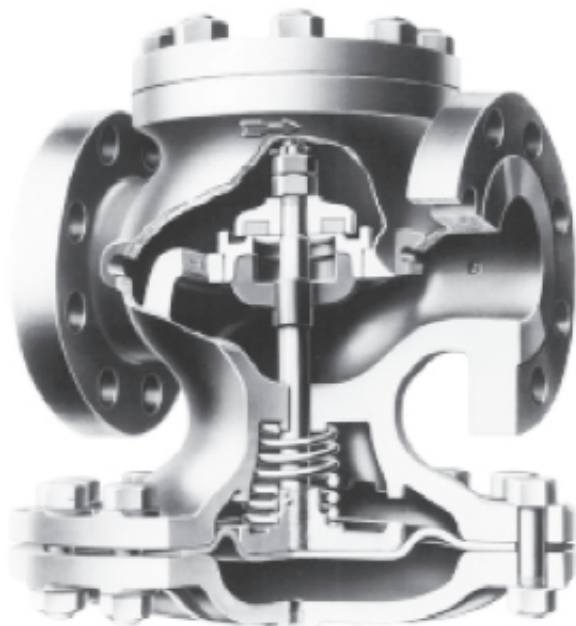

TYPE E6 MAIN VALVE

SIZING INFO PAGE 114

**SIZE 3/4 " - 12" -
PRESSURES TO 250 PSIG AT 200°F**

- Normally Closed
- Single Seat
- Balanced Nitrile Diaphragm
- Protected Main Spring
- Composition Disc for Tight Shutoff
it Air & Gas Applications
- Accurate Regulation Unaffected by
Service Conditions
- ANSI/FCI 70-2 Class VI Shutoff
- Virtually Frictionless for Long Service Life
- Packless Construction
- Easy In-line Maintenance
- Wide Variety of Pilots for Many Applications

APPLICATION DATA

- Pressure Regulating for Compressed
Air Distribution
- Pressure Regulating for Gas Service
- Maintain Back Pressure or Differential Pressure
- For use with Self-contained, Pneumatic
or Electronic Pilots
- Single Point or Multiple Use Applications
- Slow Start-up or Shutdown

VALVE RATINGS

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)
CAST IRON		
B16.4 Class 250 NPT	250 (17.2) @	200 (93)
B16.1 Class 125 Flanged	125 (8.6) @	200 (93)

Other pressure/temperature rating available; consult factory.

Canadian Registration # OC 0591.9C

OPTIONS

- Dashpot for Water Service • Integral Mount Pilot
- Insulcap Insulating Jacket • Balanced Construction
- EZ Connections

TYPICAL CONFIGURATIONS

PRESSURE REDUCING.....	TYPE E6D
AIR ADJUSTED.....	TYPE E6A
BACK PRESSURE.....	TYPE E6Q
PUMP GOVERNOR	TYPE E6P
LOAD ALLOCATING.....	TYPE E6FD
AIR CONTROLLING.....	TYPE E6AP60
ELECTRONIC SLOW START.....	TYPE E6D208D
SOLENOID CONTROLLED.....	TYPE E6MD
SOLENOID ACTUATED.....	TYPE E6M
DIFFERENTIAL.....	TYPE E6N
TEMPERATURE CONTROL.....	TYPE E6T

RATED FLOW COEFFICIENTS (Cv)

SEAT FACTOR	REGULATOR SIZE												
	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12
Full	7.6	11.7	18.9	27.4	43	67	95	159	258	350	665	1018	1611
Normal	5.7	10.0	13.4	19.8	25	35	59	120	176	228	366	525	952

*When installed according to factory specifications.


TYPE E6 MAIN VALVE

SPECIFICATION

The valve shall be self-operated, external pilot type, single seated, composition disc, Nitrile diaphragm actuated, normally closed design. The valve will function quickly and shut tight on dead end service. Seats and stems shall be of stainless steel. There shall be no springs in the flow space and no stuffing box. The valve shall be easy to maintain with all parts accessible without removal from the line.

MATERIALS OF CONSTRUCTION

Body, Cast Iron ASTM A 126 Cl. B
 Stem 303 St. Stl. ASTM A582
 Disc Nitrile Comp
 Seat 3/4 - 5" 420 St. Stl. ASTM A473 CA-40
 Seat 6 - 8" 316 St. Stl. ASTM A743 CF-8M
 Gasket Non-asbestos
 Diaphragm Nitrile
 Spring Steel
 Disc Holder ASTM B16 UNS C36000

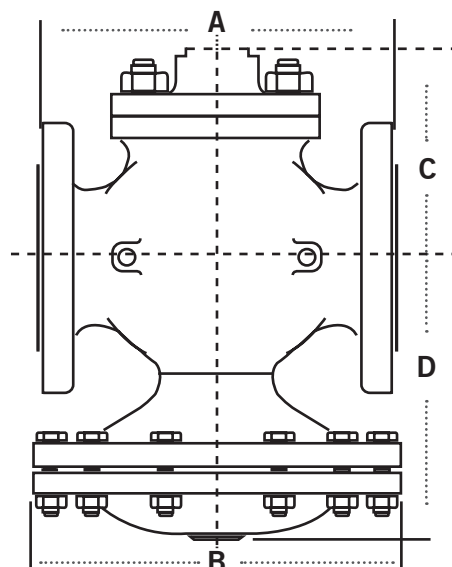

TYPE E6 MAIN VALVE

FITTINGS ON PAGE 50


DIMENSIONS inches(mm) AND WEIGHTS POUNDS (kg)

SIZE	DIMENSIONS							APPROX. WT		
	A			B	C		D*	ANSI NPT	ANSI 125	ANSI 250
	ANSI NPT	ANSI 125	ANSI 250		Std. Mount	Integral Mount				
3/4 (19)	4 3/4 (111)	--	--	6 7/8 (175)	2 7/8 (73)	3 5/8 (92)	6 3/8 (162)	18 (8)	--	--
1 (25)	5 3/8 (137)	5 1/2 (140)	6 (152)	6 7/8 (175)	3 5/8 (92)	4 3/8 (111)	6 5/8 (168)	18 (8)	27 (129)	30 (14)
1 1/4 (32)	6 1/2 (165)	6 3/4 (171)	7 1/4 (184)	9 1/8 (232)	4 1/8 (105)	4 (102)	7 3/4 (197)	37 (17)	39 (18)	44 (20)
1 1/2 (38)	7 1/4 (184)	6 7/8 (175)	7 3/8 (187)	9 1/8 (232)	4 3/8 (111)	4 1/2 (114)	7 7/8 (200)	42 (19)	50 (23)	56 (25)
2 (51)	7 1/2 (191)	8 1/2 (216)	9 (229)	11 1/8 (283)	5 1/4 (133)	5 (127)	8 5/8 (219)	66 (30)	73 (33)	81 (37)
2 1/2 (64)	--	9 3/8 (238)	10 (254)	11 1/8 (283)	5 3/4 (146)	5 3/8 (137)	9 (229)	--	83 (38)	95 (43)
3 (76)	--	10 (254)	10 3/8 (273)	13 1/2 (343)	6 5/8 (168)	5 3/8 (162)	9 7/8 (178)	--	124 (56)	146 (66)
4 (102)	--	11 7/8 (302)	12 1/2 (318)	13 1/2 (343)	7 5/8 (194)	6 5/8 (168)	12 3/4 (324)	--	206 (94)	234 (106)
5 (127)	--	13 5/8 (346)	14 1/2 (368)	13 1/2 (343)	8 1/2 (216)	7 3/8 (187)	13 1/4 (337)	--	275 (125)	287 (130)
6 (152)	--	15 1/8 (384)	16 (406)	16 3/4 (425)	10 (254)	7 (178)	15 1/2 (394)	--	363 (165)	431 (196)
8 (203)	--	19 (483)	20 (508)	16 3/4 (425)	11 1/2 (292)	9 1/4 (235)	17 5/8 (448)	--	508 (231)	610 (277)

*Add 100% to D dimension for stem removal clearance.

TYPE E8 MAIN VALVE

AIR LOADED

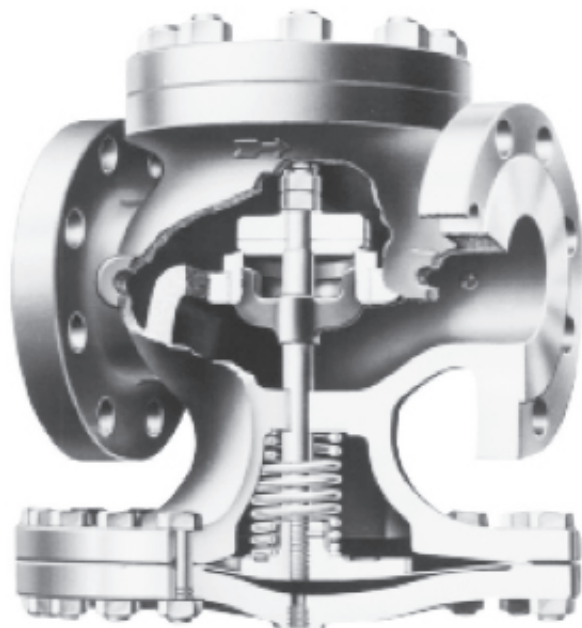

TYPE E8 MAIN VALVE

SIZING INFO PAGE 114

VALVE RATINGS

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)
CAST IRON		
Class 250 NPT	250 (17.2) @	450 (232)
B16.1 Class 125 Flanged	125 (8.6) @	450 (232)
B16.1 Class 250 Flanged	250 (17.6) @	450 (232)

Canadian Registration # OC 0591.9C

SIZE 3/8 " - 12" - PRESSURES TO 250 PSIG AT 406°F

- Normally Closed
- Single Seat
- Balanced Metal Diaphragms
- ANSI/FCI 70-2 Class IV Shutoff
- No Minimum Operating Differential Pressure
- Packless Construction
- No Pilot Needed
- Maximum 50 PSI Air Delivery Pressure
- Permits Remote Operation and Control
- Economical Alternative to Control Valve

APPLICATION DATA

- Pressure Regulating for Steam Distribution
- Regulating for Process Control (Temperature or Pressure)
- Maintain Back Pressure or Differential Pressure
- To use Air Load Pressure to Control Delivery Pressure
- Single Point or Multiple Use Applications
- Slow Start-up or Shutdown
- Use where "Dirty Steam" Conditions Exist

OPTIONS

- Composition Disc
- Parabolic Disc
- Balanced Construction
- Dash pot
- Insulcap Insulating Jacket
- EZ Connections

TYPICAL CONFIGURATIONS

PRESSURE REDUCING	TYPE E8 65A
PRESSURE REDUCING	TYPE E8 A PANEL
PRESSURE REDUCING	TYPE E8 B PANEL
PRESSURE REDUCING	TYPE E8EPC
TEMPERATURE CONTROL	TYPE E8T61
TEMPERATURE CONTROL	TYPE E8EPC

RATED FLOW COEFFICIENTS (Cv)

SEAT FACTOR	REGULATOR SIZE														
	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12
FULL	1.5	2.8	5.4	8.8	14.1	19.8	31	44	74	109	169	248	444	706	1113
FULL75%	-	2.2	4.2	7.2	11.1	15.9	22.9	37	56	88	136	188	353	558	880
FULL 50%	-	1.7	2.6	6.3	7.4	11.3	17.7	25	42	65	94	139	252	400	631
NORMAL	.66	1.55	4.8	7.5	10.4	14.6	17.6	24	43	78	115	151	249	377	631
NORMAL 75%	-	-	-	-	-	-	-	18	34	62	89	110	187	294	463
NORMAL 50%	-	-	-	-	-	-	-	14	26	46	65	83	139	230	363


TYPE E8 MAIN VALVE

SPECIFICATION

The valve shall be air operated, single seated, metal diaphragm actuated, normally closed design. The valve will function quickly and shut tight on dead end service. Internal parts including seats, discs, stems and diaphragms shall be of stainless steel. There shall be no springs in the steam space and no stuffing box. The valve shall be easy to maintain with all parts accessible without removal from the line.

MATERIALS OF CONSTRUCTION

Body, Cast Iron ASTM A126 Cl. B
 Stem 303 St. Stl. ASTM A582
 Disc 3/4 - 5" 420 St. Stl. ASTM A743 CA-40
 Disc 6 - 12" 304 St. Stl. ASTM A167/A240
 Seat 3/4 - 5" 420 St. Stl. ASTM A743 CA-40
 Seat 6 - 12" 316 St. Stl. ASTM A743-79 CF-8M
 Gasket Non-asbestos
 Diaphragm Stainless Steel MIL-S-5059C
 Spring Steel

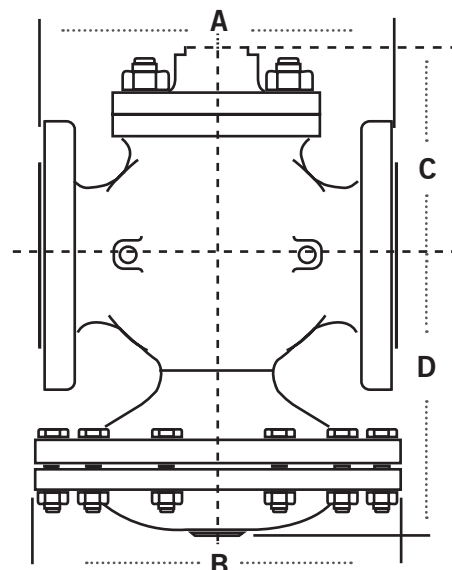

TYPE E MAIN VALVE

FITTINGS ON PAGE 50


DIMENSIONS inches(mm) AND WEIGHTS POUNDS (kg)

SIZE	FACE TO FACE DIMENSIONS					OTHER DIMENSIONS					APPROX. WT.					
	A					B	C		D	E	ANSI NPT	ANSI 125	ANSI 150	ANSI 250	ANSI 300	ANSI 600
	ANSI NPT	ANSI 125, 150	ANSI 250	ANSI 300	ANSI 600			ANSI 600								
3/4 (10)	4 3/4 (111)	--	--	--	--	5 7/8 (149)	2 3/8 (70)	--	5 1/4 (133)	7 3/8 (187)	14 (31)	--	--	--	--	--
1/2 (12)	4 3/8 (111)	--	--	--	6 (162)	5 7/8 (149)	2 3/4 (70)	2 3/4 (70)	5 1/4 (133)	7 3/8 (187)	14 (31)	--	--	--	--	20 (44)
3/4 (19)	4 3/8 (111)	--	--	--	6 3/8 (162)	6 1/2 (162)	2 7/8 (73)	3 7/8 (98)	5 1/2 (140)	7 7/8 (200)	18 (40)	--	--	--	--	28 (62)
1 (25)	5 3/8 (137)	5 1/2 (140)	6 (152)	6 1/2 (165)	6 1/2 (165)	7 (178)	3 5/8 (92)	4 1/4 (108)	6 1/4 (159)	8 7/8 (225)	23 (51)	24 (53)	26 (57)	27 (59)	31 (68)	32 (70)
1 1/4 (32)	6 1/2 (165)	6 3/4 (171)	7 1/4 (184)	7 7/8 (200)	7 7/8 (200)	7 7/8 (200)	4 1/8 (105)	4 5/8 (117)	6 1/2 (165)	9 1/8 (232)	33 (73)	36 (79)	37 (81)	40 (88)	41 (90)	45 (99)
1 1/2 (38)	7 1/4 (184)	6 7/8 (175)	7 3/8 (187)	8 (203)	8 (203)	8 3/4 (222)	4 3/8 (111)	5 1/8 (130)	7 1/8 (181)	9 3/4 (248)	43 (95)	45 (99)	47 (103)	51 (112)	55 (121)	58 (128)
2 (51)	7 1/2 (191)	8 1/2 (216)	9 (229)	10 1/4 (260)	10 1/4 (260)	9 7/8 (251)	5 1/4 (133)	5 3/4 (146)	7 5/8 (194)	11 1/4 (286)	62 (136)	67 (147)	73 (161)	72 (158)	78 (172)	83 (183)
2 1/2 (64)	--	9 3/8 (238)	10 (254)	11 1/4 (286)	11 1/4 (286)	10 7/8 (276)	5 3/4 (146)	7 7/8 (200)	8 3/8 (213)	12 1/8 (308)	--	82 (180)	95 (209)	100 (220)	100 (220)	130 (286)
3 (76)	--	10 (254)	10 3/4 (273)	12 1/4 (311)	12 1/4 (311)	11 3/4 (298)	6 5/8 (168)	9 1/8 (232)	9 1/4 (235)	14 5/8 (371)	--	110 (242)	125 (275)	130 (286)	140 (308)	175 (385)
4 (102)	--	11 7/8 (302)	12 1/2 (318)	12 1/2 (318)	14 1/2 (368)	14 3/4 (375)	7 5/8 (194)	10 5/8 (270)	11 7/8 (302)	18 1/4 (464)	--	200 (440)	210 (462)	235 (517)	230 (506)	310 (682)
5 (127)	--	13 5/8 (346)	14 1/2 (368)	14 1/2 (368)	16 1/2 (419)	16 7/8 (429)	8 1/2 (216)	12 1/2 (318)	12 1/2 (318)	20 1/8 (511)	--	280 (616)	295 (649)	315 (693)	310 (682)	490 (1078)
6 (152)	--	15 1/8 (384)	16 (406)	16 (406)	17 3/8 (441)	19 3/4 (502)	10 (254)	13 3/4 (349)	14 1/8 (359)	22 3/8 (568)	--	385 (847)	420 (924)	455 (1001)	470 (1034)	655 (1441)
8 (203)	--	19 (483)	20 (508)	20 (508)	21 5/8 (549)	22 1/2 (572)	11 1/2 (292)	15 3/8 (391)	17 1/4 (438)	27 3/4 (705)	--	657 (1445)	700 (1540)	735 (1617)	710 (1562)	1070 (2354)
10 (254)	--	23 5/8 (600)	25 (635)	25 (635)	--	28 (711)	13 3/4 (349)	--	23 3/8 (594)	36 1/4 (921)	--	1260 (2772)	1240 (2728)	1430 (3146)	1300 (2860)	--
12 (305)	--	26 1/2 (673)	28 (711)	28 (711)	--	33 (838)	15 7/8 (403)	--	25 1/4 (641)	41 1/2 (1054)	--	2070 (4554)	2060 (4532)	2145 (4719)	2140 (4708)	--

TYPE C34 MAIN VALVE

BALANCED SINGLE SEAT

LIQUID SERVICE

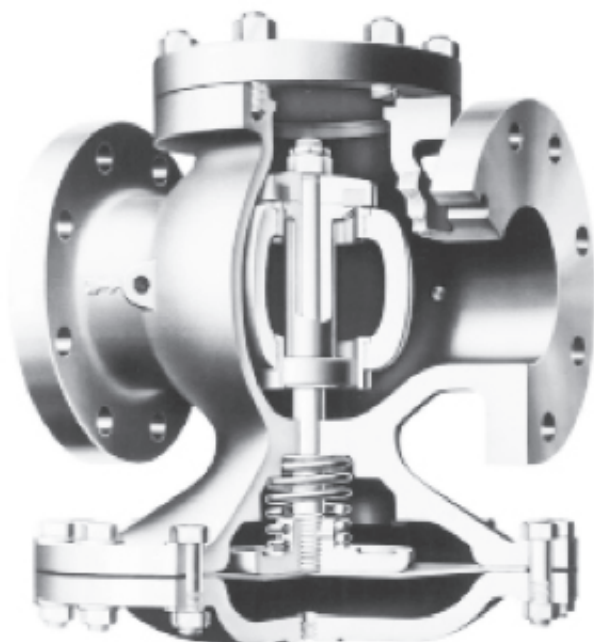

TYPE C34 MAIN VALVE

SIZING INFO PAGE 114

VALVE RATINGS

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)
CAST IRON		
B16.4 Class 250 NPT	250 (13.8) @	200 (93)
B16.1 Class 125 Flanged	125 (11.4) @	200 (93)
B16.1 Class 250 Flanged	250 (13.8) @	200 (93)

Canadian Registration # OC 0591.9C

SIZE 1 " - 5" -
PRESSURES TO 250 PSIG AT 200°F

- Normally Closed
- Single Seat
- Nitrile Diaphragm
- Balanced Composition Disc
- Protected Main Spring
- Balanced Piston Design without Dashpot
- Fluid Applications
- Accurate Regulation for Non-violent Load Fluctuations
- ANSI/FCI 70-2 Class VI Shutoff
- Virtually Frictionless for Long Service Life
- Packless Construction
- Wide Variety of Pilots for Many Applications

APPLICATION DATA

- Pressure Regulating for Liquid Distribution
- Regulating for Process Control (Temperature or Pressure)
- Maintain Back Pressure or Differential Pressure
- For use with Self-contained, Pneumatic or Electronic Pilots
- Single Point or Multiple Use Applications
- Slow Start-up or Shutdown

OPTIONS

- EZ Connections

TYPICAL CONFIGURATIONS

PRESSURE REDUCING	TYPE C34D
AIR ADJUSTED	TYPE C34A
BACK PRESSURE	TYPE C34Q
PUMP GOVERNOR	TYPE C34P
LOAD ALLOCATING	TYPE C34FD
AIR CONTROLLED	TYPE C34AP60
ELECTRONIC SLOW START	TYPE C34D208D
SOLENOID CONTROLLED	TYPE C34MD
SOLENOID ACTUATED	TYPE C34M
DIFFERENTIAL	TYPE C34N
COOLING CONTROL	TYPE C34T

RATED FLOW COEFFICIENTS (Cv)

REGULATOR SIZE								
1	1 1/4	1 1/2	2	2 1/2	3	4	5	6
5.5	12.5	17.3	24	36	53	86	139	196


TYPE C34 MAIN VALVE

SPECIFICATION

The valve shall be self-operated, external pilot type, single seated, diaphragm actuated, normally closed design. The valve will shut tight on dead end service and shall maintain a discharge pressure which will not vary more than 10% (2 psi minimum) of set point from zero flow to rated flow regardless of inlet pressure variation. Valve shall be suitable for 200°F (93°C) service temperature. Bodies shall be cast iron. Sizes 2-1/2" and larger shall have flanged ends. Trim shall be stainless steel. Valves shall be equipped with a reversible composition disc. Diaphragms and discs shall be Nitrile. There shall be no springs in the fluid space and no stuffing box.

MATERIALS OF CONSTRUCTION

Body, Cast Iron ASTM A 126 Cl. B
 Stem 303 St. Stl. ASTM A582
 Disc Nitrile Comp
 Seat 1 - 2" 303 St. Stl. ASTM A582
 Seat 2 1/2 - 6" 304 St. Stl. ASTM A276 Cond A
 Gasket Non-asbestos
 Diaphragm Nitrile
 Spring Steel

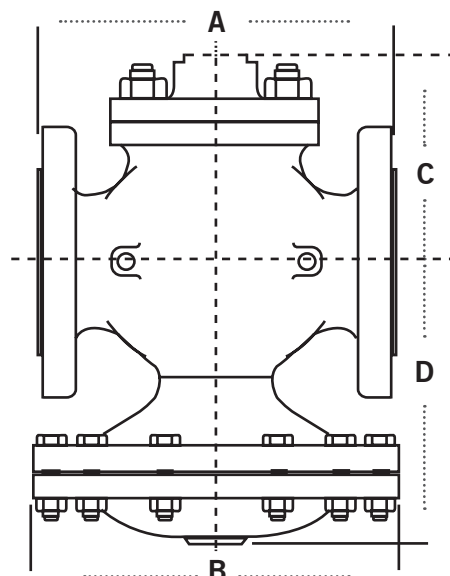

TYPE C34 MAIN VALVE

FITTINGS ON PAGE 50

DIMENSIONS inches(mm) AND WEIGHTS POUNDS (kg)

SIZE	FACE TO FACE			OTHER DIMENSIONS						APPROX. WT.		
	A			B	C	D	E	F	G	ANSI NPT	ANSI 125	ANSI 250
	ANSI NPT	ANSI 125	ANSI 250									
1 (25)	5 3/8 (137)	--	--	6 7/8 (175)	3 3/8 (86)	7 (178)	1 3/8 (35)	6 (152)	10 3/8 (264)	19 (9)	--	--
1 1/4 (32)	6 1/2 (165)	--	--	6 7/8 (175)	3 7/8 (98)	7 (178)	11 3/16 (46)	6 5/8 (168)	11 1/4 (286)	24 (11)	--	--
1 1/2 (38)	7 1/4 (184)	--	--	6 7/8 (175)	4 1/4 (108)	7 (178)	1 15/16 (49)	6 3/8 (162)	11 7/8 (302)	29 (13)	--	--
2 (51)	7 1/2 (191)	8 1/2 (216)	9 (229)	9 1/8 (232)	4 1/2 (114)	7 (178)	2 1/16 (52)	6 1/2 (165)	12 1/2 (318)	46 (21)	51 (13)	60 (27)
2 1/2 (64)	--	9 3/8 (238)	10 (254)	9 1/8 (232)	5 1/2 (140)	7 3/8 (187)	2 3/8 (60)	6 7/8 (175)	14 1/2 (368)	--	65 (30)	74 (34)
3 (76)	--	10 (254)	10 3/4 (273)	11 1/8 (283)	6 (152)	8 3/4 (222)	2 3/4 (70)	7 1/4 (184)	15 7/8 (403)	--	94 (43)	111 (50)
4 (102)	--	11 7/8 (302)	12 1/2 (318)	13 1/2 (343)	6 5/8 (168)	9 3/8 (238)	3 (76)	7 3/4 (197)	17 3/4 (451)	--	148 (67)	172 (78)
5 (127)	--	13 5/8 (346)	14 1/2 (368)	13 1/2 (343)	7 5/8 (194)	10 7/8 (276)	3 1/2 (89)	8 5/8 (219)	20 1/4 (514)	--	194 (88)	226 (103)
6 (152)	--	15 1/8 (384)	16 (406)	13 1/2 (343)	9 1/8 (232)	13 1/8 (333)	4 1/4 (108)	10 5/8 (270)	25 1/8 (638)	--	280 (127)	325 (148)

This image shows a full page of a document template. It consists of approximately 28 horizontal dotted lines spaced evenly down the page, providing a guide for handwriting or typing. The background is plain white, and there are no margins, headers, or footers visible.

MAIN VALVE ACCESSORIES

MAIN VALVE OPTIONS



BALANCED CONSTRUCTION

There are installations where it is desirable to not have the inlet pressure forcing down on the Main Valve Disc. In these instances, the E Main Valve should be internally balanced. The balance parts allow the down-stream pressure to rest on top of the disc, thus allowing for finer adjustments in the Main Valve travel and a smoother operating regulator. The balance cylinder is suitable for 550° F max temperatures.



SECOWELD

The greatest weakness in a High Pressure Valve is the threaded joint between the Seat Ring and the body. A slight leak developing at this point will gradually erode the Body metal, thus accentuating the leak and eventually ruining the body. Various impractical schemes, such as welding the Seat Ring into the Body, have been tried to overcome this weakness. The invention SECOWELD solves this problem and, at the same time, provides an easily renewable Seat Ring. In the SECOWELD Design, a SECO Metal Bushing is welded to and thus sealed in the Body and, in turn, is threaded to take the Main Seat Ring, which is also of SECO Metal. As SECO Metal resists wiredrawing, if slight leakage should occur, no damage can be done to the body or to the threads of either SECO Metal piece.



EZ CONNECTIONS

Provides the performance of a flanged connection with the simplicity of a union connection. Unlike conventional unions, EZ Connections do not require matched sets or springing pipe to clear cone tolerances and do not leak after just a few disassembly/reassembly cycles. Uniform end to end dimensions simplify rough-in schematics. Available on 1/2" through 2" threaded main valves in NPT, socketweld and threaded by socketweld connections.

Consult Factory for pricing and availability.



CONDENSATION CHAMBER

A Condensation Chamber is standard on the Type E5 Main Valve. A Condensation Chamber is standard on the Type E Main Valve when steam temperatures exceed 600°F. Any Main Valve discharging steam into a vacuum should include a Condensation Chamber.

MAIN VALVE OPTIONS



LOW DIFFERENTIAL PRESSURE (LP) MAIN SPRING

The E Series Main Valves provide superior regulation in a broad range of applications by utilizing a specialized Main Spring. When differential pressures between 10-50 psi are desired, E Main Valves should be equipped with the optional LP Main Spring. The LP Main Spring alone will achieve differential pressures to 15 psi. In order to attain differential pressures to 10 psi, optional 5B Open Elbow and 1/16" 4A Bleed Port are required.




COMPOSITION DISC

In a Single Seat Main Valve, the Integral (all-metal) Disc is interchangeable with the Composition Disc Assembly. The Composition Disc is recommended for service on air, gas and water where absolutely tight shutoff is required and is available on Full and Normal seats and Parabolic valve plugs. The Composition Disc is suitable for pressures to 200 psi and temperatures to 200°F.



PARABOLIC DISC

In order to meet special flow requirements, any Spence Main Valve can be equipped with a Parabolic or other specially shaped Disc. Due to the fact that the Spence Main Valve is operated by a large, balanced Diaphragm and is nearly frictionless in operation, special Discs are not required on normal installations.



DASHPOT

In order to prevent water hammer, Dashpots are required in all single seat, normally closed Main Valves used on liquid service, except Type C34. Dashpots are neither necessary nor desirable on steam, air or gas service and are not required in double seat valves or in normally open single seat valves. Illustration shows Dashpot and Composition Disc for initial pressures of 200 psig and less. For initial pressures greater than 200 psig, standard metal to metal seat and disc are used.

INSULCAP SERIES

THERMAL & ACOUSTIC BLANKET INSULATION



INSULCAP JACKET

Temperatures to 450°F (260°C)
Average Sound Reduction of 6 dBa

- **Real Return on Investment** - 93% reduction in thermal losses over bare metal. ROI calculations available!
- **1 1/2" Thick Insulation** - Custom designs available!
- **CAD Designed and CNC Produced** - Ensures exact fit and quality coverage.
- **Thermal or Acoustic Design** - Realize up to \$1200 per year in energy savings; optional acoustic barrier provides reduction of harmful radiant noise.
- **Integral Fastener Hardware** - Flexible and easy to install, remove and reinstall.
- **Riveted Nameplate** - Ideal for large projects or sensitive industries, blankets are traceable and certifiable.

MATERIALS OF CONSTRUCTION

Core Filler ASTM C 1086-88
 Jacketing Material PTFE Coated Fiberglass Composite
 Sound Reflector ASTM E 90-90

SPECIFICATION

Blanket insulation shall be 1 1/2" thick, of 16.5 oz/yd² impregnated fiberglass cloth and mat design, with double sewn lock stitched seams, 7 stitches per inch minimum. Acoustic design shall use a barium sulfate sound reflector material, and shall be rated using ASTM E1222-87. Extended fabric flaps shall be included for overlapping of pipe insulation. Nameplate shall be of permanent design, showing location, description, size, pressure rating and sequential tag number. Fasteners shall be stainless steel, permanently affixed, and properly aligned for multiple removals and installations. Blankets shall have a stainless steel drain grommet or mating seam at lowest installed point for drainage and leak detection. Quilting pins, secured with stainless steel speed washers, shall be incorporated into the blanket at random, no greater than 18" apart.

TYPES A & B PANELS




TYPE B PANEL

OPTIONS

- HIGH DELIVERY PRESSURE

MODELS

- **MODEL A AIR ADJUSTMENT PANEL** includes an air adjusting valve incorporating its own bleed and two gages; one for the supply air, the other to indicate the adjusting air. It comes complete and ready to be mounted directly on a control board or box.
- **MODEL B AIR ADJUSTMENT PANEL** is the same as the Model A with the exception that it has, in addition, a gage indicating the delivery pressure.

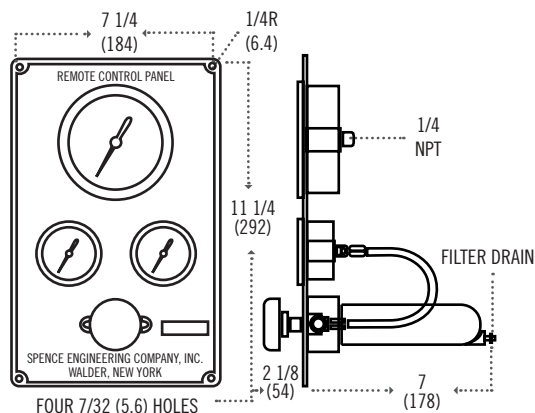

TYPE B PANEL cutout 10 1/4 (266) high by 6 (152) wide

- Gauges indicate Air Loading, Air Supply and / or Delivery Pressures
- Integral Filter Conditions Dirty Shop Air
- 50 PSI Delivery Pressure
- Accurate Delivery Pressure over Wide Range of Flow

APPLICATION DATA

- To display Air Loading, Air Supply and/or Delivery Pressure
- To Remotely Adjust Air Pilots
- To Reduce Plant Air Pressure to Instrument Air Pressure for Signaling Regulators and Control Valves
- To Filter Plant Air to Instrument Air Quality


TYPICAL CONFIGURATIONS

For use with:

- EA
- E8
- Positioners
- EPC
- Any Controller Requiring Conditioned Pneumatic Signal

SPECIFICATION

Air Adjustment Panel shall provide remote control for air actuated regulators and control valves. It shall convert plant air to instrument quality air and provide 0 to 50 psi delivery pressure. The Panel shall have a flow capacity of 22 SCFM. Panel shall have gauges indicating air load pressure and air supply pressure with option of process delivery pressure gauge.

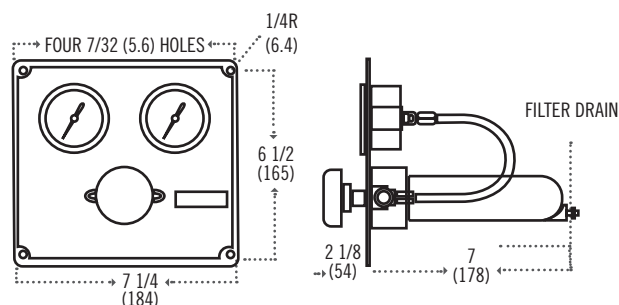

TYPE A PANEL cutout 5 1/4 (133) high by 6 (152) wide

AUXILIARY FITTINGS

BLEED PORTS


For steam, air and gas service, a 3/32" bleed port orifice is used for main valve sizes up to 8". For 10" and 12" main valve sizes, a 1/8" bleed port orifice is used. If the initial pressure or pressure drop is less than 15 psig, the orifice is reduced to 1/16". For liquids: fuel oil utilizes a 3/32" bleed port and all other fluids utilize a 1/16" bleed port regardless of pressure conditions. For main valve sizes up to 8" on long pressure drops, the orifice is sometimes increased to 1/8" to eliminate hunting or to make the valve close faster and open slower.



4A BLEED PORT



1A UNION BLEED PORT



8A BLEED PORT TEE

MAIN VALVE SIZE	OFFICE DRILL SIZE	DECIMAL EQUIVALENT
3/8	60	.0400
1/2	60	.0400
3/4	60	.0400
1	60	.0400
1 1/4	58	.0420
1 1/2	58	.0420
2	56	.0465
2 1/2	56	.0465
3	53	.0595
4	51	.0670
5	47	.0785
6	45	.0820
8	42	.0935
10	17	.1730
12	7	.2010

* Steam, Air & Gas.


If the initial pressure or pressure drop is less than 15 psi, a No. 5A elbow with orifice removed is used

RESTRICTIONS


Spare restriction fittings can be supplied blank and drilled for a particular main valve according to the table. If the initial pressure or pressure drop is less than 15 psi, an open fitting is used. All back pressure valves employ an open fitting. For liquid services (except back pressure) the restriction orifice is 1/16" for all sizes of main valves.



5A RESTRICTION ELBOW




7A SAFETY PILOT RESTRICTION TEE

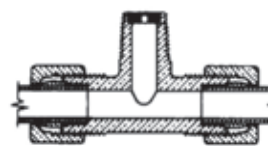


7C ANTI-FREEZE RESTRICTION TEE


OPEN FITTINGS




8B TEE




5B ELBOW

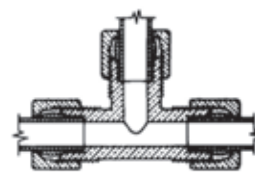


9B TUBING TEE



4B COUPLING

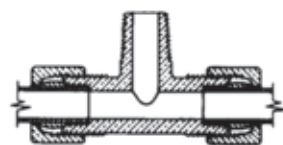

7B TEE




1B UNION

PILOTS

TYPE D SERIES PILOTS

PRESSURE REDUCING PILOTS

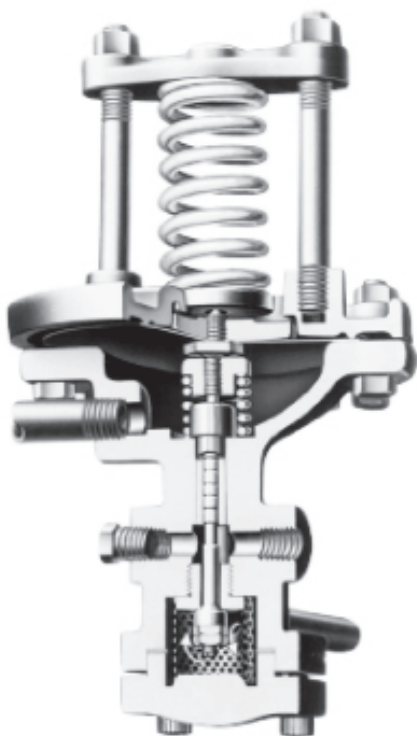

TYPE D PRESSURE PILOT

SIZING INFO PAGE 120

SPRING PRESSURE RANGE (PSIG).....

TYPE D	TYPE D2	TYPE D5	TYPE D120
3-20*	100-300	1-10	5-25
5-50*		5-25	10-75
10-100			40-150
20-150			100-300

*With Vacuum Spring Assembly, minimum range is 30 inches Hg; maximum is reduced by 15 PSIG.

Canadian Registration # OC 0591.9C

TYPICAL CONFIGURATIONS.....

PRESSURE REDUCING	TYPE ED
PRESSURE REDUCING	TYPE E2D
PRESSURE REDUCING	TYPE E5D
PRESSURE REDUCING	TYPE E6D
WATER PRESSURE REDUCING	TYPE C34D
TEMPERATURE & PRESSURE	TYPE ET14D

CONTROLS 3 to 300 PSIG

- Self Contained
- Spring Operated
- Normally Closed
- Packless Construction
- Fluid, Gas & Vapor Applications
- Accurate Regulation Unaffected by Service Conditions
- Easy In-line Maintenance

MODELS

- **TYPE D** for ± 1 psi control of delivery pressures between 3 and 150 psi.
- **TYPE D2** for control of delivery pressures between 100 and 300 psi.
- **TYPE D5** for $\pm 1/2$ psi control of delivery pressures between 1 and 25 psi.
- **TYPE D120** for exceptionally fast response controlling delivery pressures between 5 and 300 psi. To be used on large E main valves.

APPLICATION DATA

- Pressure Regulating for Steam Distribution
- Regulating for Process Control
- Can be used with Temperature Pilot to Regulate Pressure on Temperature Control Application

OPTIONS

- Spring Chamber
- Adjusting Handwheel
- Composition Disc
- Integral Mount Body
- Vacuum Spring Assembly

RATING (Maximum Inlet Conditions)

Construction	Pressure PSIG (bar)	Temperature °F (°C)
--------------	------------------------	------------------------

CAST IRON

Class Iron	250(17.2)@	450 (232)
Class Steel	600(41.4)@	750 (400)

TYPE D SERIES PILOTS


PRESSURE REDUCING PILOTS

SPECIFICATION


The Pilot shall be separate from the main valve and connected to it with a male union. The Pilot shall be normally closed design with packless construction. A strainer screen shall be built into the Pilot inlet. The Pilot shall be interchangeable on all sizes of main valves.

MATERIALS OF CONSTRUCTION


Body, Cast Iron	ASTM A 126 Cl. B
Body, Cast Steel	ASTM A216 GR. WCB
Stem	303 St. Stl. ASTM A582 COND A
Disc	440 St. Stl. ASTM A276-75 COND A
Seat	420 St. Stl. ASTM A276 COND A
Gasket	Non-Asbestos
Diaphragm	301 St. Stl. MIL-5-5059C
Spring	Inconel

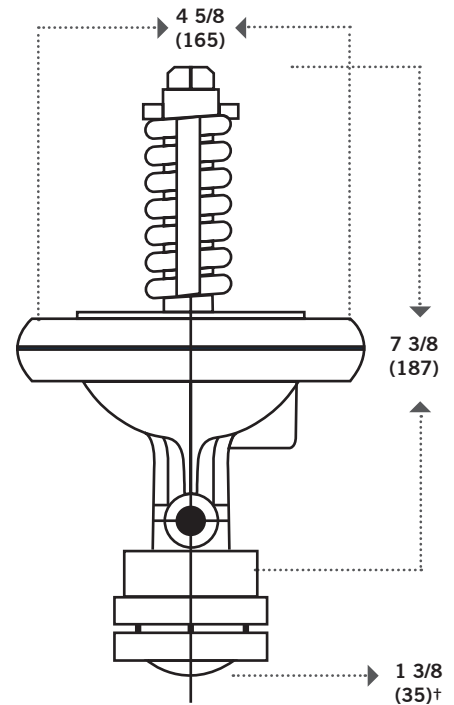


STANDARD D PILOT
7 LBS. (3.2 KG)

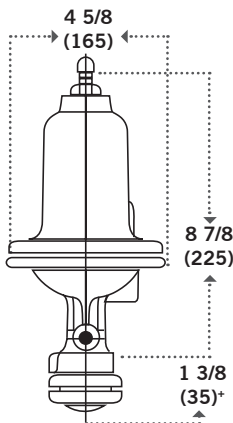


SPRING CHAMBER
8 LBS. (3.6 KG)

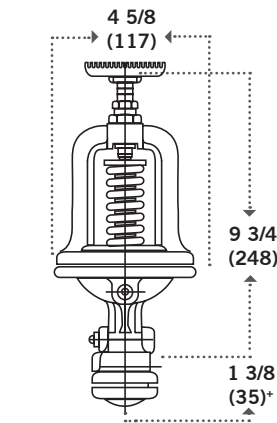


D ADJUSTING HANDWHEEL
9 LBS. (4.1 KG)




TYPE D5 14 LBS.
(6.4 KG)

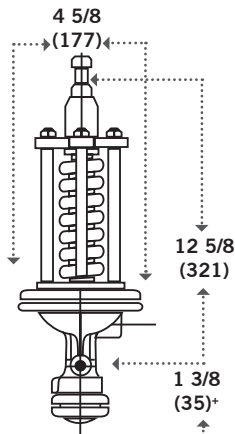

TYPE D2 10 LBS.
(4.5 KG)

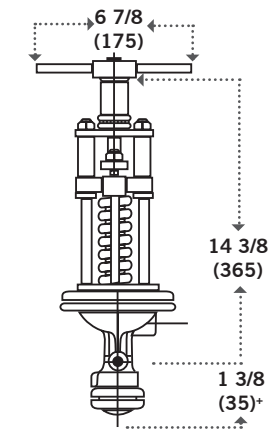

D ADJUSTING HANDWHEEL
12 LBS. (5.4 KG)

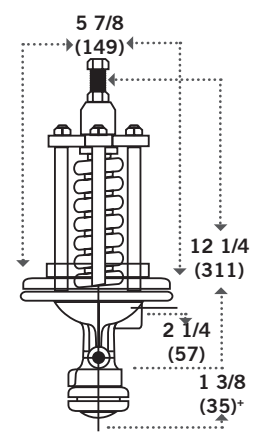


TYPE D120 16 LBS.
(7.3 KG)


+ For Integral Mount Pilot, this dimension is 5/8" (16).

TYPE A SERIES PILOTS

AIR ADJUSTED PILOTS

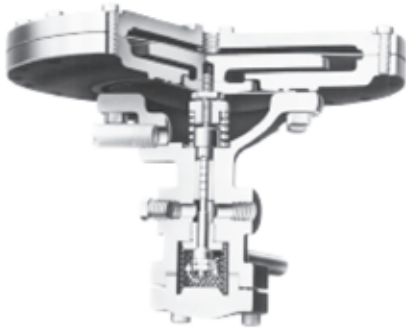

TYPE A73 AIR ADJUSTED PILOT

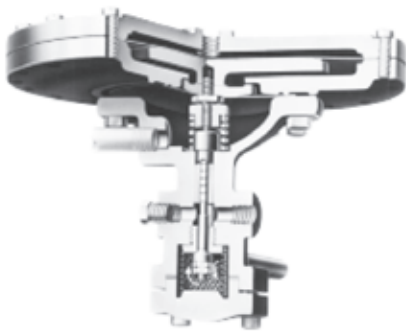

TYPE A85 AIR ADJUSTED
VACUUM PILOT

SIZING INFO PAGE 120

RATING (Maximum Inlet Conditions)

Construction	Pressure	Temperature
	PSIG (bar)	°F (°C)
CAST IRON		
Class Iron	250(17.2)@	450(232)
Class Steel	600(41.4)@	750(400)

APPLICATION DATA

- Pressure Regulating for Remote Locations
- Pneumatic Pressure Control
- Pneumatic Temperature Control
- Process Control where Controller is Far from Pilot

TYPICAL CONFIGURATIONS

PRESSURE REDUCING	TYPE EA
PRESSURE REDUCING	TYPE E2A
PRESSURE REDUCING	TYPE E5A
PRESSURE REDUCING	TYPE E6A
WATER PRESSURE REDUCING	TYPE C34A
TEMPERATURE & PRESSURE	TYPE EAT61

Canadian Registration # OC 0591.9C

CONTROLS 30 in. hg to 150 PSIG

- Air Loaded
- Remote Control
- Spring Operated
- Normally Closed
- Packless Construction
- Economic Use of Air
- Ease of Adjustment
- Accurate to ± 1 psi
- Delivery to Loading Air Pressure Ratios from 5/8 to 1 up to 6-2/3 to 1 psi
- Fluid, Gas & Vapor Applications
- Accurate Regulation Unaffected by Service Conditions
- Easy In-line Maintenance

OPTION

- Integral Mount
- Air Filter Regulation/Gauges

MODELS

- **TYPE A** for pressure control at low pressures. Delivery to loading pressure is 1 to 1 psi.
- **TYPE A35** for pressure control at very low delivery pressures as in some heating system control. Delivery to loading pressure is 1/2 to 1 psi.
- **TYPE A43 & A54** for pressure control at medium to high pressures. Delivery to loading pressure is 2 5/8 to 1 psi.
- **TYPE A53** for pressure control at medium pressures. Delivery to loading pressure is 4 to 1 psi.
- **TYPE A70 & A73** for pressure control at high delivery pressures when available loading air is at low pressure. Delivery to loading pressures are 15 and 6^{2/3} (respectively) to 1 psi.
- **TYPE A82 Vacuum** for pressure control of very low pressure or systems varying between very low pressure and light vacuum. Delivery to loading pressure is 1 to 1 psi.
- **TYPE A83 Vacuum** for temperature control. Delivery to loading pressure is 1 to 1 psi.
- **TYPE A84 Vacuum** for temperature control at lower delivery pressure features more gradual response. Delivery to loading pressure is 2% to 1 psi.
- **TYPE A85 Vacuum** for temperature, pressure and vacuum control. Delivery to loading pressure is 3% to 1 psi.
- **TYPE A86** for pressure control at low pressures. Delivery to loading pressure is 1 to 1% psi.
- **TYPE A87 Vacuum** for temperature, pressure and vacuum control. Delivery to loading pressure is 8% to 1 psi.

*Ranges are approximate.

TYPE A SERIES PILOTS


AIR ADJUSTED PILOTS

SPECIFICATION


The Pilot shall be separate from the main valve and connected to it with a male union. The Pilot shall be normally closed design with packless construction. A strainer screen shall be built into the Pilot inlet. The Pilot shall be interchangeable on all sizes of main valves.

MATERIALS OF CONSTRUCTION


Body, Cast Iron	ASTM A 126 Cl. B
Body, Cast Steel	ASTM A216 GR. WCB
Stem	303 St. St. ASTM A582 COND A
Disc	440 St. St. ASTM A276-75 COND A
Seat	420 St. St. ASTM A276 COND A
Gasket	Non-Asbestos
Diaphragm	301 St. St. MIL-5-5059C
Spring	Inconel




TYPE A OR A83
6 LBS (2.7 KG)

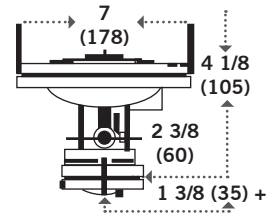


TYPE A83
11 LBS (5 KG)

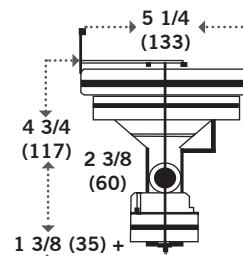


TYPE A43
11 LBS (5 KG)




TYPE A54
19 LBS (8.6 KG)




TYPE A73 OR A70
15 LBS (6.8 KG)



TYPE A53 OR A85
12 LBS (5.5 KG)

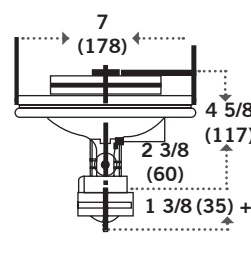


TYPE A35
14 LBS (6.4 KG)

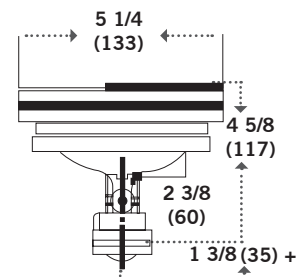


TYPE A84 OR A86
11 LBS (5 KG)

+For Integral Mount Pilot, this dimension is 5/8" (16).

PILOTS FOR POSITIVE PRESSURE

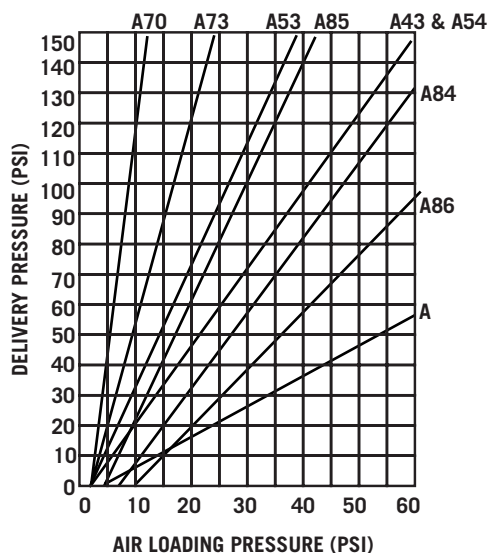


PILOTS FOR VACUUM PRESSURE

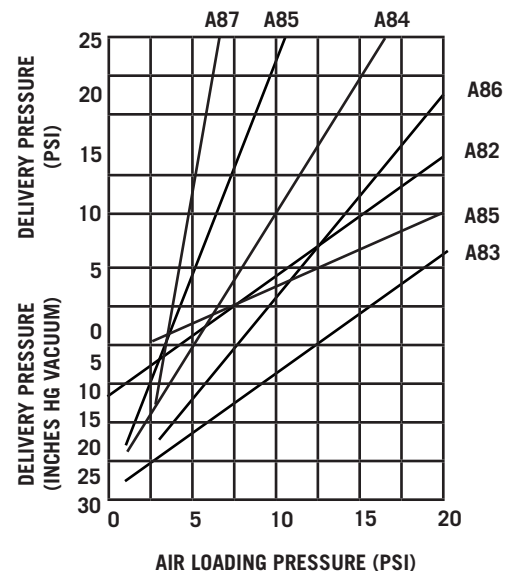


TYPE N SERIES PILOTS

DIFFERENTIAL PRESSURE PILOTS

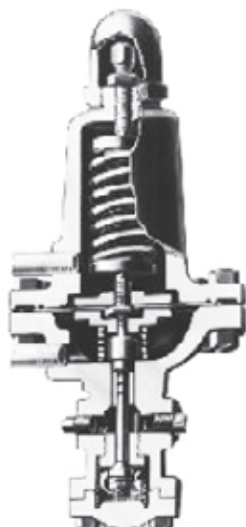

TYPE N PILOT

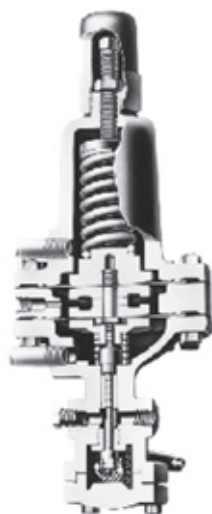

TYPE N33 PILOT

SIZING INFO PAGE 124

SPRING PRESSURE RANGE (PSIG).....

3-20	10-100
5-50	20-150

CONTROLS 3 to 150 PSIG

- Self Contained
- Spring Operated
- Normally Closed
- Packless Construction
- Accurate to ± 1 psi
- Four Adjustable Spring Ranges
- Fluid, Gas & Vapor Applications
- Loading Pressure Supplied by any Fluid
- Accurate Regulation Unaffected by Service Conditions
- Easy In-line Maintenance

OPTIONS

- Integral Mount (for N and N33)

MODELS

- **TYPE N** for delivery pressure at set differential above loading pressure. Available in four spring ranges. Includes integral strainer.
- **TYPE N20** for fixed differential between regulator's inlet pressure and some other lower pressure.
- **TYPE N33** for delivery pressure at set differential above loading pressure where it is essential there be no mixing of two fluids. Ensured by two diaphragms, separated by a vented space. Available in four spring ranges. Includes integral strainer.

APPLICATION DATA

- Boiler Feedwater Makeup
- Steam Atomizing for Oil Burners
- Heat Exchanger to maintain Constant Differential

TYPICAL CONFIGURATIONS

PRESSURE REDUCING	TYPE EN
PRESSURE REDUCING	TYPE E2N
PRESSURE REDUCING	TYPE E5N

RATING (Maximum Inlet Conditions)

Construction	Pressure	Temperature
	PSIG (bar)	°F (°C)

CAST IRON

Class Iron	250(17.2)	@	450(232)
Class Steel	600(41.4)	@	750(400)

TYPE N SERIES PILOTS


DIFFERENTIAL PRESSURE PILOTS

SPECIFICATION


The Pilot shall be separate from the main valve and connected to it with a male union. The Pilot shall have packless construction. The Pilot shall be interchangeable on all sizes of main valves.

MATERIALS OF CONSTRUCTION


Body, Cast Iron	ASTM A 126 Cl. B
Body, Cast Steel	ASTM A216 GR. WCB
Stem	303 St. Stl. ASTM A582 COND A
Disc	440 St. Stl. ASTM A276-75 COND A
Seat	420 St. Stl. ASTM A276 COND A
Gasket	Non-Asbestos
Diaphragm	301 St. Stl. MIL-5-5059C
Spring	Inconel

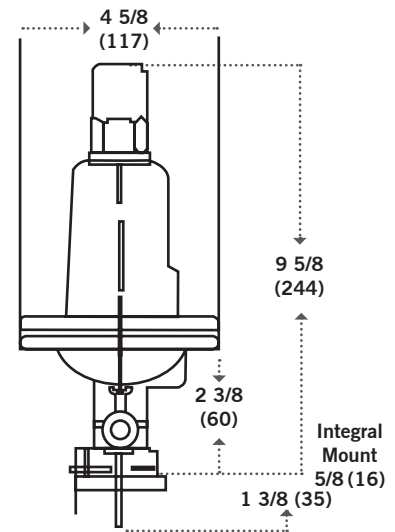

TYPE N PILOT
8 LBS
(3.6 KG)

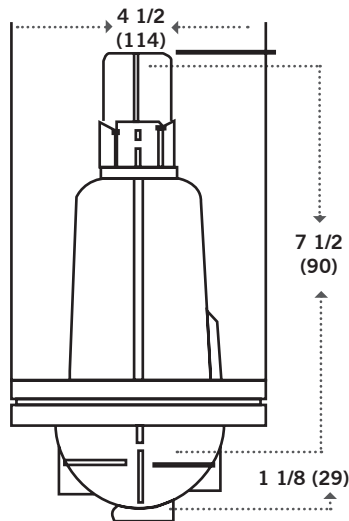

TYPE N20 PILOT
8 LBS
(3.6 KG)

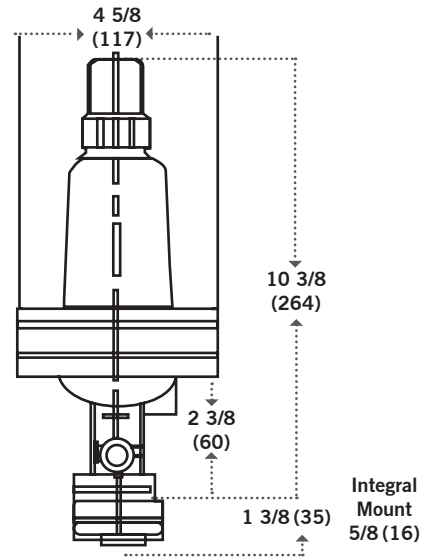

TYPE N33 PILOT
11 LBS
(5 KG)

TYPE P SERIES PILOTS

PUMP GOVERNOR PILOTS



TYPE P14 PILOT

SIZING INFO PAGE 128

RATING (Maximum Inlet Conditions)

Construction	Pressure	Temperature
	PSIG (bar)	°F (°C)

CAST IRON

Class Iron	250(17.2)@	450(232)
Class Steel	600(41.4)@	750(400)

SPRING PRESSURE RANGE (PSIG).....

P13	100-300	
P14	5-30	20-100 40-150
P15	3-10	5-25
P32	200-450	400-600

Canadian Registration # OC 0591.9C

CONTROLS 3 to 600 PSIG

- Self Contained
- Spring Operated
- Normally Open
- ANSI/FC1 70-2 Class IV Shutoff
- Packless Construction
- Accurate to ± 1 psi
- Three Adjustable Spring Ranges
- Steam Applications
- Constant Average Discharge Pressure
- Accurate Regulation Unaffected by Service Conditions
- Easy In-line Maintenance

OPTIONS

- Adjustment Indicator
- Integral Mount

MODELS

- **TYPE P13** features a spring for controlling pressures 100 to 300 PSI.
- **TYPE P14** features three spring ranges for controlling pressures 5 to 150 PSI.
- **TYPE P15** features two spring ranges for controlling pressures 3 to 25 PSI.
- **TYPE P32** is piston driven and features three spring ranges for controlling pressures 200 to 2000 PSI.

APPLICATION DATA

- Steam Driven Pump Control
- Steam Generated Output Control

TYPICAL CONFIGURATIONS

STEAM PUMP CONTROL	TYPE EP
STEAM PUMP CONTROL	TYPE E2P
STEAM PUMP CONTROL.....	TYPE E5P

TYPE P SERIES PILOTS


PUMP GOVERNOR PILOTS

SPECIFICATION


The Pilot shall be separate from the main valve and connected to it with a male union. The Pilot shall be normally open design with packless construction. A strainer screen shall be built into the Pilot inlet. The Pilot shall be interchangeable on all sizes of main valves. The pilot shall automatically adjust pump discharge pressures within the spring range to maintain a constant average pressure.

MATERIALS OF CONSTRUCTION


Body, Cast Iron	ASTM A 126 CI B
Body, Cast Steel	ASTM A216 GR. WCB
Stem	2024-T4 ASTM B211-75
Disc	440 St. St. ASTM A276-75 COND A
Seat	420 St. St. ASTM A276 COND A
Gasket	Non-Asbestos
Diaphragm	301 St. St. MIL-5-5059C
Spring	Steel ASTM A231

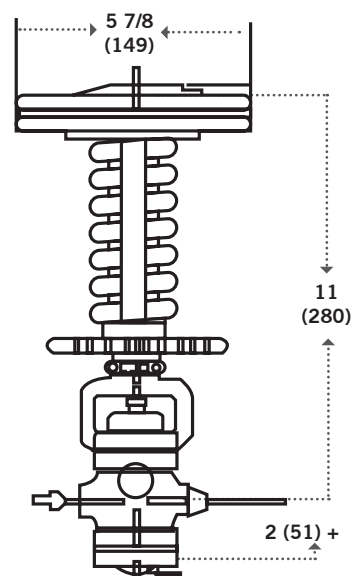


TYPE P14 PILOT
13 LBS.
(5.9 KG)

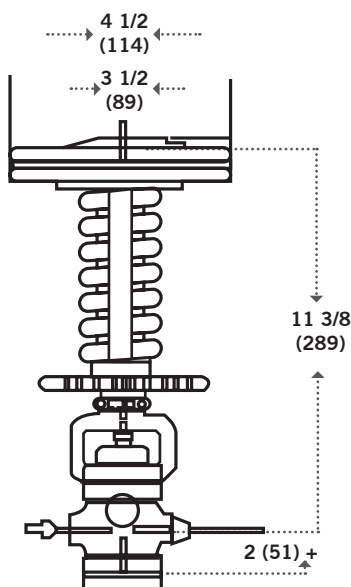

TYPE P32 PILOT
10 LBS.
(4.5 KG)

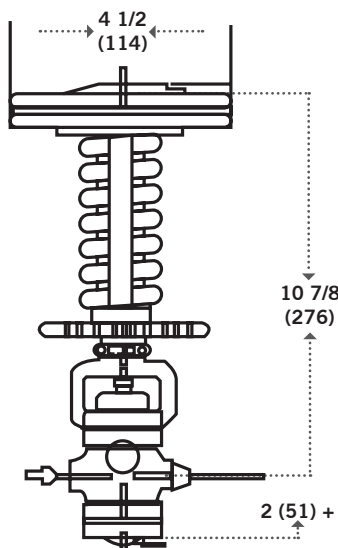

TYPE P13 PILOT
11 LBS.
(5 KG)

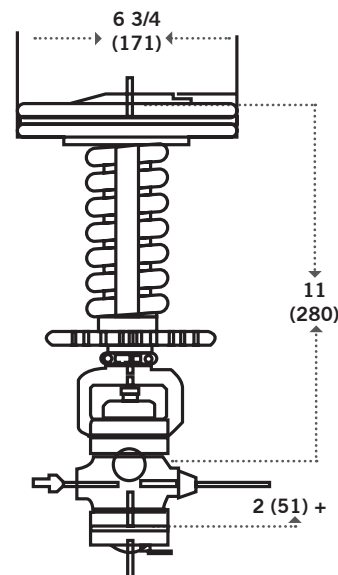

TYPE P15 PILOT
15 LBS.
(6.8 KG)

+For Integral Mount Pilot, this dimension is 11/16" (27)

TYPE F46

VACUUM PUMP GOVERNOR PILOT



TYPE F14 PILOT

SIZING INFO PAGE 128

CONTROLS to 30"Hg

- Self Contained
- Spring Operated
- Normally Closed
- ANSI/FC1 70-2 Class IV Shutoff
- Packless Construction
- Accurate to ± 1 psi
- Steam Applications
- Constant Average Discharge Pressure
- Accurate Regulation Unaffected by Service Conditions
- Easy In-line Maintenance

OPTIONS

- Adjustment Indicator
- Integral Mount

APPLICATION DATA

- Steam Driven Vacuum Pump Control

TYPICAL CONFIGURATIONS

VACUUM PUMP CONTROL TYPE EF46
 VACUUM PUMP CONTROL TYPE E2F46
 VACUUM PUMP CONTROL.....TYPE E5F46

RATING (Maximum Inlet Conditions)

Construction	Pressure PSIG (bar)	Temperature °F (°C)
--------------	------------------------	------------------------

CAST IRON

Class Iron	250(17.2)	@ 450(232)
Class Steel	600(41.4)	@ 750(400)

SPRING PRESSURE RANGE (PSIG)

30" hg-0 psi

Canadian Registration # OC 0591.9C

TYPE F46


VACUUM PUMP GOVERNOR PILOTS

SPECIFICATION

The Pilot shall be separate from the main valve and connected to it with a male union. The Pilot shall be normally open design with packless construction. A strainer screen shall be built into the Pilot inlet. The Pilot shall be interchangeable on all sizes of main valves. The pilot shall automatically adjust pump discharge pressures within the spring range to maintain a constant average pressure

MATERIALS OF CONSTRUCTION


Body, Cast Iron	ASTM A 126 Cl. B
Body, Cast Steel	1018 St. ASTM A108-79
Stem	303 St. St. ASTM A582 COND A
Disc	440 St. St. ASTM A276-75 COND A
Seat	420 St. St. ASTM A276 COND A
Gasket	Non-Asbestos
Diaphragm	301 St. St. MIL-5-5059C
Spring	Inconel

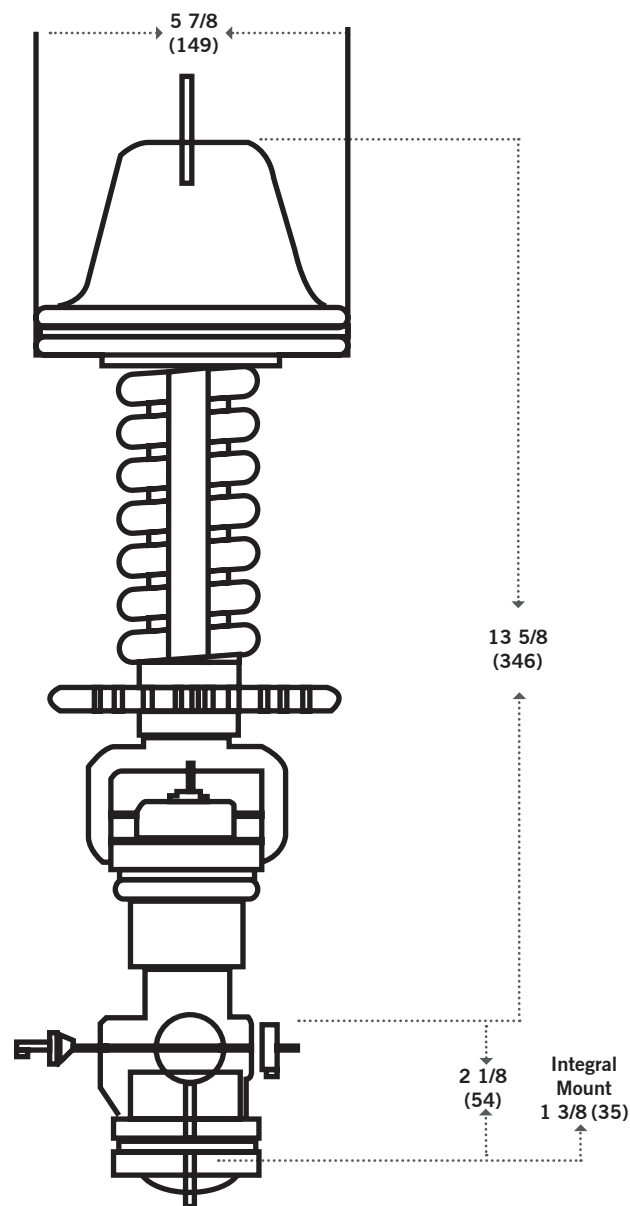

TYPE F46 PILOT
15 LBS
(6.8 KG)

TYPE Q SERIES PILOTS

BACK PRESSURE PILOTS

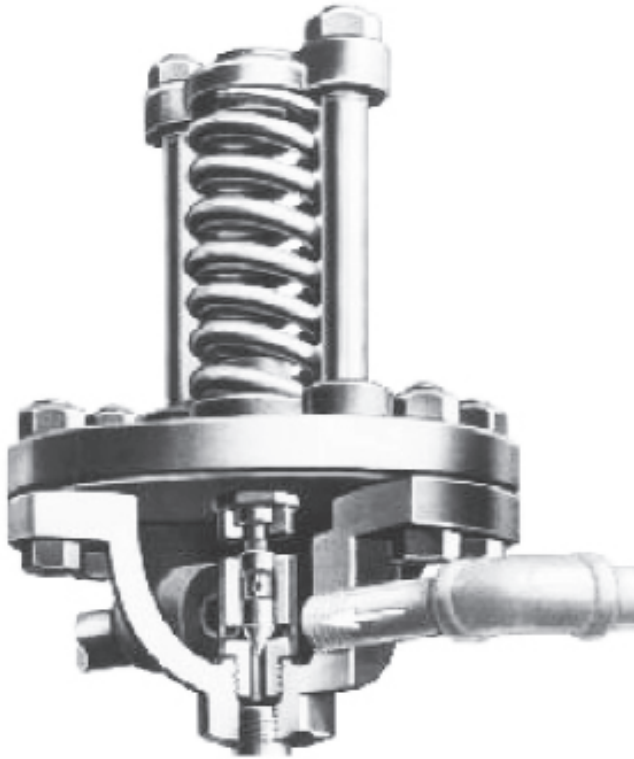

TYPE Q PILOT

SIZING INFO PAGE 126

RATING (Maximum Inlet Conditions)

Construction	Pressure PSIG (bar)	Temperature °F (°C)
--------------	------------------------	------------------------

CAST IRON

Class Iron	250(17.2)	@	450(232)
Class Steel	600(41.4)	@	750(400)

SPRING PRESSURE RANGE (PSIG)

TYPE Q	TYPE Q2
3-20	100-300
5-50	
10-100	
20-150	

Canadian Registration # OC 0591.9C

CONTROLS 3 to 300 PSIG

- Self Contained
- Spring Operated
- Normally Open
- Packless Construction
- Four Adjustable Spring Ranges
- Fluid, Gas & Vapor Applications
- Loading Pressure Supplied by any Fluid
- Accurate Regulation Unaffected by Service Conditions
- Easy In-line Maintenance

OPTIONS

- Enclosed Spring Chamber
- Adjusting Handle
- High Pressure

APPLICATION DATA

- Pump Bypass
- Maintain Upstream Pressure in Steam Distribution Systems
- Maintain Upstream Pressure in Liquid Distribution Systems

MODELS

- **TYPE Q** TYPE Q for ± 1 psig accuracy controlling back pressures between 3 and 150 psig
- **TYPE Q2** for ± 2 psig accuracy controlling back pressures between 100 and 300 psig.
- **TYPE Q73** air adjusted for ± 1 psig accuracy controlling back pressure at high retained pressures when available loading air is at low pressure. Delivery to loading pressure is 6-2/3 to 1 psig

TYPICAL CONFIGURATIONS

BACK PRESSURE CONTROL.....TYPE EQ
 BACK PRESSURE CONTROL.....TYPE E2Q
 BACK PRESSURE CONTROL TYPE E50

TYPE Q SERIES PILOTS


BACK PRESSURE PILOTS

SPECIFICATION


The Pilot shall be separate from the main valve and connected to it with a male union. The Pilot shall be normally closed design with packless construction. A strainer screen shall be built into the Pilot inlet. The Pilot shall be interchangeable on all sizes of main valves.

MATERIALS OF CONSTRUCTION


Body, Cast Iron	ASTM A 126 Cl. B
Body, Cast Steel	ASTM A216 GR. WCB
Disc	440 St. St. ASTM A276-75 COND A
Seat	440 St. St. ASTM A276 COND A
Gasket	Non-Asbestos
Diaphragm	301 St. St. MIL-5-5059C
Spring	Steel

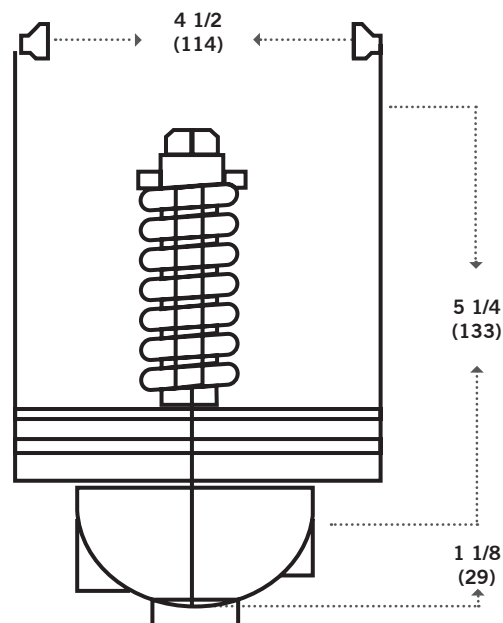


TYPE Q PILOT
7 LBS
(3.2 KG)

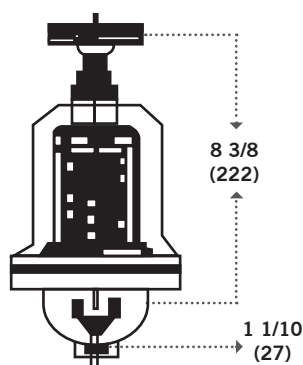


**ADJUSTING
HANDWHEEL**

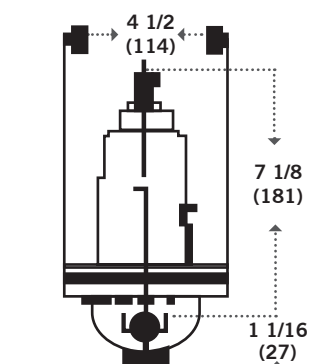

SPRING CHAMBER

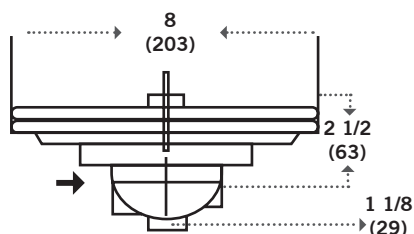

TYPE Q73 PILOT
15 LBS
(6.8 KG)

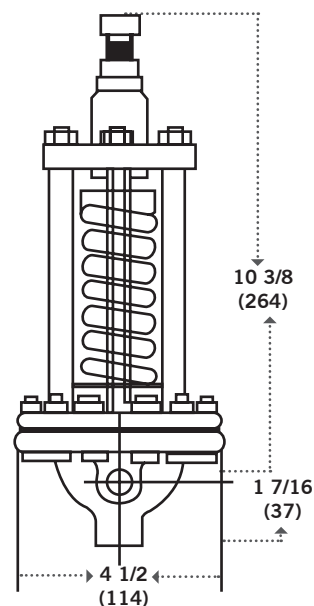

TYPE Q2 PILOT
10 LBS
(4.5 KG)

TYPE F SERIES PILOTS

BACK PRESSURE PILOTS



TYPE F32 PILOT

RATING (Maximum Inlet Conditions)

Construction	Pressure	Temperature
	PSIG (bar)	°F (°C)

CAST IRON

Class Iron	250(17.2)@	450(232)
Class Steel	600(41.4)@	750(400)

SPRING PRESSURE RANGE (PSIG)

TYPE F13	TYPE F14	TYPE F15	TYPE F32
100-300	3-30	2-10	200-450
	20-100	5-25	400-600
	40-150		

Canadian Registration # OC 0591.9C

CONTROLS 2 to 600 PSIG

- Self Contained
- Spring Operated
- Normally Closed
- ANSI/FCI 70-2 Class IV Shutoff
- Packless Construction
- Four Adjustable Spring Ranges
- Operates on remote / local pressure source
- Not Affected by Static Head
- Accurate Regulation Unaffected by Service Conditions

OPTIONS

- Adjustment Indicator
- Integral Mount

MODELS

- **TYPE F13** for ± 1 psi control of back pressure between 100 and 300 psi.
- **TYPE F14** for ± 2 psi control of back pressure between 3 and 150 and 300 psi.
- **TYPE F15** for $\pm 1/2$ psi control of back pressure between 2 and 25 psi.
- **TYPE F32** for ± 10 psi control of back pressure between 200 and 600 psi.

APPLICATION DATA

- Steam Backpressure Control
- Steam Backpressure Control with long control pipes
- Backpressure controlled by change in pressure of secondary fluid
- Backpressure control where a water leg on the pilot diaphragm cannot be avoided*

TYPICAL CONFIGURATIONS

BACK PRESSURE CONTROL	TYPE EF
BACK PRESSURE CONTROL	TYPE EF14D
BACK PRESSURE CONTROL	TYPE E2F
BACK PRESSURE CONTROL	TYPE E5F

TYPE Q SERIES PILOTS


BACK PRESSURE PILOTS

SPECIFICATION


Pilot shall be separate from the main valve and connected to it with a male union. The pilot shall be normally closed design with packless construction. A strainer screen shall be built into the pilot inlet. The pilot shall be interchangeable on all sizes of main valves.

MATERIALS OF CONSTRUCTION


Body, Cast Iron	ASTM A 126 Cl. B
Body, Cast Steel	ASTM A216 GR. WCB
Stem	2024-T4 ASTM B211-75
Disc	440 St. St. ASTM A276-75 COND A
Seat	440 St. St. ASTM A276 COND A
Gasket	Non-Asbestos
Diaphragm	301 St. St. MIL-5-5059C
Spring	Steel ASTM A231

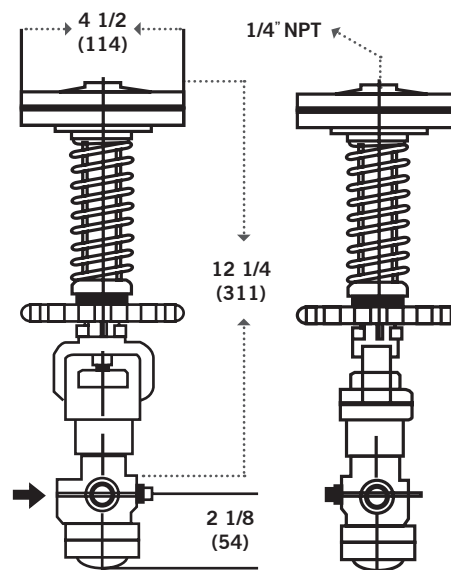


TYPE F13 PILOT
12 LBS
(5.5 KG)

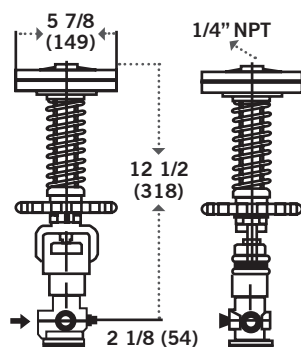

TYPE F14 PILOT
14 LBS
(6.4 KG)

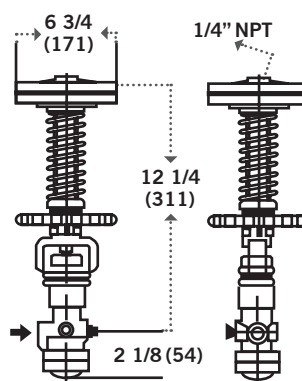

TYPE F15 PILOT
15 LBS
(6.8 KG)

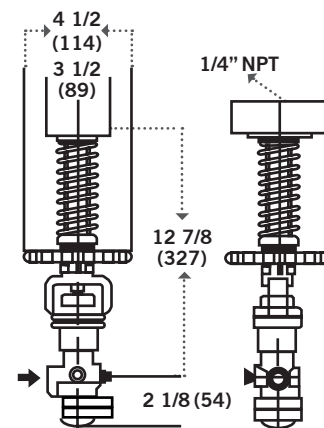

TYPE F32 PILOT
12 LBS
(5.5 KG)

TYPE P125

TRIP STOP PILOT



TYPE P125 TRIP STOP PILOT

RATING (Maximum Inlet Conditions)

Construction	Pressure	Temperature
	PSIG (bar)	°F (°C)

CAST IRON

Class Iron	250(17.2)@	450(232)
Class Steel	600(41.4)@	750(400)

SHUTOFF 5 to 175 PSI

- Self Contained
- Spring Operated
- Normally Closed
- Packless Construction
- Easy In-line Maintenance
- Quickly shuts off steam flow in the event of an over pressure condition
- Factory preset and tested for desired trip set point
- Trip setting unaffected by service conditions
- Manual reset feature keeps system safely shut down until control is regained

APPLICATION DATA

- Safety Shutoff For Over Pressure Conditions
- May Be Used When Conditions Disallow Use of SRV

TYPICAL CONFIGURATIONS

OVER PRESSURE SHUTDOWN.....	EP125
OVER PRESSURE SHUTDOWN.....	ESP125
OVER PRESSURE SHUTDOWN.....	E2P125

SPRING PRESSURE RANGE (PSIG)

5-25	10-50
40-150	150-175

Canadian Registration # OC 0591.9C

TYPE P125


TRIP STOP PILOT

SPECIFICATION

The Trip Stop Pilot shall be separate from the main valve and connected to it with a male union. The Pilot shall be normally closed design with packless construction. A strainer screen shall be built into the Pilot inlet. The Pilot shall be interchangeable on all sizes of main valves. The trip stop pilot shall maintain a Spence main valve in the open position while system pressure remains below set pressure. The pilot shall trip in the event of system overpressure, shutting main valve. Pilot shall be manually resettable and maintain safe shut off until reset.

MATERIALS OF CONSTRUCTION

Body, Cast Iron	ASTM 126 Cl. B
Body, Carbon Steel	ASTM 216 Gr. WCB
Stem	303 St. Stl. ASTM 582 Cond. A
Disc	440 St. Stl. ASTM 276-75 Cond. A
Seat	304 St. Stl. ASTM 276 Cond. A
Gasket	Non-asbestos

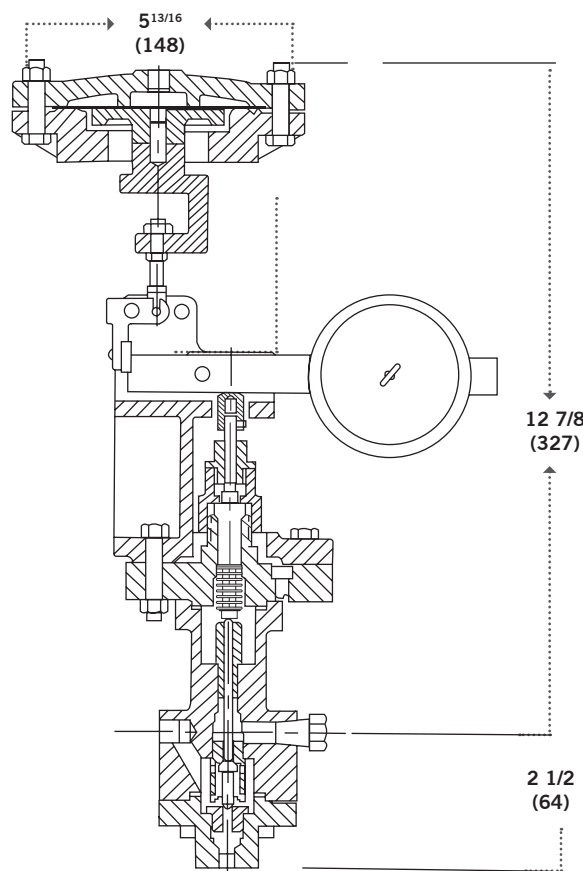

TYPE P125 TRIP STOP PILOT
CAST IRON 26 LBS. (12 KG)
CAST STEEL 28 LBS. (13 KG)

TYPE SP/P

PRESSURE SAFETY PILOT



TYPE SP/P PRESSURE SAFETY PILOT

CONTROLS to 600 PSI

- Self Contained
- Spring Operated
- Normally Closed
- Packless Construction
- Packless Construction
- Fluid, Gas & Vapor Applications
- Accurate Regulation Unaffected by Service Conditions
- Easy in-line Maintenance

APPLICATION DATA

- Where overpressure could cause personal injury or damage

TYPICAL CONFIGURATIONS

PRESSURE REDUCING.....TYPE EDSP/P
PRESSURE REDUCING.....TYPE E5DSP/P

RATING (Maximum Inlet Conditions)

Construction	Pressure		Temperature
	PSIG (bar)		t°F (°C)
CAST IRON			
Class Iron	250(17.2)	@	400(204)
Class Steel	600(41.4)	@	750(400)

SPRING PRESSURE RANGE (PSIG)

5-13	31-65	121-175
13-30	66-120	

Canadian Registration # OC 0591.9C

TYPE SP/P


PRESSURE SAFETY PILOT

SPECIFICATION

Pilot to be used to prevent an accidental rise in reducing valve pressure and not to be used as substitute for a safety relief valve. Valve is normally closed. Body to be cast steel rated 600 psig 750°F or bronze rated 300 psig 500°F. Valve must provide for easy in line maintenance and of packless construction. Operating pressure range to be determined by spring selection.

MATERIALS OF CONSTRUCTION

Body, Cast Iron	ASTM 126 Cl. B
Body, Carbon Steel	ASTM 216 Gr. WCB
Stem	303 St. Stl. ASTM 582 Cond. A
Disc	440 St. Stl. ASTM 276-75 Cond. A
Seat	420 St. Stl. ASTM A276 Cond. A
Gasket	Non-asbestos
Diaphragm	301 St. Stl. MIL-5-5059C
Spring	Inconel

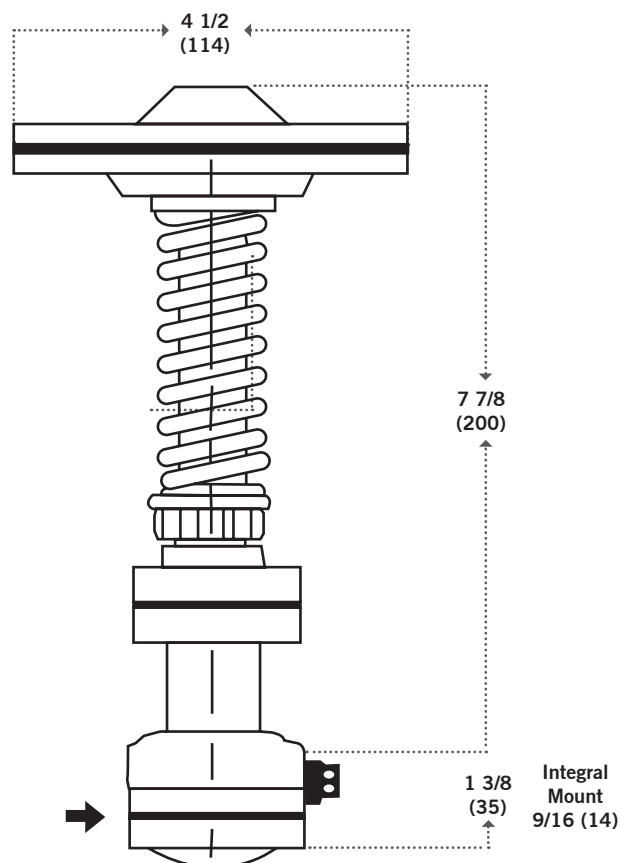

**TYPE SP/P PRESSURE
SAFETY PILOT
8 LBS. (3.6 KG)**

TYPE M SERIES PILOTS

SOLENOID PILOT



TYPE M SOLENOID PILOT

RATING (Maximum Inlet Conditions)			
Model	Pressure PSIG (bar)		Temperature °F (°C)
M24, M25	250(17.2)	@	200(93)
M26, M27	125(8.6)	@	180(82)
M32LP, M33, M34LP, M35LP	125(8.6)	@	363(178)
M32HP, M33HP, M34HP	250(17.2)	@	406(208)

Canadian Registration # OC 0591.9C

CONTROLS to 250 PSI

- Fast Acting for Quick Response
- Available Normally Open or Normally Closed

MODELS*

- **TYPE M24** 3-way normally open for cold fluids in straight solenoid valve applications
- **TYPE M25** 3-way normally closed for cold fluids in straight solenoid valve applications
- **TYPE M26** 2-way normally open for cold fluids in multiple pilot arrangements
- **TYPE M27** 2-way normally closed for cold fluids in multiple pilot arrangements
- **TYPE M32** 2-way normally open for steam or other hot fluid services in multiple pilot arrangements
- **TYPE M33** 2-way normally closed for steam or other hot fluid services in multiple pilot arrangements
- **TYPE M34** 3-way normally open for steam or other hot fluid services in straight solenoid valve applications
- **TYPE M35** 3-way normally closed for steam or other hot fluid services in straight solenoid valve applications

* For M32, M33, M34, M35 Pilots, add LP suffix for low pressure and HP suffix for high pressure

APPLICATION DATA

- Remote Electronic Shutoff of Regulators

TYPICAL CONFIGURATIONS

PRESSURE REDUCING	EMD
TEMPERATURE REGULATING	EMT14
TEMPERATURE & PRESSURE	 EMT134
TEMPERATURE & PRESSURE	EMT14D
DIFFERENTIAL PRESSURE REDUCING	E5M33N33

TYPE M SERIES PILOTS


SOLENOID PILOTS

SPECIFICATION


The actuator pilot shall open or close the controlled system via an external control signal. Actuator pilot shall be available in both fail open or fail closed upon loss of signal. Actuator pilot shall mount outside the main valve and provide remote on/off operation for a wide range of control variables

MATERIALS OF CONSTRUCTION

Head.....	Epoxy Coated aluminum (NEMA1)
.....	Polypropylene (NEMA 4)
Body	Brass
Internal Core Assembly.....	Ferrous & Brass
Bonnet Gasket	EPDM

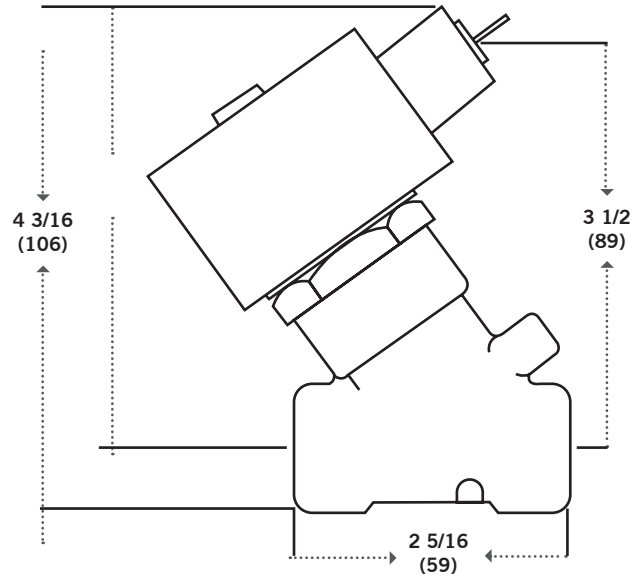

TYPE M33 SOLENOID PILOT 125#
3 LBS. (1.4 KG)

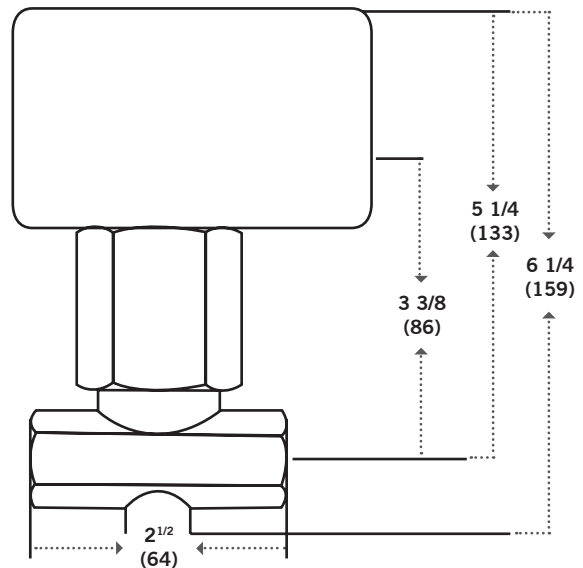

TYPE M33 SOLENOID PILOT 250#
6 LBS. (2.7 KG)

TYPE D208 SERIES

ELECTRONIC ACTUATOR PILOT WITH ELECTRONIC TIME CONTROLLER



**TYPE D208 ELECTRONIC
PILOT ACTUATOR**

CONTROLS to 150 PSIG

- Can save more than 4 times it's cost in building heating in one year.
- Controlled Incremental Positioning of Main Valve
- Electronic Time Controller (ETC) Opens and/or Closes Valve in up to 96 Minute Time Period*
- Ambient Temperatures 20 to 120 °F (-7 to 49°C)
- For use with Balanced Main Valve only

APPLICATION DATA

- Building Control Systems

OPTIONS

- Back-up (B.U.) Power Supply for up to 6 hours continued service during power failure.
- Explosion proof actuator, NEMA

TYPICAL CONFIGURATIONS

SLOW OPEN / CLOSE PRESSURE ED208D

RATING

D208 120VAC, 50-60HZ, .3AMPS
ETC 120VAC, 50-60HZ, .3AMPS
B.U. POWER SUPPLY..... 120VAC, 60HZ, up to 6AMPS

Canadian Registration # OC 0591.9C

*Timing periods are selectable from 6-96 minutes in 6 minute increments by setting a binary dip switch.

TYPE D208

ELECTRONIC ACTUATOR PILOT

WITH ELECTRONIC TIME CONTROLLER


SPECIFICATION

The Actuator Pilot shall slowly close and/or open the steam system in a safe, quiet manner by incrementally reducing and/or increasing the pressure under the main valve diaphragm until it reaches dead-end shutoff or is fully open. In the event of a power failure, it shall stop in its present position unless a back-up power supply is specified. Such backup power supply shall provide a minimum of specified hours of operation and be maintained in a fully charged standby condition automatically.


The Actuator Pilot shall be controlled by a totally solid state Electronic Time Controller which shall incrementally open and/or close the Actuator Pilot with 320 pulses in periods from 6-96 minutes and shall be field adjustable in multiples of 6 minutes.

MATERIALS OF CONSTRUCTION

Body, Cast IronASTM 126 Cl. B
 Body, Carbon SteelASTM 216 Gr. WCB
 Stem303 St. Stl. ASTM 582 Cond. A
 Disc440 St. Stl. ASTM 276-75 Cond. A
 Seat420 St. Stl. ASTM 276 Cond. A
 GasketNon-asbestos

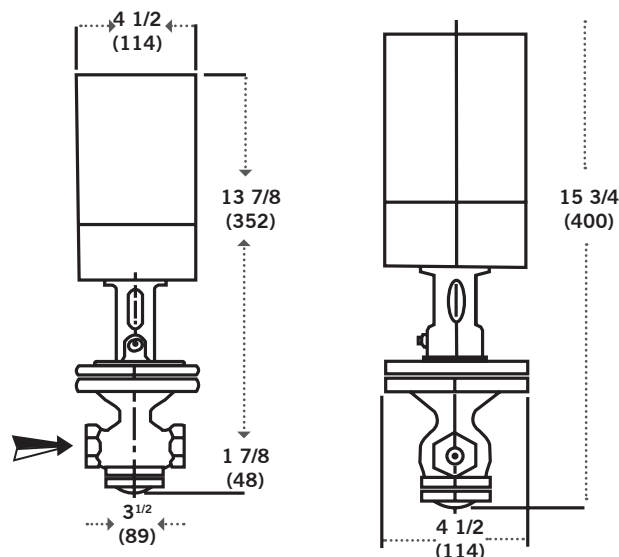

**TYPE D208 ELECTRONIC
ACTUATOR PILOT**

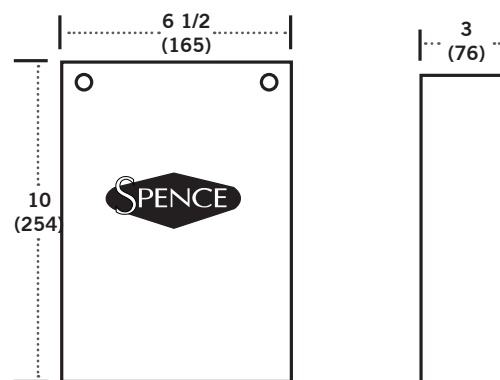

**TYPE D208 ELECTRONIC
TIME CONTROLLER (ETC)**

TYPE D210

ELECTRONIC ACTUATOR PILOT WITH MODULATING SERVO-AMPLIFIER



**TYPE D210 ELECTRONIC
PILOT ACTUATOR**

CONTROLS to 150 PSIG

- Modulate Process Variable in Relation to a Proportional Control Input Signal
- Servo-Amplifier provides Continuous Signal for Immediate Response
- Ambient Temperatures 20 to 120°F (-7 to 49°C)
- For use with Balanced Main Valve only

APPLICATION DATA

- Building Control Systems

OPTIONS

- Back-up Power Supply for up to 6 hours continued service during power failure.
- Explosion proof actuator, NEMA
- Fail-Safe Device to stroke Actuator half or full open on input signal failure.

TYPICAL CONFIGURATIONS

4-20 MA PROPORTIONAL CONTROL.....ED210

RATINGS

D210.....120VAC, 50-60HZ, .3 AMPS
Servo-Amplifier.....120VAC, 50-60HZ, .3 AMPS
B.U. Power Supply.....120VAC, 60HZ, up to 6 AMPS

INPUT SIGNALS

1-5 mA
4-20 mA
10-50 mA
Selectable from 0-24 VDC

Canadian Registration # OC 0591.9C

TYPE D210

ELECTRONIC ACTUATOR PILOT WITH MODULATING SERVO-AMPLIFIER


SPECIFICATION

The Actuator Pilot shall maintain a system and modulate that system as requirements dictate. A continuous signal (1-5 mA, 4-20 mA, 10-50 mA or 0-24 VCD) is transmitted by the system control to the Servo-Amplifier which positions the Actuator Pilot. In the event of a power failure, the Actuator Pilot shall stop in its present position unless a back-up power supply is specified. Such backup power supply shall provide a minimum of specified hours of operation and be maintained in a fully charged standby condition automatically.


In the event of signal failure, the Actuator Pilot shall close unless a Fail-Safe Device is specified in the Servo-Amplifier which will be factory set to stroke the Actuator Pilot half open or full open.

MATERIALS OF CONSTRUCTION

Body, Cast Iron	ASTM 126 Cl. B
Body, Steel	ASTM 216 Gr. WCB
Stem	303 St. Stl. ASTM 582 Cond. A
Disc	440 St. Stl. ASTM 276-75 Cond. A
Seat	304 St. Stl. ASTM 276 Cond. A
Gasket	Non-Asbestos

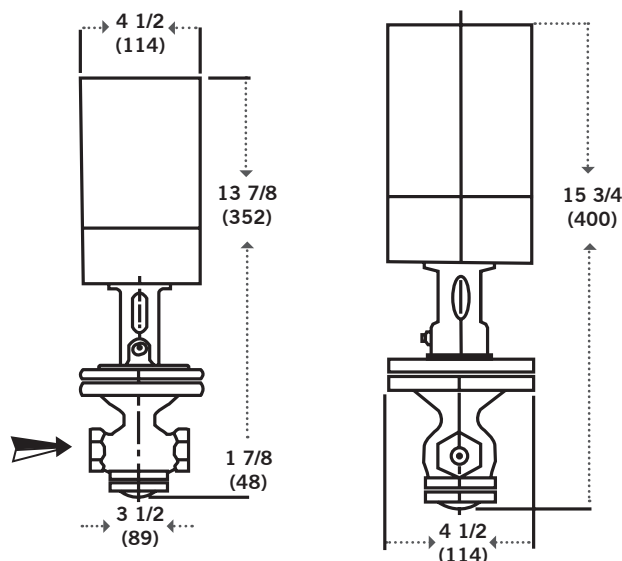

**TYPE D210 ELECTRONIC
ACTUATOR PILOT**

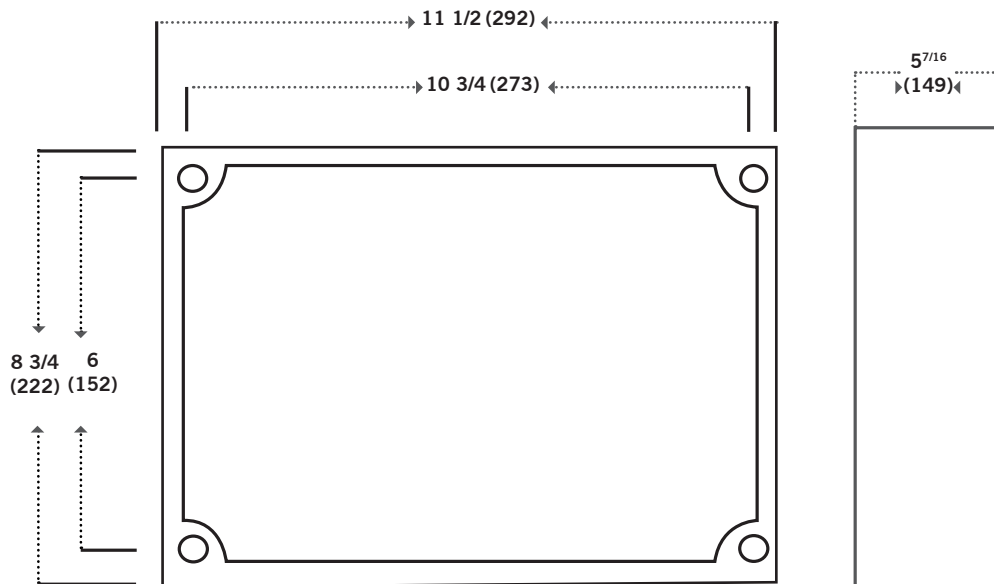

TYPE D210 SERVO-AMPLIFIER

TYPE VH210

ELECTRONIC ACTUATOR PILOT



ELECTRONIC DATA.....

- 4-20 mA or 0-10 VDC Input Signals
- 24 VAC 50-60 Hz Power Supply
- 17VA/12W Power Consumption
- UL Listed (UL873)


Inlet Pressures to 250 PSIG

Modulate Process Variable in Relation to a Proportional Control Input Signal

- **Spring Return Fail Closed** - Returns actuator to a closed position on power loss in 3 seconds or less.
- **Manual Override** - Allows simple field adjustment on signal or power loss.
- **NEMA 1 Enclosure** - Protects electronic components from industrial environments.
- **High Thrust Motor** - Allows Class IV shutoff.
- **Rapid Response** - Reacts to direct changes in 0-10 VDC or 4-20 mA signals from process controllers.
- **Cast Aluminum Yoke and Housing** - Provides years of trouble free actuator operation.
- **Standard Pilot Lower Body** - Uses proven design for dependability and compatibility with existing Spence Pilot installations.
- **Seamless Integration** - Balanced Main valve construction not required.
- **Multi Variable Control** - Pressure and Temperature control when integrated with additional Spence pilot.

APPLICATIONS

- E-Main Valve Pilot (Pressure / Temperature)
- Building Control Systems
- SCADA
- PLC
- Upgrading E Main Installations for Automated Control

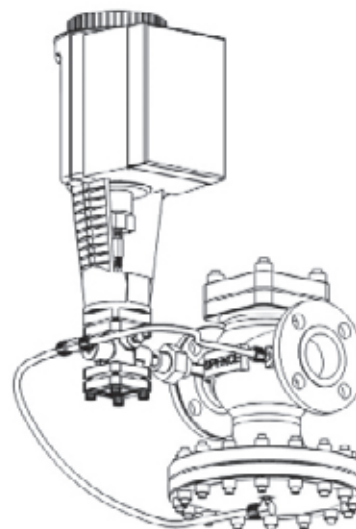

TYPE VH210



ELECTRONIC ACTUATOR PILOT

SPECIFICATION

The electronic actuator pilot shall maintain a system variable and modulate the valve travel in response to that system variable as requirements dictate. A continuous signal (4-20 mA, 0-10 VDC) is transmitted by the system controller to the actuator which positions the valve stem. In the event of power loss, the electronic actuator pilot shall return to a closed position

MATERIALS OF CONSTRUCTION

Body, Cast Iron.....	ASTM 126 CI B
Body, Steel.....	ASTM A216 GR. WCB
Stem.....	303 SS ASTM 582 Cond. A
Disc.....	440 SS ASTM 276-75 Cond. A
Seat.....	304 SS ASTM 276 Cond. A
Gasket.....	Non-Asbestos

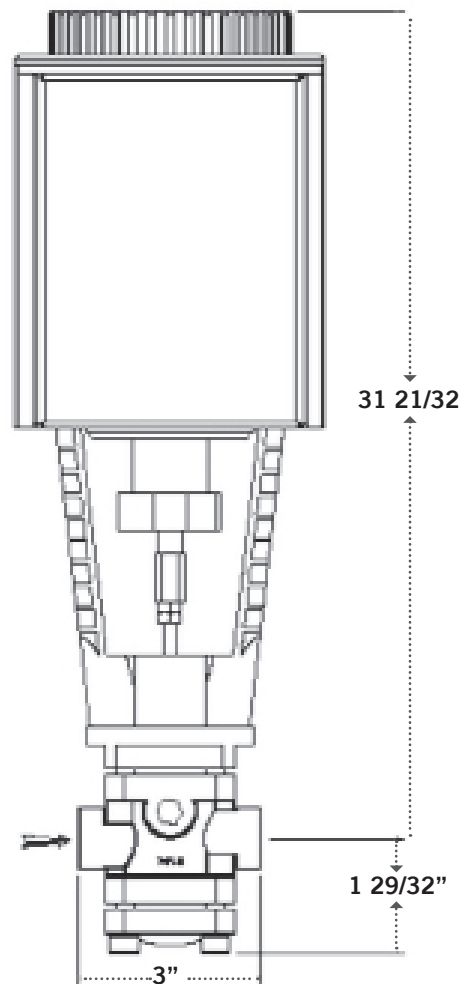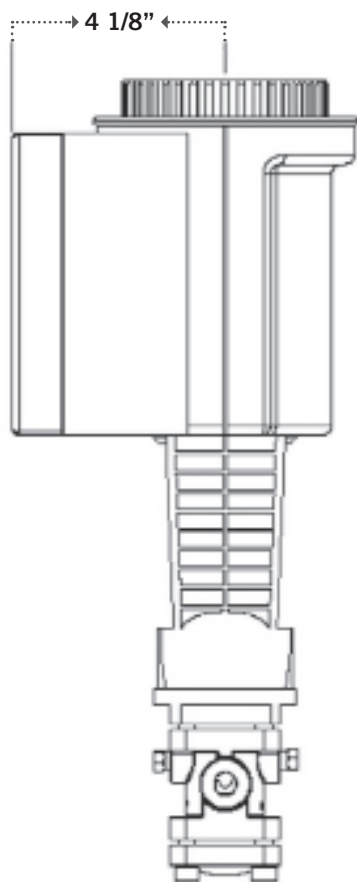

TYPE VH210 ELECTRONIC PILOT
12.5 LBS (5.7 KG)

TYPE T124/134

TEMPERATURE/PRESSURE PILOTS



TYPE T134
TEMPERATURE / PRESSURE PILOT

SIZING INFO PAGE 122

RATING (Maximum Inlet Conditions)

Construction	Pressure PSIG(bar)		Temperature °F(°C)
Cast Iron	250 (17.2)	@	450 (232)
Cast Steel	600 (41.4)	@	750 (400)

TEMPERATURE RANGES (°F)

20-120	150-300	300-400
50-150	170-270	330-430
70-170	250-350	400-500
120-220	290-390	

Canadian Registration # OC 0591.9C

*Cast Steel available in T134 only.

CONTROLS 20 to 500°F

- Precise, Rapid Response
- Vapor Tension Thermostat Spring Operated
- Self Contained
- Normally Open
- Packless Construction
- Fluid, Gas and Vapor Applications
- Strainer Screen Built-in
- Easy in-line Maintenance
- Temperature and Pressure in One Pilot

APPLICATION DATA

- Instantaneous Water Heaters
- Jacketed Kettles
- Oil Heaters • Vats
- Storage Heaters • Driers
- Process Heaters • Ovens

MODELS

- **TYPE T124** for heater operating pressures between 20 and 125 psi.
- **TYPE T134** for heater operating pressures up to 20 psi.

OPTIONS

- Bronze or Stainless Thermostat
- Thermostat Well
- Dial Thermometer
- Tubing from 5' to 50'
- Integral Mount

THERMOSTATS

700	706	731
701	708	732
702	711	740
703	712	800
704	713	801

TYPICAL CONFIGURATIONS

TEMPERATURE & PRESSURE	ET124
TEMPERATURE & PRESSURE	ET134
TEMPERATURE & PRESSURE	E2T134
TEMPERATURE & PRESSURE	E5T124

TYPE T124/134




TEMPERATURE/PRESSURE PILOTS

SPECIFICATION

Pilot valve shall be separate from the main valve and connected to it by unions. Pilot seats shall be protected by built-in strainer screens. Pilots shall be interchangeable on all sizes of main valves. Thermal elements shall provide a 100°F (38°C) range of temperature adjustment and shall withstand 100°F (38°C) overheating without damage. Handwheel adjustment for temperature shall be standard. Unless otherwise scheduled, thermal elements shall be equipped with "5 to 50 feet" of brass flexible tubing. Number 700 bronze bulb and Number 728 bronze well shall be included except with instantaneous heaters serving intermittent demand. Steel wells shall be supplied for fuel oil service on storage tank applications

MATERIALS OF CONSTRUCTION

Body, Cast Iron	ASTM A 126 CI B
Body, Steel	ASTM A 216 WCB
Stem	416 St. St. ASTM A 582-75
Disc	440 St. St. ASTM A 582 COND A
Seat	420 St. St. ASTM A 582 COND A
Gasket	Graphite
Diaphragm	301 St. St. MIL-5-5059C
Spring	Steel

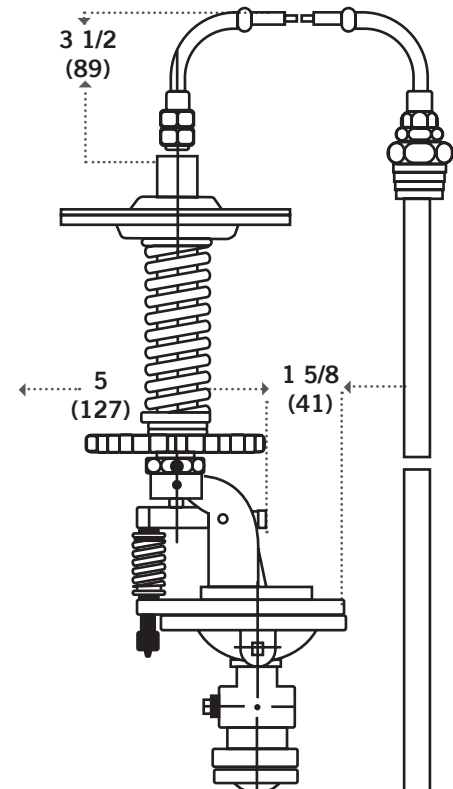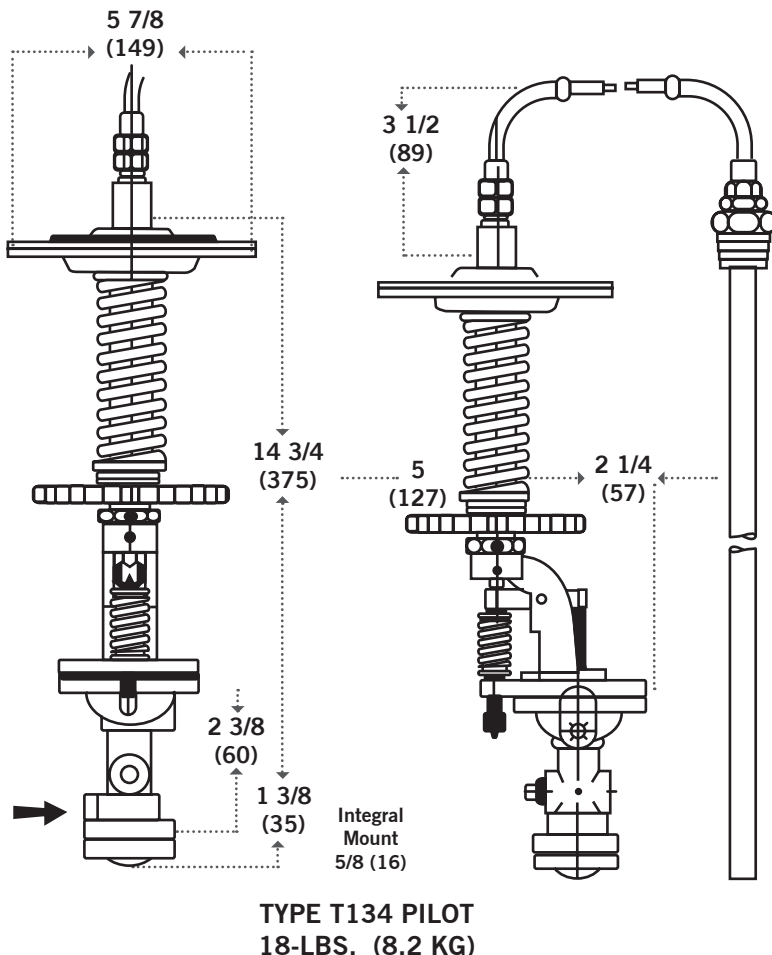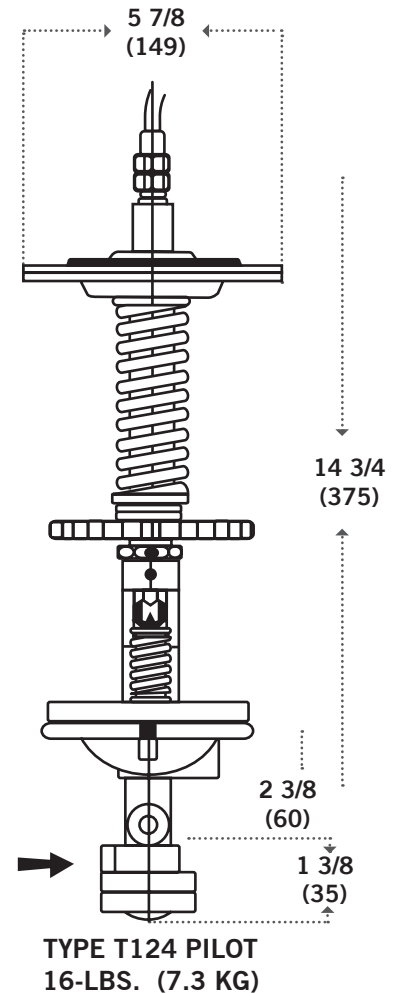

TYPE T14

VAPOR TENSION TEMPERATURE PILOT

CONTROLS 20 to 500°F

- Precise, Rapid Response
- Spring Operated
- Self Contained
- Normally Open, Direct Operation {Heating}
- Packless Construction
- Fluid, Gas and Vapor Applications
- Strainer Screen Built-in
- Easy in-line Maintenance

OPTIONS

- Bronze or Stainless Thermostat
- Thermostat Well
- Dial Thermometer
- Tubing from 5' to 50'
- Integral Mount

THERMOSTATS

700	706	731
701	708	732
702	711	740
703	712	
704	713	

TYPICAL CONFIGURATIONS

TEMPERATURE REGULATING.....	ET14
TEMPERATURE & PRESSURE.....	ET14D
TEMPERATURE REGULATING.....	E2T14
TEMPERATURE & PRESSURE.....	E2T14D
TEMPERATURE REGULATING.....	E5T14
TEMPERATURE & PRESSURE.....	E5T14D

RATINGS (Maximum Inlet Conditions)

	Pressure	Temperature
Construction	PSIG (bar)	°F (°C)
Cast Iron	250 (17.2)	450 (232)
Cast Steel	600 (41.4)	750 (400)

Canadian Registration# OC 0591.9C



TYPE T14 TEMPERATURE PILOT

APPLICATION DATA

- Storage Heater
- Jacketed Kettles
- Vats

TEMPERATURE RANGES (°F)

20-120	150-300	300-400
50-150	170-270	330-430
70-170	250-350	400-500
120-220	290-390	

TYPE T14



VAPOR TENSION TEMPERATURE PILOT

SPECIFICATION

Pilot valve shall be separate from the main valve and connected to it by unions. Pilot seats shall be protected by built-in strainer screens. Pilot shall be interchangeable on all sizes of main valves. Thermal elements shall provide a 100°F (38°C) range of temperature adjustment and shall withstand 100°F overheating without damage. Handwheel adjustment for temperature shall be standard. Unless otherwise scheduled, thermal elements shall be equipped with "5 to 50 feet" of brass flexible tubing. Number 700 bronze bulb, Number 728 bronze well shall be supplied for storage tank applications. Steel wells shall be supplied for fuel oil service.

MATERIALS OF CONSTRUCTION

Body, Cast Iron	ASTM A 126 Cl B
Body, Steel	ASTM A 216 GR. WCB
Stem	2024-T4 ASTM 8211-75
Disc	440 St. St. ASTM A 276- 75 COND A
Seat	420 St. Stl ASTM A 276 COND A
Gasket	Graphite
Diaphragm	Bronze ASTM 8103-77 UNS C51000
Spring	Steel

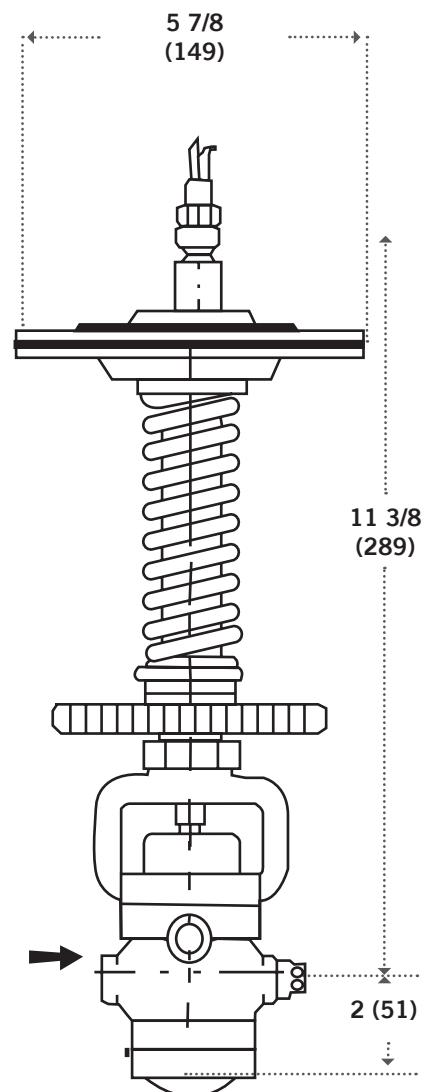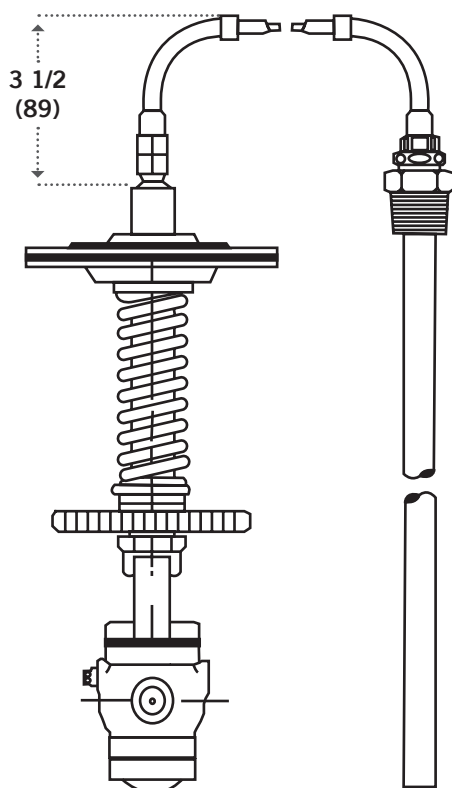

TYPE T14 TEMPERATURE PILOT
13 LBS. (6 KG)

TYPE T52

TEMPERATURE PILOT

CONTROLS 20 to 500°F

- Spring Operated
- Self Contained
- Normally Closed, Indirect Operation (Cooling)
- Packless Construction
- Fluid, Gas and Vapor Applications
- Strainer Screen Built-in
- Easy in-line Maintenance

OPTIONS

- Bronze or Stainless Thermostat
- Dial Thermometer
- Integral Mount
- Thermostat Well
- Tubing from 5' to 50'

THERMOSTATS

700	706	731
701	708	732
702	711	740
703	712	800
704	713	801

TYPICAL CONFIGURATIONS

COOLING	C34T52
COOLING & PRESSURE	C34T52D
COOLING	E6T52
COOLING & PRESSURE	E6T52D
COOLING	ET52
COOLING & PRESSURE	ET52D
COOLING	E2T52
COOLING & PRESSURE	E2T52D
COOLING	E5T52
COOLING & PRESSURE	E5T52D

RATINGS (Maximum Inlet Conditions)

	Pressure	Temperature
Construction	PSIG (bar)	°F (°C)
Cast Bronze	250 (17.2)	@ 450 (232)
Cast Steel	600 (41.4)	@ 750 (400)

Canadian Registration# OC 0591.9C



TYPE T52 TEMPERATURE PILOT

APPLICATION DATA

- Control Flow of Cooling Liquid
- Blending

TEMPERATURE RANGES (°F)

20-120	150-300	300-400
50-150	170-270	330-430
70-170	250-350	400-500
120-220	290-390	

TYPE T52



TEMPERATURE PILOT

SPECIFICATION

Pilot valve is for cooling applications (reverse acting). Pilot valve shall be separate from the main valve and connected to it by unions. Pilot seats shall be protected by built-in strainer screens. Pilot shall be interchangeable on all sizes of main valves. Thermal elements shall provide a 100°F (38°C) range of temperature adjustment and shall withstand 100°F overheating without damage. Handwheel adjustment for temperature shall be standard. Unless otherwise scheduled, thermal elements shall be equipped with "5 to 50 feet" of brass flexible tubing. Number 700 bronze bulb, Number 728 bronze well shall be supplied for storage tank applications. Steel wells shall be supplied for fuel oil service

MATERIALS OF CONSTRUCTION


Body, Cast Iron.....	ASTM A 126 C53
Body, Steel.....	ASTM A 108- 79
Stem.....	.303 St. Stl ASTM 582 Cond. A
Disc.....	.440 St. Stl. ASTM 276-75 Cond. A
Seat.....	.420 St. Stl ASTM 276 Cond. A
Gasket.....	Graphite
Bronze.....	PH
Inconel.....	Spring

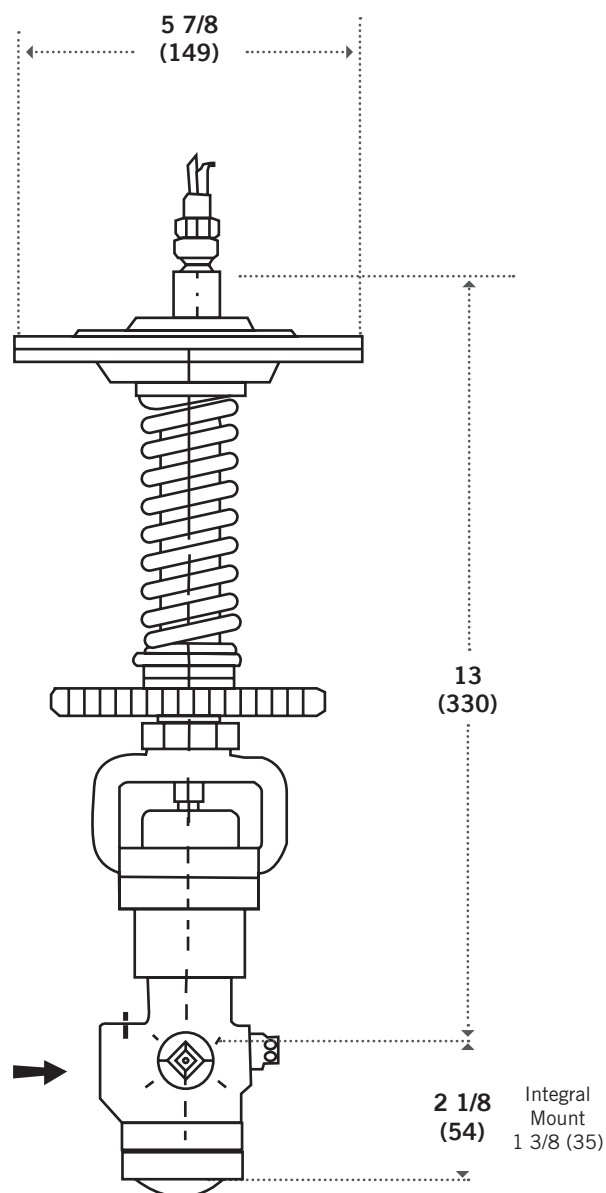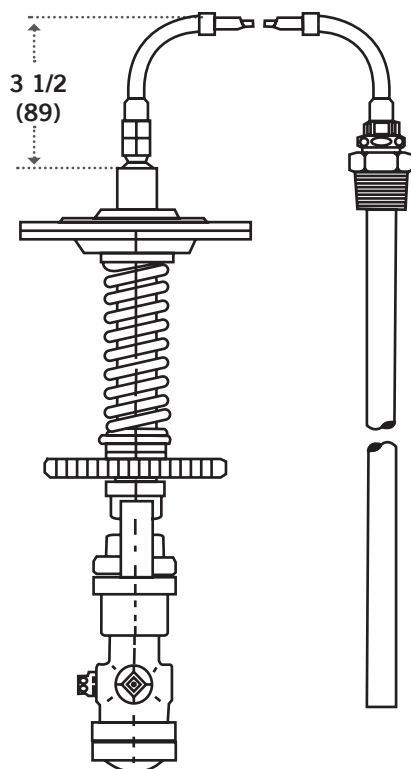

TYPE T52 PILOT
14 LBS. (6.4 KG)

TYPE SP/T

TEMPERATURE SAFETY PILOT

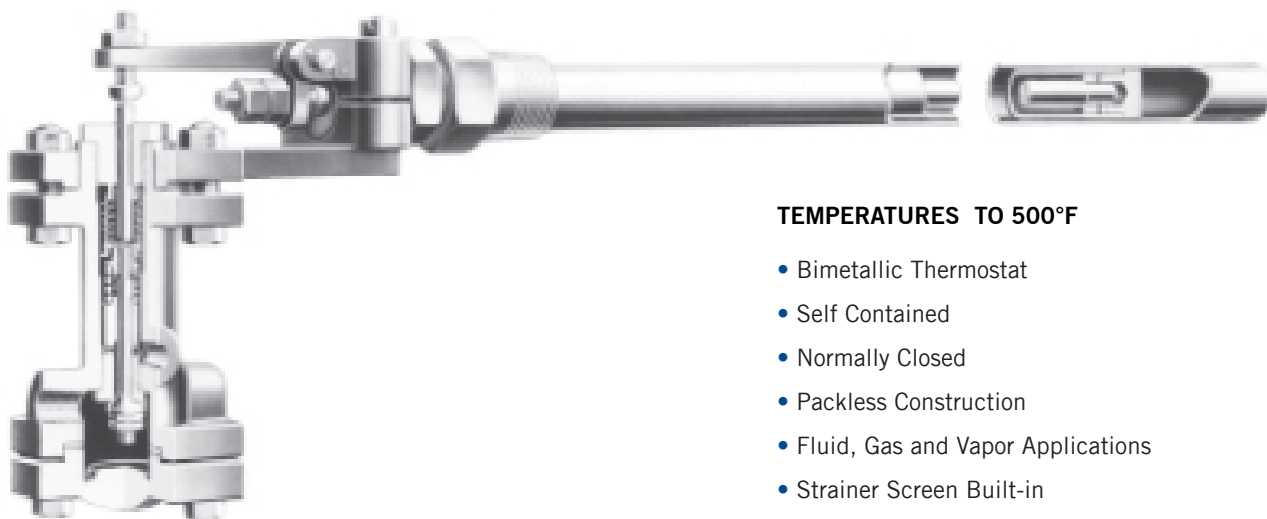

TYPE SP/T TEMPERATURE SAFETY PILOT

SPECIFICATION

Pilot to be used to insure that pressure regulator will not fail open. Pilot to be bronze, with stainless steel trim. Pilot to be normally closed and to employ a bimetallic element that will ensure that the pilot will fail open. Pilot to be of packless construction to provide for long service life. Pilot to have a built in strainer for protection

MATERIALS OF CONSTRUCTION

BodyBronze ASTM 861-80 UNS C92200
 Stem303 St. Stl. ASTM A582 Cond A
 Disc44°C St. Stl. ASTM A276-75 Cond A
 Seat420 St. Stl. ASTM A276 Cond A
 GasketNon-asbestos
 BellowsBronze
 BulbBronze ASTM 862-80 UNS C31400

TEMPERATURES TO 500°F

- Bimetallic Thermostat
- Self Contained
- Normally Closed
- Packless Construction
- Fluid, Gas and Vapor Applications
- Strainer Screen Built-in
- Easy in-line Maintenance

TYPICAL CONFIGURATIONS

TEMPERATURE REGULATING ET14SP/T
 TEMPERATURE REGULATING ET134SP/T

APPLICATION DATA


- Where overheating could cause personal injury or damage

RATINGS (Maximum Inlet Conditions)

	Pressure	Temperature
Construction	PSIG (bar)	°F (°C)
Cast Bronze	300 (21.0)	500°F (260°C)
Cast Steel	600 (41.3)	750°F (400°C)

TEMPERATURE RANGES (°F)

0-500

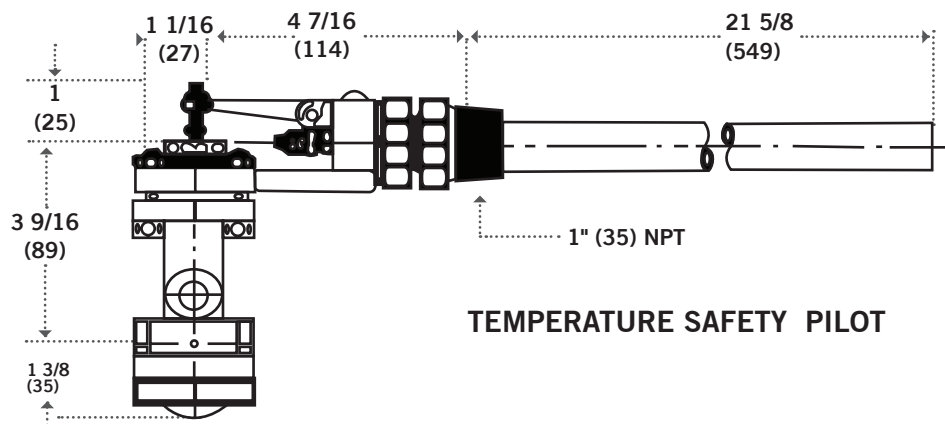

TEMPERATURE SAFETY PILOT

TYPE T61, T62, T63, T64

PNEUMATIC TEMPERATURE CONTROLLERS

TEMPERATURES TO 350°F


- Bimetallic Thermostat for Fast Response
- Pinpoint Accuracy
- 200°F Adjustable Temperature Range
Air Consumption - Average .25, Maximum .7
- Adjustable Proportional Band 1/4-2 psi per 1°F
- Overtemperature Protection
- Air Supply Pressure 30 psi

MODELS


- **TYPE T61** for applications where air control signal decreases as process temperature increases.
- **TYPE T62** for applications where air control signal increases as process temperature increases.
- **TYPE T63** for high temperature applications where air control signal decreases as process temperature increases.
- **TYPE T64** for sanitary applications where air control signal decreases as process temperature increases. Supplied with IAMD Sanitary Cap.

TYPICAL CONFIGURATIONS

PRESSURE & TEMPERATURE.....EA85T61

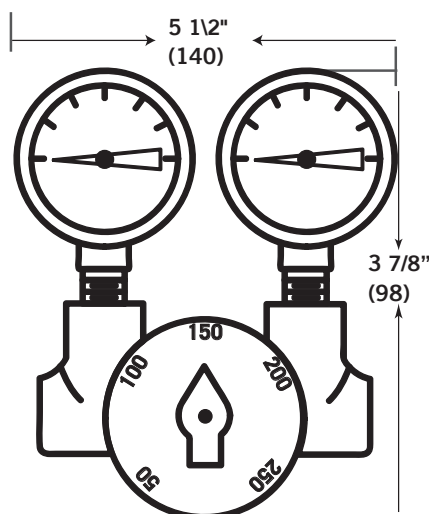

TYPE T61, T62, T63, T64 CONTROLLER

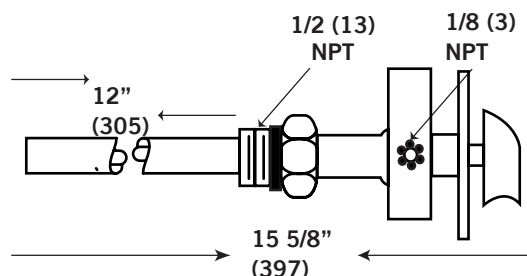

TYPE T61 PNEUMATIC TEMPERATURE CONTROLLER

APPLICATION DATA

- Instantaneous Heaters
- Process Applications with wide ranging, fast changing loads

RATINGS (Maximum Inlet Conditions)

Pressure PSIG (bar)	Temperature °F (°C)
250 (17.2)	400 (204)

TEMPERATURE RANGES °F

T61, T62, T64	50-250
T63	150-350

SPECIFICATION

The temperature controller shall be of the non-indicating type. It shall be equipped with 0-30 psi supply and loading gages. The controller shall have 200°F adjustable range and be equipped with a bronze bulb as part of its bimetal thermostat. Control point adjustments to be made by a knob on the temperature pilot and throttling range shall be adjustable externally with a set crew wrench. A stainless steel thermostat bulb, preferable in lieu of a well, is available as an alternate to bronze

MATERIALS OF CONSTRUCTION

Body.....	Bronze ASTM 862-80 UNS C83600
Body, Bronze.....	ASTM 8140-80 UNS C31400
Body, Bulb, Steel.....	316 St. Stl. ASTM A276 Cond. A
Seals.....	Viton
Spool.....	Brass ASTM B 16-80 UNS 36000
Seat.....	304 St. Stl. ASTM 276 Cond. A
Spring.....	St. Steel

MATERIAL SPECIFICATIONS FOR MAIN VALVES & PILOTS

MAIN VALVE & PILOT BODIES

Cast Iron.....	ASTM A 126	Class B
Cast Carbon Steel.....	ASTM A216	WCB
Cast Bronze.....	ASTM 861	C92200

STEEL PLATE FLANGES & HOODS-FLANGE QUALITY

..... ASTM A285 Grade C

NUTS

Steel Valves.....	ASTM A194- 79	Grade 2H
Cast Iron Valves.....	SAE J995	Grade 2

STUDS

Steel Valves.....	ASTM A 193-79a	Grade 2H
Cast Iron Valves.....	AISI 12L 14	Ledloy

CAP SCREWS.....

Cast Iron Valves	SAE J429	Grade 5
------------------	----------	---------

MATERIAL	COMPONENT PARTS	COMPONENT USAGE		
St. Steel C316 St. Steel C420 St. Steel	Seat Rings Seat Rings Seat Rings	6"-12" E Up to 5" E C34, D34	ASTM A743-79 ASTM A743-79 ASTM A276-79a	Grade CF-8 Grade CA-40 AISI 303 & 304
St. Steel St. Steel St. Steel	Discs Discs Discs	Pilot 6" & Up, includes parabolic Up to 5"	ASTM A276-79a ASTM A276-79a ASTMA582-79	AISI 440C AISI 303 & 304 AISI 420F
St. Steel St. Steel	Stems Stems	All Valves & Pilots 750°F E, Bot. GU. VAL.	ASTM A276-79a ASTM A564-79	AISI 303 AISI 630 (17-4)
St. Steel	Diaphragms	All E's & Pilots	ASTM A167	AISI 301

PRESSURE PILOT DIAPHRAGMS

PART NO.	MATERIAL	SIZE	USED ON PILOT TYPE
4-01621-0	Brz.	3 1/2"	W, A88, D2
4-01623-0	St. Stl.	3 1/2"	D, N, Q, A43, A53
4-07890-0	Brz.	3 1/2"	A35, A, A81, SP/P
4-01626-0	St. Stl.	3 1/2"	P13, N4, F13, N24
4-01627-0	Brz.	4 1/2"	A43, A84, A86, A93
4-01629-1	St. Stl.	4 1/2"	P14, P110, Q43, F14
4-01630-0	Brz.	5 3/4"	A53, A5, P95, A85
4-01632-0	St. Stl.	5 3/4"	A92, P15, A54, F15
4-10721-0	Brz.	5 3/4"	D5, A35
4-03927-0	St. Stl.	5 3/4"	Q35, A81, A82
4-01633-0	Brz.	7 1/4"	A73, A70, A75, A87
4-01635-0	St. Stl.	7 1/4"	A73
4-09685-0	Brz.	4 1/2"	D120, A92, D234
4-01659-0	St. Stl.	4 1/2"	A54, F46

PRESSURE PILOT SPRINGS

PART NO.	DELIVERY PRESSURE	SPRING COLOR	WIRE DIAMETER	USED ON PILOT TYPE
5-05007-0	1 - 10	Aluminum	3/16"	D5
5-05007-0	3 - 20	Aluminum	3/16"	D5, N, N33, Q, N20
5-05003-0	5 - 25	Orange	1/4"	D5
5-05016-0	5 - 25	Uncolored	7/32"	D120
5-05003-0	5 - 50	Orange	1/4"	D, N, N33, Q
5-05028-0	10 - 75	Uncolored	5/16"	D120
5-05007-0	10 - 100	Green	5/16"	D, N, N33, Q, N20
5-05012-0	20 - 150	Black	11/32"	D, N, N33, Q, N20
5-04990-0	100 - 300	Uncolored	7/16"	D2, N2, Q2,
5-05030-0	40 - 150	Uncolored	3/8"	D120

TYPE E MAIN VALVE DIAPHRAGMS

Valve SIZE	PART NO.		DIA.
	ST. STL.	BRZ.	
3/8 & 1/2	4-01629-1	4-01627-0	4 1/2
3/4	4-01662-0	4-01660-0	5 1/8
1	4-01632-0	4-01630-0	5 3/4
1 1/4	4-01664-0	4-09678-0	6 1/2
1 1/2	4-01635-0	4-01633-0	7 1/4
2	4-01638-0	4-09679-0	8 1/8
2 1/2	4-01641-0	4-09680-0	9
3	5-02038-0	4-09681-0	10
4	5-01647-0	4-09682-0	13
5	5-01649-0	4-09683-0	15
6	5-01651-0	5-09684-0	17 1/2
8	5-01653-0	--	20
10	4-02096-0	--	25
12	5-01656-0	--	30

THE NUMBER OF E MAIN VALVE DIAPHRAGMS PER SET IS AS FOLLOWS:


Initial Pressure	#Per Set
10 - 250	2
250-400	3
400-600	4

The Number of Diaphragms per set for Pilots varies with the type and delivery pressure. Consult factory.


PILOT ACCESSORIES

THERMOSTAT BULBS


FOR USE WITH T14, T124, T134, T52 PILOTS




STYLE NO. 700 -Plain Bulb with 1" Union Connection.




STYLE NO. 702-Finned Bulb with Wall Mounting Bracket.
For space heating.

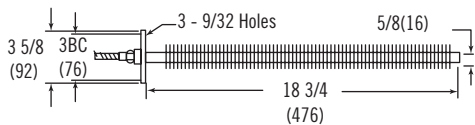


STYLE NO. 703-Finned Bulb with Duct Mounting Flange.
For forced warm air heating.




STYLE NO. 704-Plain Short Bulb with 1-1/4" Union Connection.
For installations where depth is limited.




STYLE NO. 706-Plain Bulb with 1" Union Connection
and 1/4" OD Bendable Extension. Dimension "L" must be specified.




STYLE NO. 708-Plain Bulb with Wall Mounting Bracket.
Used for space heating when dust is a problem.




STYLE NO. 712-Plain Bulb with 1/4" OD Bendable Tubing
Cover for Capillary. Used in open tanks or where a mounting
connection is not required




STYLE 713-Plain Bulb with Duct Mounting Flange.
For forced warm air heating when dust is a problem.




STYLE NO. 701-Large Plain bulb with 1-1/4" Union Connection.
Used on pilots having more than 30 feet of flexible tubing
and with dial thermometer having 20 to 120°F range.



STYLE NO 731-Plain Bulb with Adjustment dimension.
Used in oil storage tanks or wherever it is desirable to change
position of bulb. Dimension "E" must be specified.

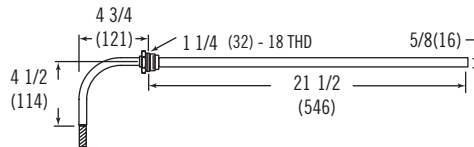


STYLE NO. 740-Sanitary Bulb for Milk Heaters. Threaded to fit standard
No. 23A Thermometer Ferrule. Stainless Steel Bulb and Flexible Tubing.




STYLE NO. 732-Special with 12" hole Extension.


THERMOSTAT WELLS

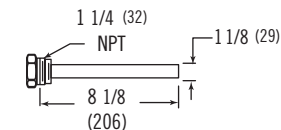

727 WELL - Used with 704 Bulb



728 WELL - Used with 700 and 800 Bulb



729 WELL - Used with 701 and 801 Bulb

PILOT OPTIONS

DIAL THERMOMETER

Any Spence Temperature Pilot can be equipped with a Dial Thermometer. Pilots with Dial Thermometers are available in the 20-120°F, 70-170°F, 120-220°F and 170-270°F ranges.



DIAL THERMOMETER

SPRING CHAMBER

Spence Pressure Pilots can be provided with an enclosed spring chamber.



[illegible]

DIRECT OPERATED VALVES

SERIES 2000 TEMPERATURE REGULATOR

PRESSURES TO 250 PSIG TEMPERATURES TO 406°F



Stainless Steel Disc

is self aligning to assure accurate seating, long wear and tight closure.

Adjusting Key

is conveniently located and always there when settings have to be changed.

Galvanized Iron Union Ends

for sturdiness and ease of installation.

Full Ported and Full Flow Bronze Valve Body

provides maximum capacity for each valve size

Heavy Section Valve Bod

is tough, solid, durable and will with stand severe piping strains for pressures to 250 psig at 406°F

Positionable Temperature Indicator

(indicating regulators only) may be turned in direction of easiest reading. Highly accurate with stainless steel case and bayonet lock ring.

Overtemperature Protection

prevents damage to regulator from inadvertent overheating.

Thermal System

is heavy duty bronze bellows with bronze spiral armored copper capillary, copper bulb and epoxy coated bellows housing. Other line and bulb materials available.

Extra Long Adjustment Spring

permit Adjustment over a wide range of temperatures

Packing Assembly

with spring loaded self adjusting chevron type Teflon packing eliminates the human factor of improper adjustment.

Epoxy Coated Compact Single Piece Channel Frame

permits installation in tight locations.

Full Scale Adjustment

Makes repeat settings easy and accurate

Double Guided Stainless Steel Monolithic Disc Assembly

maintains proper alignment of all moving parts.

Stainless Steel Seat Rings

are threaded and bonded to eliminate any possibility of leakage through seat ring threads

MODEL A AIR ADJUSTMENT PANE

- Bottle Washers
- Steam Tables
- Planting Tanks
- Heating Ducts
- Sterilizers
- Fuel Oil Heaters
- Cooking Vats
- Water Heaters
- Heat Exchangers
- Parts Washers

REVERSE ACTING

- Induction Furnaces
- Industrial Compressors
- Engine Jacket Cooling
- Cooling Ducts
- Liquid Chillers
- Fuel Oil Heaters

THREE WAY ACTING

- Fire Tube Boilers
- Internal Combustion Engine
- Coolers
- Filters

SERIES 2000 TEMPERATURE REGULATOR

SIZES 1/2" TO 2" - CONTROLS 25 TO 40°F



SERIES 2000 TEMPERATURE REGULATOR

APPLICATION DATA

DIRECT ACTING

- Bottle Washing Machinery
- Steam Tables
- Plating Tanks
- Heating Ducts
- Fuel Oil Heaters
- Cooking Vats
- Water Heaters
- Heat Exchangers
- Parts Washer

THREE-WAY MIXING

- Fire Tube Boiler
- Internal Combustion Engine

REVERSE ACTING

- Induction Furnaces
- Industrial Compressors
- Cold Storage Boxes
- Cooling Ducts
- Engine Jacket Cooling
- Liquid Chillers

GAS SERVICE

- Oil Treaters
- Line Heaters
- Separators
- Glycol Dehydrators
- Storage Tanks

VALVE RATINGS

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)
Class 250 NPT	250 (17.2)	400 (204)

Canadian Registration# OC 0591.9C

- Self-actuated
- Two and Three Way Valve Bodies
- Single or Double Seat
- Overtemperature Protection
- Spring Loaded Teflon Chevron Type Packing Assembly
- Double Guided Stainless Steel Monolithic Disc Assembly
- Stainless Steel Seat Rings and Disc
- Adjusting Key Attached
- Full Ported and Full Flow Bronze Body
- Copper Bulb with 8' Armored Capillary

MODELS

- Type 2010 - Single Seat, Direct Acting
- Type 2020 - Single Seat, Reverse Acting
- Type 2030 - Double Seat, Direct Acting
- Type 2040 - Double Seat, Reverse Acting
- Type 2050 - Three-way Mixing and Diverting
- Type 2060 - Gas Service-15 psig maximum. If pressure exceeds 15 psi, a pressure reducing regulator should be used ahead of the temperature regulator.

OPTIONS

- Dial Temperature Gage (Indicating)
- Stainless Steel Bulb
- Stainless Steel Armored Capillary
- Capillary lengths greater than 8'
- Extra Large Bulb
- Union Bushings & Wells

SERIES 2000


TEMPERATURE REGULATOR

SPECIFICATION

The valve shall be self-operated, requiring no external energy source. It shall have single or double stainless steel seats with double guided monolithic disc assembly for proper alignment. The valve shall be direct acting (heating) or reverse acting (cooling) and have two way or three way operation. The packing assembly shall be spring loaded, self adjusting with chevron type Teflon packing. The thermal system line and bulb assembly shall be partially filled with a liquid/gas combination and in a range selected for fast response. The valve rating shall be 250 PSIG at 400°F. Body materials shall be bronze. **MODEL 2060 FOR GAS SERVICE ONLY:** The valve shall be self-operated, requiring no external energy source and designed to control process temperature by regulating gas flow. It shall be normally open and close with increased temperature. "Bubble tight" dead end shutoff shall be provided by Buna-N vulcanized to disc backing. The packing assembly shall be spring loaded, self adjusting with chevron type Teflon packing. The thermal system line and bulb assembly shall be partially filled with a liquid/gas combination and in a range selected for fast response. The valve rating shall be 15 PSIG. Body materials shall be nodular iron.

MATERIALS OF CONSTRUCTION

ITEM	TYPE 2010-2050	TYPE 2060
Body	Bronze ASTM 862 C83600	Ductile Iron ASTM A536 65-45-12
Trim	Stainless Steel	Buna-N
Packing	Teflon	Buna-N
Unions	Iron	Iron
Yoke	Steel	Steel
Cap	Aluminum	Aluminum
Bellows	Bronze	Bronze
Spring	Steel	Steel
Capillary	Copper	Copper
Bulb	Copper	Copper
Armor	Bronze	--
Stem	304 Stainless Steel	304 Stainless Steel
Disc	304 Stainless Steel	Buna-N
Seat	303 Stainless Steel	--




TYPE 2060 GAS SERVICE


TYPE 2060 GAS SERVICE DIMENSIONS INCHES (MM) AND WEIGHTS POUNDS (KG)

SIZE	Dimensions					Shipping Weight (Approx)
	A	B	C	D	Ft	
1/2"	9 3/4	8 1/2	5 5/8	3 1/2	10 Ft.	8
3/4"	(248)	(216)	(143)	(89)	(3 m.)	(3.6)
1"						

* See following pages for standard lengths, ranges, bulb sizes and maximum line lengths.

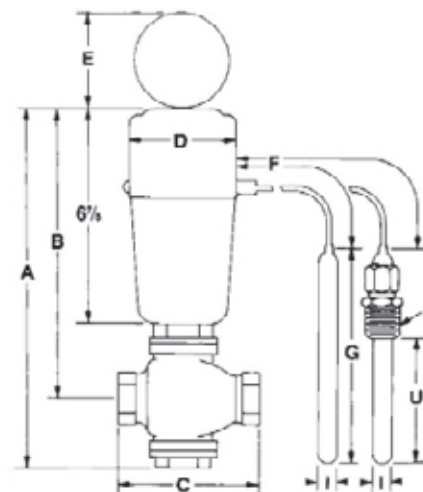

TYPE 2010-2040 DIRECT & REVERSE ACTING

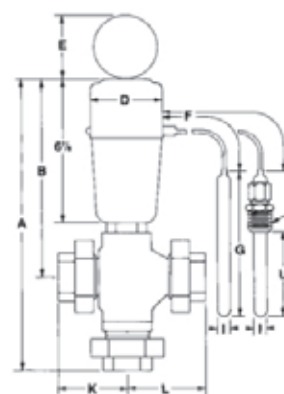

TYPE 2050 THREE WAY

TYPE 2010-2040 DIRECT & REVERSE ACTING DIMENSIONS INCHES (MM) AND WEIGHTS POUNDS (KG)

Valve SIZE	Type no.	Dimensions						Shipping Weight (Approx)
		A	B	C	D	E	Ft	
1/2"(A, B, C, D, E)	2010	9 3/4	8 1/2	5 1/2	3 1/2	2 13/16	8 Ft.	10
1/2, 3/4	2020	(248)	(216)	(140)	(89)	(71)		(4.5)
1/2"	2030	12 7/16	9 3/4	7 3/16	3 1/2	2 13/16	8 Ft.	13
3/4"	2040	(316)	(248)	(182)	(89)	(71)		(5.9)
1"	2010	12 7/16	9 3/4	7 3/16	3 1/2	2 13/16	8 Ft.	13
	2020	(316)	(248)	(182)	(89)	(71)		(5.9)
	2030							
	2040	12 7/8	9 31/32	8 15/16	3 1/2	2 13/16	8 Ft.	20 (9.1)
1 1/4"		(327)	(253)	(227)	(89)	(71)		25 (11)
1 1/2"								30 (14)
2"								

TYPE 2050 THREE WAY DIMENSIONS INCHES (MM) AND WEIGHTS POUNDS (KG)

Valve SIZE	Type no.	Dimensions						Shipping Weight (Approx)
		A	B	Ft	D	E	Ft	
1/2"	13 7/8	9 3/4	3 1/2	8 Ft.	3 5/16	3 5/8		12 (5.5)
3/4"	(352)	(248)	(89)		(84)	(92)		12 (5.5)
1"								13 (5.9)
1 1/4"	14 21/32	9 31/32	3 1/2	8 Ft.	4 1/8	4 11/16	2 13/16	27
1 3/4"	(372)	(253)	(89)		(105)	(119)	(71)	(12)
2"	14 7/8	9 31/32	3 1/2	8 Ft.	4 3/16	4 7/8		33
	(378)	(253)	(89)		(106)	(124)		(15)

SERIES 2000 TEMPERATURE REGULATOR SELECTION

DIRECT & REVERSE ACTING & THREE WAY FLOW AND PRESSURE RATINGS PSIG (BAR)

	Single Seat				Double Seat				Three Way									
SIZE	Type Number		Flow Coefficient C _v	Max. Upstream Pressure	Type Number		Flow Coefficient C _v	Max. Upstream Pressure	Type Number	Flow Coefficient C _v	Max. Difference Between Intet Pressures*							
	Direct	Reverse			Direct	Reverse												
1/2" C	2010	2020	.40	250 (17.2)	NOT AVAILABLE IN DOUBLE SEAT				NOT AVAILABLE IN DOUBLE SEAT									
1/2" D			1.00															
1/2" E			1.80															
1/2" A			3.29	200 (13.8)														
1/2" B			4.29															
1/2" T			5.22									140 (9.7)	2030	2040	7.93	250 (17.2)	2050	5.22
3/4" T			6.85	90 (6.2)	10.4	6.85	90 (6.2)											
1" T			9.15	65 (4.5)	12.9	9.15	65 (4.5)											
1 1/4" T			14.3	40 (2.8)	20.6	14.3	40 (2.8)											
1 1/2" T			15.1	40 (2.8)	24.8	15.1	30 (2.1)											
2" T			17.2	20 (1.4)	33.0	17.2	20 (1.4)											

HOW TO SELECT RANGE & BULB SIZE.....

- Select a temperature range with the control point in the upper half of the temperature range.
- Determine line length required (8' is standard).
- Use line length and temperature range to find correct bulb size in chart at right

EXAMPLE:


Control point: 130°F. Temperature range: 65/140°F. Line length: 15'

SOLUTION:

Bulb size: extra large - G = 15 5/8"


RANGES, BULB SIZES & MAXIMUM LINE LENGTHS

Short Ranges (Gold Spring)		Long Ranges (Silver Spring)		Bulb Size	tMax. Line Length	Maximum Over-Temperature	
°F	°C	°F	°C			°F	°C
-15 to 50	-26 to 10	-15 to 75	-26 to 24	X-Large	40 Ft.	450	232
45 to 115	7.2 to 46	45 to 145	7.2 to 63	X-Large	40 Ft.	450	232
65 to 140	18 to 60	65 to 170	18 to 77	Large	15 Ft.	450	232
				X-Large	40 Ft.		
120 to 200	49 to 93	120 to 230	49 to 110	Small	40 Ft.	300	149
240 to 310	116 to 154	240 to 340	116 to 171	Small	40 Ft.	350	177
280 to 375	138 to 190	280 to 415	138 to 212	Small	40 Ft.	450	232

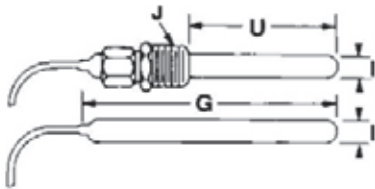

BULB DIMENSIONS* INCHES (MM)

Bulb Sizes	G			U	I			J (NPT)
	Copper	Stain. Stl	Coated		Plain	Union	Well	
Small	13 3/8 (340)	13 1/4 (337)	11 3/8 (289)	10 1/2 (267)	5/8 (16)	5/8 (16)	3/4 (19)	3/4 or 1
Large	15 5/8 (25)	15 1/8 (25)	13 1/4 (337)	12 1/2 (317)	1 (25)	1 (25)	1 1/8 (29)	1
Extra Large	19 (483)	18 5/8 (473)	19 (483)	16 (406)	1 (25)	1 (25)	1 1/8 (29)	1

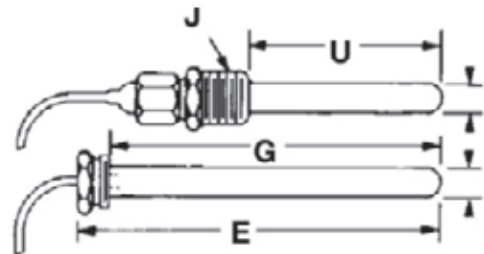


GAS SERVICE BULB & WELL DIMENSIONS INCHES (MM)

E	G	I		U	J (NPT)
		Bulb	Well		
8 1/4 (210)	7 3/8 (187)	25/32 (20)	15/16 (24)	7 11/16 (195)	1

SERIES 2000 TEMPERATURE REGULATOR

CODE SELECTIONS CHART

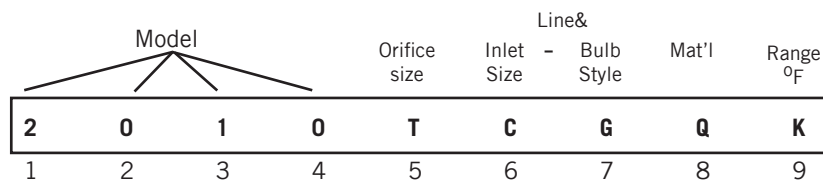

Model -
Position 1, 2, 3 & 4
2010 = Single Seat, Direct Acting
2020 = Single Seat, Reverse Acting
2030 = Double Seat, Direct Acting
2040 = Double Seat, Reverse Acting
2050 = Three Way

Orifice -
Position 5
A
B
C
D
E
T = Standard

Inlet Size
-Position 6
C = 1/2
D = 3/4
E = 1
F = 1 1/4
G = 1 1/2
H = 2
Line & Bulb Style
Position 7
G = Indicating
N = Non-indicating

Material -
Position 8
O = Copper Bz Armor 8'
R = Copper Bz Armor 15'
N = Copper Bz Armor 25'
P = Copper Bz Armor 40'
T = SS Unarmored 8'
V = SS Unarmored 15'
W = SS Unarmored 25'
X = SS Unarmored 40'
Z = Other

Range °F -
Position 9
C = 45/115
D = 45/145
E = 65/140
F = 65/170
J = 120/200
K = 120/230
L = 240/310
M = 240/340
N = 280/375
P = 280/415
Z = Other


+For SS Armored Thermal Assembly Material, add (-TV) at the end of the code (ex.: 2010TC-NTH-TV)

+Small bulb standard for J-1 range and higher.


Extra large bulb standard for D range and lower.

Large bulb standard for E and F range

THERMOWELL

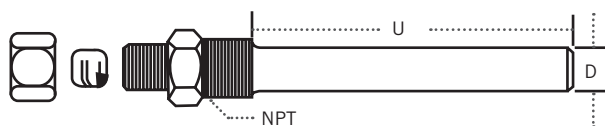

UNION BUSHINGS

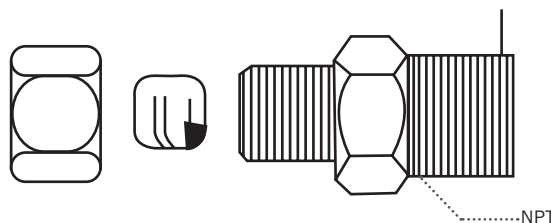

WELLS

Cat. No.	Bulb Size	Material	Inches (mm)			
			Bulb Dia.	NTP	U	Well Dia.
99A	S	Brass	5/8 (16)	3/4 (19)	10 1/2 (267)	3/4 (19)
99B	S	Brass		1 (25)		
99G	S	316 St. St.		3/4 (19)		
99H	S	316 St. St.	1 (25)	1 (25)	12 1/2(318)	1 1/8 (29)
99J	L	Brass			16 (406)	
99K	X	Brass			12 1/2(318)	
99Q	L	316 St. St.			16 (406)	
99R	X	316 St. St.				

UNION BUSHINGS

Cat. No.	Bulb Size	Material	Inches (mm)	
			Bulb Dia.	NTP
98A	S	Brass	5/8 (16)	3/4
98B	S	Brass		1
98C	S	St. St.		3/4
98D	S	St. St.	1 (25)	1
98E	L & X	Brass		1
98F	L & X	St. St.		1

Thermowells and union bushing are utilized as separate items and should be specified on separate line

RATED STEAM CAPACITY TABLE

SERIES 2000 TEMPERATURE REGULATOR

VALVE SIZE		SINGLE SEATED VALVES											DOUBLE SEATED VALVES					
Inlet Pressure PSIG	Outlet Pressure PSIG	1/2 C	1/2 D	1/2 E	1/2 A	1/2 B	1/2	3/4	1	1 1/4	1 1/2	2	1/2	3/4	1	1 1/4	1 1/2	2
		DRY SATURATED STEAM—LBS. OF STEAM/HR																
5	UP to 9" HG. VAC. 6" HG. VAC. 2	12 11 8	30 29 21	53 52 38	97 95 70	130 125 90	155 150 110	200 195 145	270 265 195	420 415 305	450 440 320	510 500 365	235 230 170	305 300 220	380 375 275	610 600 440	735 720 525	975 960 700
10	UP to 3" HG. VAC. 3	15 13 10	35 33 24	65 60 44	120 110 80	160 145 105	195 175 125	255 230 165	340 305 220	530 480 345	565 510 370	635 575 415	295 265 190	385 345 250	480 430 310	765 690 500	920 830 600	1220 1100 800
20	UP to 4 10 15	21 19 15	52 47 37	95 85 66	170 155 120	225 200 155	270 245 190	355 325 250	475 430 335	745 675 525	790 715 555	895 810 630	415 375 290	540 490 380	670 610 470	1070 970 755	1290 1170 910	1720 1550 1200
30	UP to 10 15 25	27 25 17	67 63 42	120 115 75	220 210 140	290 270 180	350 330 220	460 435 290	615 580 385	960 905 605	1020 960 640		530 500 335	695 660 440	865 815 545	1380 1300 870	1660 1570 1050	2210 2090 1390
40	UP to 15 20 30	33 32 25	82 79 63	150 140 115	270 260 210	350 340 270	430 415 330	560 540 435	750 725 580	1170 1130 905			650 625 505	885 820 660	1060 1020 820	1690 1630 1300	2030 1960 1570	2710 2610 2090
50	UP to 20 30 40	39 36 28	97 90 70	175 160 125	320 295 230	415 385 300	505 470 365	665 615 480	890 820 640				770 710 555	1010 935 730	1250 1150 905	2000 1850 1440	2400 2220 1740	3200 2960 2310
60	UP to 25 30 50	45 44 30	112 110 75	200 198 135	370 360 250	480 470 325	585 575 400	770 755 525	1020 1000 700				890 870 605	1160 1140 795	1440 1410 985	2310 2260 1570	2780 2720 1890	3700 3620 2520
70	UP to 30 40 60	51 49 33	127 122 82	230 220 150	420 400 270	545 520 350	665 635 430	870 830 560					1010 965 650	1320 1260 855	1640 1570 1060	2610 2500 1690	3150 3010 2030	4190 4010 2700
80	UP to 35 50 70	57 53 35	140 130 85	255 240 155	465 435 285	610 565 375	740 690 455	975 905 600					1120 1050 690	1470 1370 910	1830 1705 1120	2920 2720 1800	3520 3280 2160	4690 4360 2880
90	UP to 41 60 90	65 57 35	155 140 90	285 255 165	515 465 305	675 610 395	820 740 480	1070 975 630					1240 1120 730	1630 1470 960	2020 1830 1190	3230 2790 1900	3890 3520 2290	5180 4680 3040
100	UP to 46 70 90	70 65 40	170 165 95	310 295 175	565 540 320	740 705 415	900 855 505						1360 1300 770	1790 1700 1010	2220 2110 1250	3540 3380 2000	4260 4060 2400	5680 5410 3200
1 10	UP to 52 70 90	75 70 55	185 175 135	335 315 245	615 575 450	800 750 590	975 910 715						1480 1380 1090	1940 1810 1430	2410 2250 1770	3850 3590 2830	4640 4330 3400	6170 5760 4530
120	UP to 57 80 100	80 75 55	200 185 145	365 330 260	665 605 475	865 790 615	1050 965 750						1600 1460 1140	2100 1920 1490	2600 2380 1850	4160 3800 2960	5010 4580 3560	6670 6090 4740
130	UP to 62 80 110	85 80 60	215 205 150	390 370 270	715 680 495	930 885 645	1130 1080 780						1720 1630 1190	2250 2140 1560	2800 2660 1930	4470 4250 3080	5380 5120 3710	7160 6810 4940
140	UP to 68 90 120	95 85 60	230 215 155	420 390 280	765 715 510	995 930 670	1215 1130 815						1840 1720 1230	2410 2250 1620	2990 2800 2010	4780 4470 3210	5750 5380 3860	7660 7160 5140
150	UP to 72 100 140	100 95 75	245 240 190	445 430 345	815 780 625	1060 1020 820							1960 1880 1510	2570 2470 1980	3180 3060 2460	5090 4900 3930	6120 5890 4730	8150 7840 6290
160	UP to 78 100 140	105 100 65	260 250 165	470 450 300	860 820 550	1120 1070 715							2080 1970 1320	2720 2590 1730	3380 3210 2150	5400 5120 3440	6500 6170 4140	8650 8210 5500
170	UP to 83 100 140	110 105 80	275 270 205	500 485 370	810 885 670	1190 1150 875							2190 2130 1620	2880 2790 2120	3570 3470 2630	5700 5540 4210	6870 6660 5070	9140 8870 6740
180	UP to 89 120 160	115 110 70	290 270 175	525 485 320	960 890 585	1250 1150 760							2310 2140 1400	3030 2800 1840	3760 3480 2290	6010 5550 3650	7240 6690 4400	9640 8900 5850
190	UP to 95 120 160	125 115 85	305 290 215	555 525 390	1010 960 715	1310 1250 930							2430 2310 1720	3190 3030 2260	3960 3760 2800	6320 6000 4470	7610 7220 5380	10100 9610 7160
200	UP to 100 120 180	130 125 75	320 310 185	580 560 335	1060 1020 615	1380 1330 805							2550 2470 1480	3350 3240 1940	4150 4010 2410	6630 6410 3850	7980 7720 4640	10600 10300 6180
210	UP to 105 120 180	135 130 90	335 330 230	605 595 415	1110 1080 755								2670 2620 1820	3500 3430 2380	4350 4260 2960	6940 6800 4720	8360 8190 5680	11100 10900 7560
220	UP to 110 140 200	140 135 80	350 335 195	635 600 355	1160 1100 645								2790 2640 1560	3660 3470 2040	4540 4300 2530	7250 6870 4050	8730 8270 4870	11600 11000 6480
230	UP to 115 140 200	145 140 95	365 355 240	660 635 435	1210 1160 790								2910 2800 1910	3810 3680 2500	4730 4560 3100	7560 7290 4960	9100 8780 5970	12100 11700 7940
240	UP to 120 160 200	155 140 110	380 355 280	690 640 500	1250 1160 915								3030 2810 2200	3970 3690 2890	4930 4570 3580	7870 7300 5720	9470 8790 6890	12600 11700 9170
250	UP to 126 160 220	160 150 100	395 375 250	715 675 455	1300 1240 830								3150 2980 1990	4130 3910 2620	5120 4850 3240	8180 7750 5180	9840 9330 6240	13100 12400 8300

SIZING SERIES 2000 TEMPERATURE REGULATORS

PERFORMANCE VARIABLE

EXAMPLE FOR HEATING SERVICE.....

The maximum anticipated flow requirements for a regulator on heating service is 500 lbs. of steam per hour. The unit steam pressure is 50 psig and the downstream pressure is essentially zero because the steam downstream is discharged into an open drain.

ANSWER: Locate 50 psi on the inlet pressure scale on the left side of the Series 2000 Capacity Chart. Choose the outlet pressure line "up to 20" psig because the downstream pressure is essentially zero. Follow the "up to 20" outlet pressure line until you come to the value closest to 500 lbs. of steam per hour (in this case, 505). Read upward to the valve size and we see that the 1/2" single seated valve is the correct size. To size for three-way valves, use single seated capacities 1/2" through 2" size.

NOTE: FORMULAS FOR EXACT CALCULATIONS.

If the outlet pressure is equal to or less than 53% of the absolute inlet pressure:

$$Q (\text{lbs steam/hr}) = 1.5 \times C_v \times \text{inlet pressure (psia)}$$

If the outlet pressure is greater than 53% of the absolute inlet pressure:

$$Q (\text{lbs steam/hr}) = 3 \times C_v \times \text{pressure drop (psi)} \times \text{outlet pressure (psia)}$$

STEAM FLOW REQUIREMENTS

Use the top chart on this page to determine the pounds of steam per hour required to raise the temperature in tank of known capacity to the required temperature. Determine the rise in temperature (control temp. - room temp.) on the left hand column, read the corresponding pounds of steam per hour under the corresponding gallons of water to be heated. Use the lbs. steam/hr. figure in the chart on the opposite page to determine valve size.

Formula for converting the length, width and depth of solutions (all measured in feet) to gallons of solution:
Gallons=7.48 x length x width x depth.

EXAMPLE FOR COOLING SERVICE

Find the correct regulator valve size that will feed a compressor intercooler that requires 100 gallons of water per minute under maximum operating conditions. The supply (inlet) pressure (P1) is 60 psi and the downstream pressure (P2) under maximum flow conditions is 20 psi. The 20 psi pressure is required to force the full flow of water through the compressor's cooling system. Inlet pressure must not exceed maximum upstream pressure, per the Series 2000 Temperature Regulator Product Pages.

ANSWER: The pressure drop permitted across the regulator is P1 minus P2 (40 psi). In the Water Capacity Table (right), locate 40 psi in the differential pressure column and read across to the required gallons per minute. Read to the highest value (in this case, 130 GPM). The chart indicates that a 1 1/4" double seated valve is required. To size 3-way valve, use single seated capacities 1/2" through 2" size.

30°F span from fully open to fully closed
Oversized valve can provide narrower spans-Consult Factory

STEAM FLOW REQUIREMENTS

Temp. Rise °F	GALLONS OF WATER HEATED PER HOUR										
	25	50	75	100	150	200	300	400	500	750	1000
	LBS. OF STEAM PER HOUR										
10	2	4	6	8	12	17	25	33	42	63	83
20	4	8	12	17	25	33	50	67	83	120	167
30	6	12	19	25	37	50	70	100	120	190	250
40	9	17	25	33	50	66	100	130	170	250	330
50	11	21	31	42	63	84	125	170	210	310	420
60	13	25	37	50	75	100	150	200	250	370	500
80	17	33	50	67	100	130	200	270	330	500	670
100	21	42	63	83	120	170	250	330	420	630	830
120	25	50	75	100	150	200	300	400	500	750	1000
140	29	58	88	117	175	230	350	470	580	880	1170
160	33	66	100	133	200	270	400	530	660	1000	1330

RATED WATER CAPACITY TABLE

PSIG	SINGLE SEATED VALVES						DOUBLE SEATED VALVES					
	1/2	3/4	1	1 1/4	1 1/2	2	1/2	3/4	1	1 1/4	1 1/2	2
Diff. Press	WATER FLOW—U.S. GALLONS PER MINUTE											
5	12	15	20	32	34	38	18	23	29	46	55	74
10	17	22	29	45	48	54	25	33	41	65	78	104
15	20	27	35	55	59	67	31	40	50	80	96	128
20	23	31	41	64	68	77	35	47	58	92	111	148
25	26	34	46	72	76	86	40	52	65	103	124	165
30	29	38	50	78	83		43	57	71	113	136	181
40	33	43	58	90			50	66	82	130	157	209
50	37	48	65				56	74	91	146	175	233
60	40	53	71				61	81	100	160	192	256
70	44	57					66	87	108	172	207	276
80	47	61					71	93	115	184	222	295
90	50	65					75	99	122	195	235	313
100	52						79	104	129	206	248	330
110	55						83	109	135	216	260	346
120	57						87	114	141	226	272	361
130	60						90	119	147	235	283	376
140	62						94	123	153	244	293	390
150							97	127	158	252	304	404
160							100	132	163	261	314	417
170							103	136	168	269	323	430
180							106	140	173	276	333	443
190							109	143	178	284	342	455
200							112	147	182	291	351	467
210							115	151	187	299	359	478
220							118	154	191	306	368	489
230							120	158	196	312	376	500
240							123	161	200	319	384	511
250							125	164	204	326	392	522

TYPE D50

PRESSURE REDUCING VALVE



TYPE D50 DIRECT ACTING PRESSURE REDUCING VALVE

SPRING RANGES.....

3-15	All Sizes	75-140	1/2 - 1 1/4"
10-30	1/2 - 1"	30-100	1 1/2 - 2"
25-80	1/2 - 1 1/4"	10-40	1 1/2 - 2"

PRESSURES TO 300 PSIG AT 420°F

- Direct Acting
- Steam, Water or Gas
- Spherical Seating Surface on Floating
- Stainless Steel Disc for Tight Shutoff
- Four Spring Ranges
- Integral Stainless Steel Strainer
- ANSI/FCI 70 Class IV Shutoff
- Turndown is 5:1

APPLICATION DATA

- Steam Irons
- Autoclaves
- Laundry Mangles
- Single Radiators
- Steam Tables
- Vulcanizers

RATED FLOW COEFFICIENTS (CV)

VALVE SIZE					
1/2	3/4	1	1 1/4	1 1/2	2
2.2	3.3	4.9	5.0	10.1	10.8

OPTIONS.....

- Teflon® Disc for Dead-end Service for Liquid and Gas

Add uniflex Pipe Coupling for ease of maintenance
Consult factory for pricing and availability

VALVE RATINGS.....

Body Material	Pressure PSIG(bar)	Temperature °F(°C)
WITH ST. STL. DISC		
Cast Iron	200 (13.8)	@ 400 (204.4)
Bronze	300 (21.0)	@ 430 (215.6)
Stainless Steel	300 (21.0)	@ 420 (215.6)
WITH TEFLON® DISC		
Cast Iron	300 (21.0)	@ 300 (148.9)
Bronze	200 (13.8)	@ 400 (204.4)

Canadian Registration# OC 0591.9C

TYPE D50


PRESSURE REDUCING VALVE

SPECIFICATION

The valve shall be self operated, requiring no external energy source. The valve shall operate quickly and provide dead end shut off. The body materials and rating shall be cast iron for 200 psig and 400°F, Bronze or Stainless Steel for 300 psi and 420°F. Valve trim material is to be stainless steel. Valve to have a standard aspirator to allow for adjustment of operation

MATERIALS OF CONSTRUCTION

Body, Cast Iron ASTM 126 Cl. B
 Body, Cast Steel ASTM B861-80 UNS C92200
 Body, St. StlASTM 743 CF-BM
 Stem304 St. Stl ASTM 276 Cond. A
 Disc316 St. Stl. ASTM 276 Cond. A
 Seat304 St. Stl ASTM 276 Cond. A
 GasketTeflon
 Diaphragm304 St. Stl ASTM 276 Cond. A
 Spring302 St. Stl.

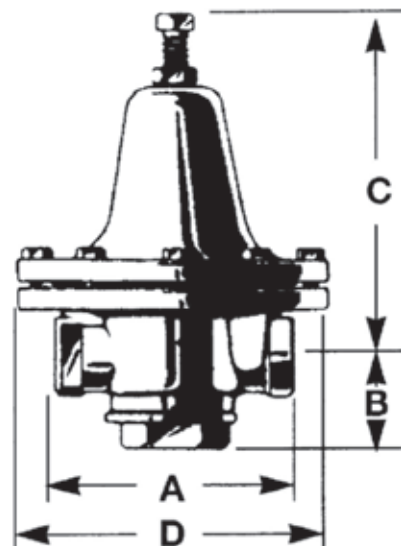

TYPE D50 DIRECT ACTING PRESSURE REDUCING VALVE

SIZING INFO PAGE 138

DIMENSIONS INCHES (MM) AND WEIGHTS POUNDS (KG)

Body Mat'l.	Size	Dimension, Inches				Weight (lbs)
		A	B	C	D	
Cl.& Brz .	1/2, 3/4 (13, 19)	4 5/8 (143)	13/4 (44)	6 7/8 (175)	6 (152)	12 (5.5)
C.I.	1, 1 1/4 (25, 32)	5 5/8 (143)	2 (51)	7 1/4 (184)	7 1/2 (191)	19 (8.6)
C.I	1 1/2, 2 (38, 51)	6 5/8 (143)	2 3/4 (70)	11 1/2 (292)	9 (229)	30 (13.6)
St.Stl	1/2 (13)	5 (127)	1 5/8 (41)	5 1/2 (140)	4 7/8 (124)	8 (3.6)
St. Stl.	3/4, 1 (19, 25)	5 5/8 (143)	2 1/4 (57)	6 1/2 (165)	7 7/16 (191)	22 (10)

TYPE N6

DIFFERENTIAL PRESSURE VALVE



**TYPE N6 DIFFERENTIAL
PRESSURE VALVE**

SIZES 3/4" - 2" PRESSURES to 250 PSIG at 350°F

- Maintains Constant Differential Pressure
- Stainless Steel Valve Trim
- High Temperature Sealing Ring
- Polished Stainless Steel Piston
- ANSI/FCI 70-2 Class IV Shutoff

APPLICATION DATA

- Maintain Pump Discharge Pressure
- Pump Bypass Valve
- Boiler Feedwater Valve

RATED FLOW COEFFICIENTS (CV).....

VALVE SIZE					
3/4	1	1 1/4	1 1/2	2	2 1/2
7.1	13.3	22.0	32.5	51.0	88.0

SPRING RANGES (Differential Pressure, psi)

5-50 100-200
40-125

VALVE RATINGS.....

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)
B16.4 Class 250 NPT	250 (17.2)	@ 350 (176.7)
B16.1 Class 250 Flanged	250 (17.2)	@ 350 (176.7)

Canadian Registration# OC 0591.9C

TYPE N6

DIFFERENTIAL PRESSURE VALVE


SPECIFICATIONS

Valve to maintain pump discharge pressure at a constant differential. Valve to be suitable for 250 psig and 350°F. Body to be of cast iron. Trim to be stainless steel. Spring to be enclosed

to prevent contamination. Adjusting screw shall be protected by cap and to be easily accessible. Piston and disc to be balanced construction.

MATERIALS OF CONSTRUCTION

Body, Cast Iron.....ASTM 126 C.B
Stem303 St. Stl. ASTM 582 Cond. A
Disc420 St. Stl. ASTM 276 Cond.A
Seat Ring.....420 St. Stl. ASTM 276 Cond.A
Piston.....303 St. Stl. ASTM 582 Cond.A
Sealing RingViton
Gasket Graphite
Spring St. Stl. 17- 4

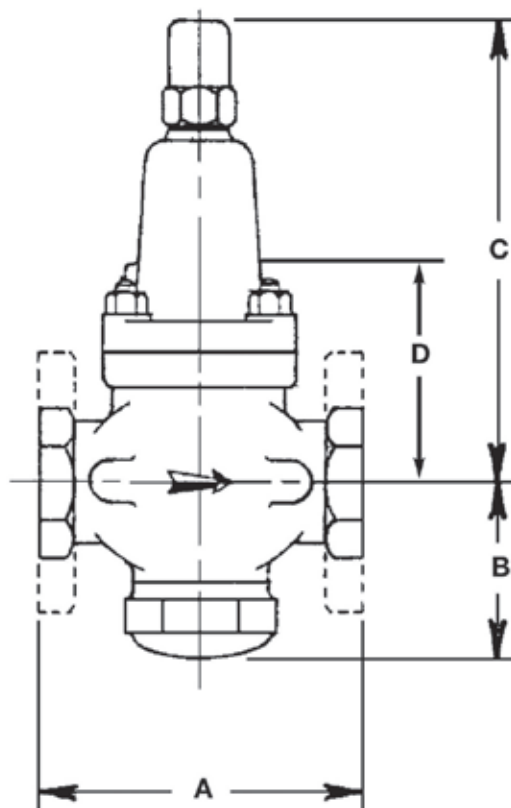

DIMENSIONS inches (mm) AND WEIGHTS pounds (kg)

SIZE	A		B	C	D	APPROX. WT.	
	ANSI NPT	ANSI 250				ANSI NPT	ANSI 250
3/4 (19)	4 3/4 (121)	-- --	2 3/4 (70)	7 1/2 (190)	3 (76)	10 (4.5)	-- --
1 (25)	5 3/8 (137)	-- --	3 (76)	8 1/2 (216)	3 5/8 (92)	12 (5.5)	-- --
1 1/4 (32)	6 1/2 (165)	-- --	3 5/8 (92)	9 3/8 (238)	3 7/8 (98)	19 (8.6)	-- --
1 1/2 (38)	7 1/4 (184)	-- --	3 3/4 (95)	10 7/8 (276)	4 1/4 (108)	26 (12)	-- --
2 (51)	7 1/2 (191)	-- --	4 3/8 (111)	11 7/8 (302)	4 7/8 (124)	39 (18)	-- --
2 1/2 (64)	-- --	10 (254)	4 1/2 (114)	14 3/8 (365)	5 3/8 (136)	-- --	74 (34)

TYPE D & D2

PRESSURE REDUCING VALVE

SIZES 1/4" - 1/2"

PRESSURES TO 600 PSIG AT 750°F

- Self-contained
- Direct Operated
- Normally Open
- Packless Construction
- Accurate Regulation Unaffected by

Service Conditions

- Easy In-line Maintenance
- Five Spring Ranges for Improved Control
- Utilizes Many Standard D/D2 Pilot

Components

MODELS

- **TYPE D VALVE** for ± 1 PSI control of delivery pressure between 3 and 150 PSI
- **TYPE D2 VALVE** for ± 2 PSI control of delivery pressure between 100 and 300 PS

OPTIONS

- Enclosed Spring Chamber
- Adjusting Handwheel
- Composition Disc
- Locking Device
- Wall Bracket

TYPICAL CONFIGURATIONS

PRESSURE REDUCING.....TYPED VALVE

PRESSURE REDUCINGTYPE D2 VALVE

APPLICATION DATA

- Pressure Regulating for Steam Distribution
- Regulating for Fluid, Gas and Vapor Process Control
- Processes with Small, Relatively Steady Flow Rates

SPRING PRESSURE RANGES (PSIG)

	Pressure	Temperature
Construction	PSIG (bar)	°F (°C)
Cast Iron	250 (17.2)	@ 400 (204)
Cast Steel	600 (41.4)	@ 750 (400)



SPRING PRESSURE RANGES (PSIG)

TYPE D	TYPE D2
5-50	100-300
10-100	
20-150	

TYPE D & D2


PRESSURE REDUCING VALVE

SPECIFICATIONS


The Valve shall be of normally open design with packless construction. A strainer Screen shall be built into the valve inlet. The valve shall be single- seated, spring loaded and diaphragm actuated.

MATERIALS OF CONSTRUCTION

Body, Cast IronASTM A126 CI B
 Body, Cast SteelASTM A216 GR. WCB
 Stem..... 303 St. Stl.ASTM A582 COND A
 Disc..... 440 St. Stl.ASTM A276-75 COND A
 Seat..... 420 St.Stl ASTM A276 COND A
 Gasket Non-Asbestos
 Diaphragm..... 301St. Stl. MIL-5-5059C
 Spring..... Inconel

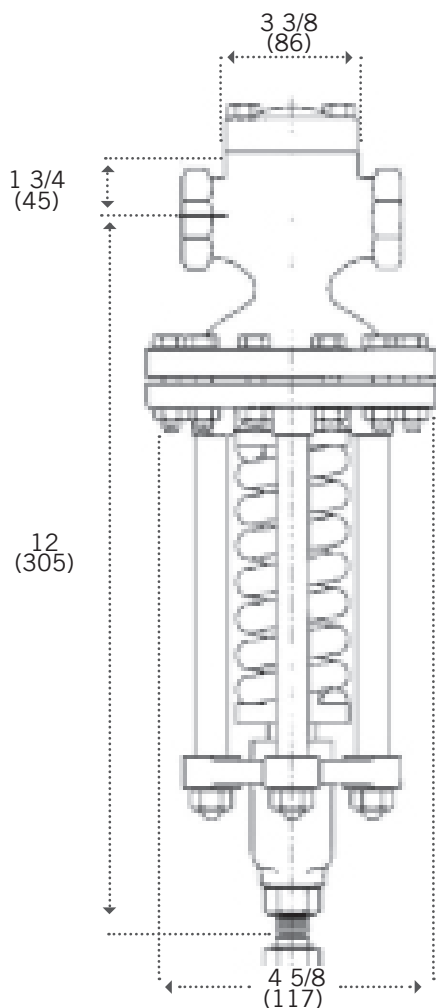

D2 VALVE 10.6 LBS. (4.8 KG)

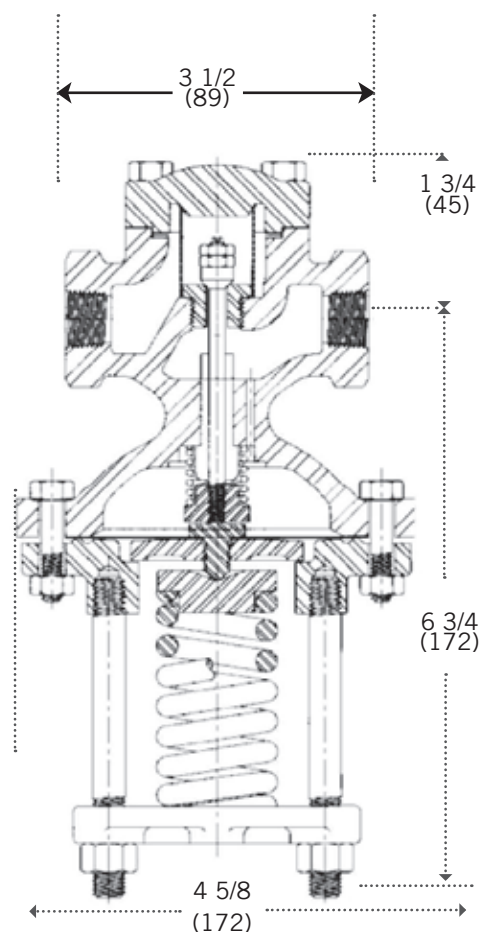

**D VALVE
7.3 LBS. (3.3 KG)**

TYPE D34


WATER PRESSURE REDUCING VALVE

SIZES 1" - 6"
PRESSURES TO 200 PSIG AT 200°F

- Self-contained
- Closes Tight on Dead-end Shutoff
- Fast Acting for Rapid Changes in Flow
- Sediment Settles away from Control Ports when Installed Horizontally
- ANSI/FCI 70-2 Class VI Shutoff

APPLICATION DATA

- Dead-end water service where flow is intermittent and changes rapidly
- Flushometers
- snap cocks

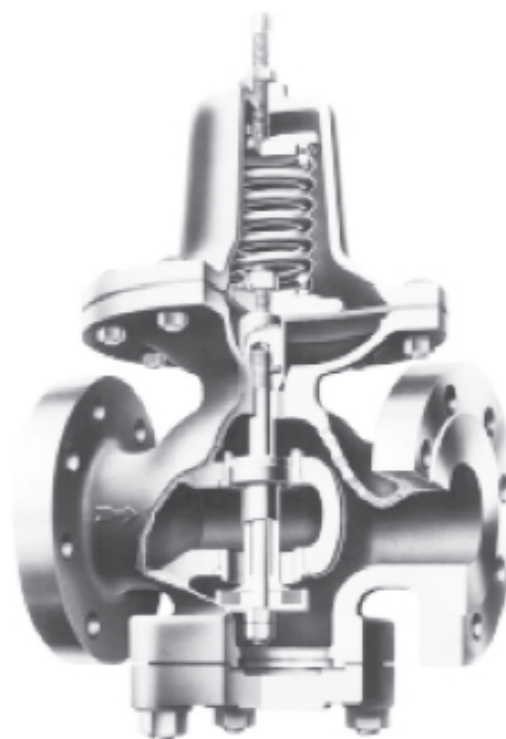

TYPE D34 WATER PRESSURE REDUCING VALVE

VALVE RATINGS

Valve Ends	Pressure	Temperature
ASME/ANSI	PSIG (bar)	°F (°C)

CAST IRON

B16.4 Class 250 NPT	200 (13.8)	@	200 (93)
B16.1 Class 125 Flanged	165 (11.4)	@	200 (93)
B16.1 Class 125 Flanged	200 (13.8)	@	200 (93)

SPRING RANGES (PSI)

10-40	30-80	70-140
-------	-------	--------

Canadian Registration# OC 0591.9C

RATED FLOW COEFFICIENTS (CV)

	VALVE SIZE								
	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6
Cv	5.5	12.5	24	36	53	86	139	196	

TYPE D34

WATER PRESSURE REDUCING VALVE


SPECIFICATIONS

The Valve shall be adjustable, direct operated, packless, diaphragm actuated, balanced and single seated. The valve shall close tight on dead end shutoff and shall maintain a discharge pressure which will not vary more than 1 psig for each 10 psig inlet pressure variation. Delivery pressure variations from zero flow to rated flow shall not exceed 15% of the maximum spring pressure rating. The valve shall be suitable for 200°F service temperature.

Valve body shall be cast iron. Sizes 2-1/2" and larger shall have flanged ends. Trim shall be stainless steel. Valve shall be equipped with a reversible composition disc and diaphragms and discs shall be Nitrile. All working parts shall be easily accessible without removal of valve from the line.

MATERIALS OF CONSTRUCTION

Body, Cast Steel Cast Iron ASTM 126 Cl. B
 Stem 303 St. Stl. ASTM 582 Cond. A
 Disc Nitrile
 Seat 304 St. Stl. ASTM 276 Cond. A
 Gasket Non-Asbestos
 Diaphragm Nitrile
 Spring Steel

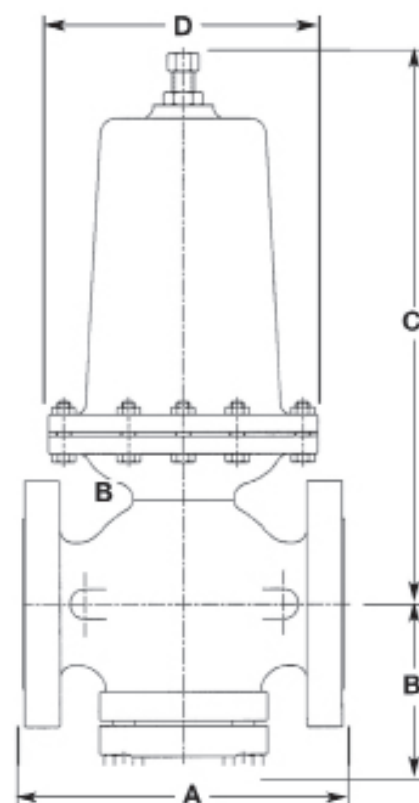


TYPE D34
WATER PRESSURE REDUCING VALVE

DIMENSIONS inches (mm) AND WEIGHTS Pounds (kg)

SIZE	FACE TO FACE			OTHER DIMENSIONS			APPROX. WT		
	A			B	C	D	ANSI NPT	ANSI 125	ANSI 250
	ANSI NPT	ANSI 125	ANSI 250						
1 (25)	5 3/8 (136)	— —	— —	3 3/8 (86)	12 1/8 (308)	5 1/2 (140)	22 (10)	— —	— —
1 1/4 (32)	6 1/2 (165)	— —	— —	3 5/8 (92)	12 1/2 (316)	5 1/2 (140)	24 (11)	— —	— —
1 1/2 (38)	7 1/4 (184)	— —	— —	4 1/4 (108)	13 3/8 (340)	6 (152)	34 (15)	— —	— —
2 (51)	7 1/2 (191)	8 1/2 (216)	9 (228)	4 5/8 (117)	14 3/4 (375)	6 3/4 (171)	44 (20)	51 (23)	57 (26)
2 1/2 (64)	— —	9 3/8 (238)	10 (254)	5 1/2 (140)	18 3/4 (476)	8 (203)	— —	78 (35)	89 (40)
3 (76)	— —	10 (254)	10 3/4 (273)	6 (152)	21 3/4 (552)	9 (229)	— —	108 (49)	128 (58)
4 (102)	— —	11 7/8 (302)	12 1/2 (318)	6 5/8 (168)	26 5/8 (676)	11 1/4 (283)	— —	198 (90)	225 (102)
5 (127)	— —	13 5/8 (346)	14 1/2 (268)	7 5/8 (194)	33 1/8 (841)	14 1/4 (362)	— —	352 (160)	394 (252)
6 (152)	— —	15 1/8 (384)	16 (406)	9 1/8 (232)	35 7/8 (911)	16 (406)	— —	500 (227)	550 (250)

TYPE D36

WATER PRESSURE REDUCING VALVE

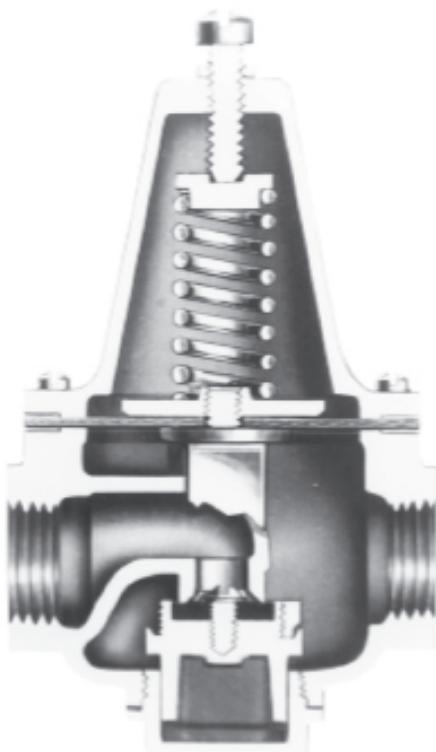

**TYPE D36 WATER PRESSURE
REDUCING VALVE**

SIZING INFO PAGE 136

VALVE RATINGS

Valve Ends
AMSF/ANSI Pressure PSIG(bar) Temperature °F(°C)

CAST BRONZE

B16.15 Class 250 NPT 300 (21.0) @ 160 (71)

SPRING RANGES (psi).....

10-35 75-100
25-75

Canadian Registration# OC 0591.9C

SIZES 1/2" - 2"

PRESSURES to 300 PSIG at 160°F

- High Capacity
- Sensitive Spring and Large Diaphragm
- Area for Accurate Pressure Control
- Renewable Stainless Steel Single Seat
- Watertight Cage Assembly
- Soft Seat for Tight Shutoff
- Quiet Operation due to Opening in Direction of Flow
- ANSI/FCI 70-2 Class VI Shutoff

APPLICATION DATA

- Liquid pressure reduction in industrial and commercial applications

OPTIONS.....

- Strainer and nipple

RATED FLOW COEFFICIENTS (CV)

VALVE SIZE					
1/2	3/4	1	1 1/4	1 1/2	2
4.6	6.0	8.7	12.2	16.7	34.0

TYPE D36


WATER PRESSURE REDUCING VALVE

SPECIFICATIONS

Valve shall be self operated requiring no external energy source. Valve shall have a bronze body and stainless steel renewable seat. Diaphragm shall be suitable for water service. Valve rated to 300 psi at 160°F. Disc to be removable without disassembly of the valve.

MATERIALS OF CONSTRUCTION

Body Lead-Free Bronze ASTM B61-80 UNS C92200
 Stem Bronze ASTM B61-80 UNS C92200
 Disc Buna N
 Seat 304 St. Stl. ASTM 276 Cond. A
 Gasket Nylatron-GS
 Diaphragm Buna N
 Spring 302 St. Stl.

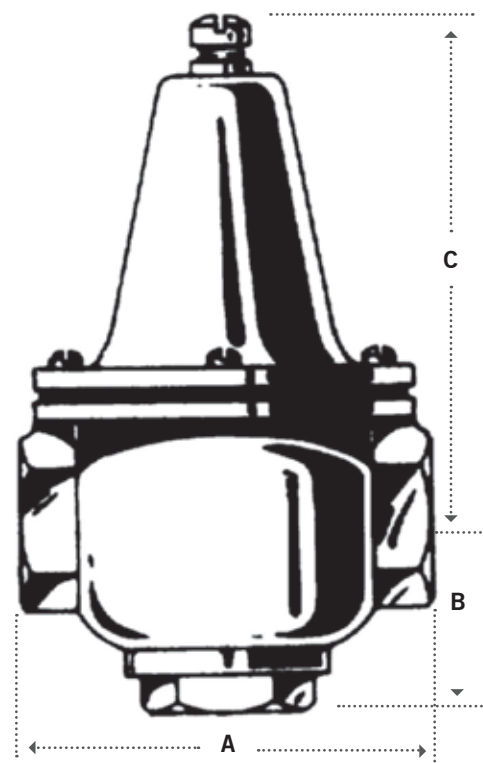

TYPE D36
WATER PRESSURE REDUCING VALVE

DIMENSIONS inches (mm) AND WEIGHTS Pounds (kg)

SIZE	Dimensions, Inches			WEIGHT (IBS.)
	A	B	C	
1/2 (13)	4 1/4 (108)	2 (51)	6 1/4 (159)	5.25 (2.4)
3/4 (19)	4 1/4 (108)	2 (51)	6 1/4 (159)	5.25 (2.4)
1 (25)	4 3/4 (184)	2 1/8 (54)	6 1/2 (165)	8 (3.5)
1 1/4 (32)	5 (127)	2 3/4 (216)	6 3/4 (228)	10 (4.4)
1 1/2 (38)	6 3/4 (171)	2 3/4 (238)	9 7/8 (251)	20 (9.1)
2 (51)	8 (203)	3 1/4 (83)	10 3/4 (273)	33 (15)

[illegible]

[illegible]

REGULATOR SIZING

DEFINITIONS RELATING TO REGULATOR CAPACITY

The capacities contained in this bulletin are based on a specific level of performance by the regulator. The measure of performance is accuracy of regulation, also known as offset or deviation. Each table is appended with a footnote indicating the accuracy of regulation obtainable at the rated capacities listed.

Pertinent terms involved in the determination of accuracy of regulation and rated capacity are defined as follows:

- **CONTROLLED VARIABLE** is the variable which shall be monitored by the controlling process. This variable is either the outlet pressure or the differential pressure.
- **MINIMUM CONTROLLED FLOW** is the lowest flow rate, at a given set point and temperature, at which a steady regulated condition of the controlled variable can be maintained. For some regulators, minimum controllable flow is essentially zero. It is used to determine turndown or rangeability.
- **SET POINT** is the regulator adjustment corresponding to the desired value of the controlled variable.

• **RATED CAPACITY** is the rate of flow obtainable through a regulator, for specified inlet and outlet conditions and fluid, as a specified offset or accuracy of regulation.


• **ACCURACY OF REGULATION** is the deviation from the set point, expressed as a percentage or as a fixed unit, taken at the test conditions.

• **LOCK-UP** or dead-end shutoff, is the deviation of the controlled variable from set point obtained at a no-flow condition.

• **Adapted** from "PRESSURE REDUCING REGULATOR CAPACITY" Standard No. ANSI/FCI 99-2, published by Fluid Controls Institute, Inc

TYPICAL REGULATION CURVE

The performance characteristic of a Spence Pressure Regulator is shown above. Using this curve to illustrate several terms of reference, the following facts are evident:

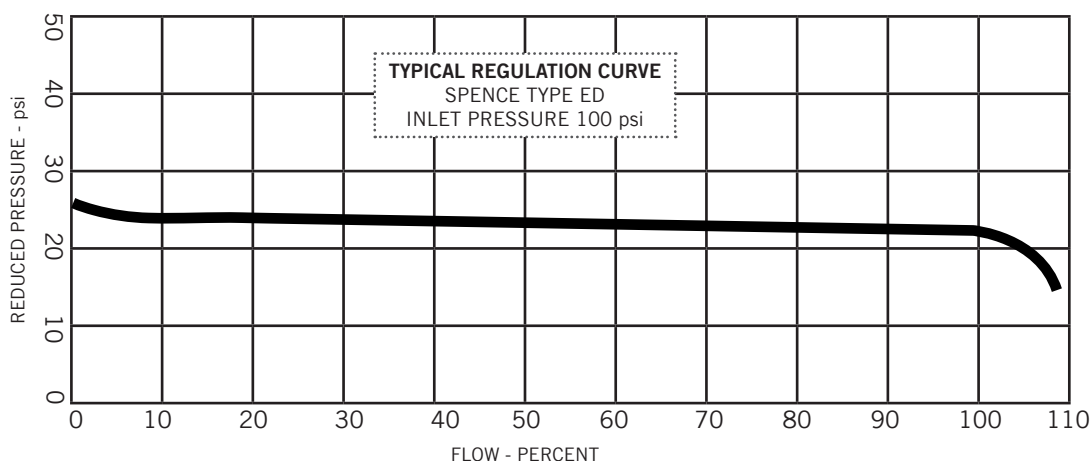

REGULATED VARIABLE

Minimum Controlled Flow	4%
Set Point	25.0
Reduced Pressure at Rated (100%) Flow	22.5 psi
Accuracy of Regulation, psi	2.5 psi
Accuracy of Regulation, % of set pressure	10%

REDUCED PRESSURE

Downstream pipe size should be enlarged at regulator outlet to approximately equalize pipe velocities before and after the reduction. The Steam Capacity Tables are useful for determining steam pipe sizes and regulator size at any desired lower velocity level.

The slight slope of the curve establishes a definite relationship between flow and regulated pressure. Note that 1 psi accuracy of regulation is obtainable at 95% of rated flow.

For back pressure regulation, or differential where the regulator opens on increasing differential, the characteristic curve would lie opposite to that shown. It would slope upward with flow increase because a positive deviation is required to cancel valve opening.

NOTES ON USE OF TABLES

The lowest reduced pressures are approximate critical pressures. No appreciable increase in flow can be obtained at lower pressures.

Reduced Seats—Spence Regulators are available with a choice of seat sizes called Full and Normal Ports. There is a capacity table for each port with standard plugs. The Cv Valve Coefficients shown on the back page, indicate where 75% and 50% parabolic plugs are available. For a given pressure drop, rated flows with various ports and plugs in the same size body may be compared. Thus, valve and port size may be selected to limit velocities entering and leaving the regulator. Lower velocities mean a greater proportion of the pressure drop occurs at the valve seat, where it belongs, rather than in the body outlet and connected piping.

Capacity ratings apply to Spence Regulators with Type D, N and Q Pilots which are spring loaded and have 3^{1/2} inch diaphragms. Other pilots having greater or lesser sensitivity will provide proportionally greater or less accuracy of regulation.

PLANNING MAIN VALVE INSTALLATION

A. PLANNING THE INSTALLATION

1. Locate the valve in a straight run of horizontal pipe. See Fig 1.
2. Allow headroom above the valve for access through the blind flange. Provide clearance for stem withdrawal underneath.
3. Prevent water hammer and erratic operation by installing traps to provide proper drainage before and after the valve, and before secondary PRV or control valve.
4. Avoid damaging affects of scale and did in pipe lines by using a strainer as shown in Fig. 1 .
5. Provide a 3-valve by-pass to facilitate inspection without interrupting service.
6. To eliminate excessive noise and erratic regulation with steam and other compressible fluids enlarge the delivery pipe size to effect a reasonable flow velocity at the reduced pressure. A tapered transition is recommended. If possible, avoid a sharp turn close to the regulator outlet and a bull-headed tee connection to the low pressure main.
7. Install initial and delivery pressure gauges to indicate performance. If the pressure rating of the delivery system or connected equipment is less than the initial steam pressure, provide a safety valve.

B. CONTROL PIPE

1. Use 1/4" pipe for this line which connects the pilot diaphragm chamber to the desired point of pressure control. See Fig. 1.
2. Take the control at a point of minimum turbulence. Avoid control immediately at the valve outlet or after a turn. When the delivery pipe expands in size select a spot at least 4 pipe diameters beyond the point of enlargement.
3. Pitch away from pilot to avoid erratic operation and fouling. Eliminate water pockets.
4. Locate delivery pressure gauge in control pipe to show. pressure actually reaching pilot diaphragm.


- | | |
|--------------------|------------------------|
| 1. Inlet Pipe | 8. SRV Type |
| 2. Isolation Valve | 9. Drip Pan Elbow |
| 3. Strainer | 10. Vent Stack |
| 4. PRV Type | 11. Low Pressure Trap |
| 5. Bypass Pipe | 12. High Pressure Trap |
| 6. Bypass Valve | |
| 7. Delivery Pipe | |

Provide as much straight run of pipe on both sides of regulator as possible:

- 10 pipe diameters minimum to the inlet.
- 20 pipe diameters minimum of expanded line size from the outlet.

C. DESIGN GUIDELINES TO MINIMIZE NOISE

1. Size the regulator to provide a maximum inlet velocity of about 10,000 FPM.
2. Determine the regulator outlet velocity. if it would exceed 30,000 FPM, use a Spence muffling orifice or a second stage regulator.
3. Expand regulator outlet piping to limit discharge line velocity to about 10,000 FPM.
4. Avoid abrupt changes in pipe size. Limit pipe diameter changes to two pipe sizes per stage of expansion. Do not use eccentric reducers.
5. Directional changes in downstream piping should be made only after the line size has been increased. Use long radius fittings; avoid bull-head tee connection.
6. Provide as much straight run of pipe on both sides of regulator as possible:
 - a - 10 pipe diameters minimum to the inlet.
 - b - 20 pipe diameters minimum of expanded line size from the outlet.
7. Size all piping components, including strainer and stop valves for a maximum flow velocity of about 10,000 FPM (Exception: An outlet stop valve mounted at the regulator outlet should be equal in size to the regulator). In areas where low sound levels are specified, reduce this limit by 25% to 50%.
8. To limit noise transmission through the building's structure. keep the regulator and piping at least 3 feet away from solid surfaces. Use sound-isolating piping supports.
9. Apply high density insulation to the regulator body, piping and system components. Insulation reduces heat loss significantly and can provide moderate (3-6 dB) local noise attenuation.
10. Use a Spence noise suppressor to reduce the propagation of noise via the downstream piping

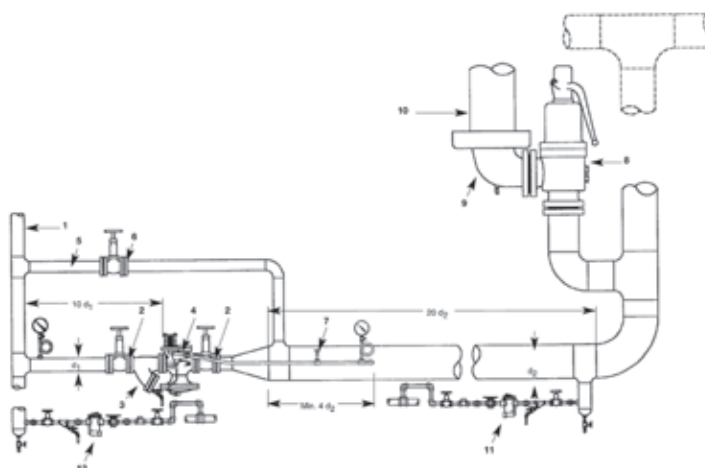

RULES FOR MAIN VALVE SELECTION

When you select a Main Valve, your sizing can be based on one of three methods. They are:

ECONOMICAL MAIN VALVE Economical Main Valve Selection is choosing a regulator that has the line size and rough capacity to handle the load. No consideration is given to velocities or noise. If you are interested in an economical selection, select a regulator type for your application, then go to the Capacity Tables and select the size that will provide you with the capacity needed.

ENGINEERED MAIN VALVE Engineered Main Valve Selection takes into consideration the inlet and outlet velocities of the regulator. It will limit these velocities to acceptable standards. See Pressure Reducing Station Design Guidelines on the following pages for details. If you are interested in an engineered selection, select a regulator

type for your application, and then to the Capacity Tables and select the size that will provide you with the capacity needed. Verify that the velocities fall within the guidelines by consulting the Velocity Charts in this Section.

ENGINEERED MAIN VALVE WITH NOISE SUPPRESSION Engineered Main Valve Selection with Noise Suppression considers both velocity and noise suppression in the selection of the regulator. For this selection, it is recommended that you contact your local Spence Technical Sales Representative who can provide you with a computer generated solution.

SELECTING A REGULATOR TYPE The following rules should be used to help you to determine the type of regulator that you should use. You should consult the Product Pages, Velocity Tables and Capacity Tables for additional information on your selection.

RULES FOR MAIN VALVE SELECTION—STEAM SERVICE

Together with the following rules, reference should be made to the Main Valve Specification Table or individual Product Pages for maximum initial pressures and temperatures and “minimum differentials” for the several types of Main Valve. For pressure reduction where fast response time is important, but capacity and accuracy are not critical, select **D50 DIRECT OPERATED REGULATOR**.

EITHER DEAD-END OR CONTINUOUS FLOW SERVICE

RULE 1. For Initial Pressures exceeding 15 psi:

(a) TYPE E - Select when the Delivery Pressure is less than 75% of Initial Pressure. For Differential Pressures of 15-50 psi, specify optional LP Spring (10 psi minimum Differential

Pressure is attainable by adding optional fittings).

(b) TYPE E5 - Select when the Delivery Pressure is 75% to 96% of Initial Pressure.

RULE 2. For Initial Pressures less than 15 psi:

(a) TYPE E2 - Select when Initial Pressure is less than 15 psi.

RULES FOR MAIN VALVE SELECTION AIR SERVICE

Together with the following rules, reference should be made to the Main Valve Specification Table or individual Product Pages for maximum initial pressures and temperatures and “minimum differentials” for the several types of Main Valve. For pressure reduction where fast response time is important, but capacity and accuracy are not critical, select **D50 DIRECT OPERATED REGULATOR**.

EITHER DEAD-END OR CONTINUOUS FLOW SERVICE

RULE 1. For Initial Pressures exceeding 15 psi:

(a) TYPE E - Select when the Delivery Pressure is less than 75% of Initial Pressure. For Differential Pressures of 15-50 psi, specify optional LP Spring (10 psi minimum Differential Pressure is attainable by adding optional fittings).

(b) TYPE E6 Select when the Delivery Pressure is 75% to 93% of Initial Pressure.

(c) TYPE E5 Select when the Delivery Pressure is 93% to 96% of Initial Pressure.

RULE 2. For Initial Pressures less than 15 psi:

(a) TYPE E2 Select when Initial Pressure is less than 15 psi.

RULES FOR MAIN VALVE SELECTION - WATER SERVICE

Pilot Operated Regulators are not uniformly successful in liquid pressure reducing service unless the delivery system has unusual cushioning such as afforded by an elevated tank or large air chamber.

WATER PRESSURE REDUCING VALVES

The TYPE D34 DIRECT OPERATED VALVE was developed for application on rapidly changing and intermittent flow to an inflexible system.

RULE 1. Select TYPE D34 DIRECT OPERATED VALVE for pressure reducing service.

FOR PILOT OPERATED WATER REGULATORS When a pilot operated regulator is required the following rules for the selection of a main valve govern:

RULE 2. When pressure drop across valve exceeds 10 psi: (a)

TYPE C34 -Select for all normal requirements.

(b) TYPE E6 with Dashpot-Select where high lift is desired or special flow requirements encountered.

RULE 3. When pressure drop across valve is between 5 and 10 psi:

(a) TYPE E5 Select for pressure drops not less than 5 psi.

(b) TYPE E6 with Dashpot-Select if auxiliary operation is possible.

Together with the above rules, reference should be made to the Main Valve Specification Table for maximum initial pressures and temperatures and “minimum differentials” for the several types of Main Valves.

VALVE SIZING BY COMPUTATION

FORMULA KEY

A = Area of Pipe in (inches) ²	ΔPs = P ₁ - P _v when P ₂ > P _v
C _v = Valve Coefficient	ΔPs = P ₁ - (.96 - .28√ $\frac{P_v}{P_c}$)P _v when P ₂ < P _v
EDR = Equivalent Direct Radiation (Sq. Ft.)	q = Liquid Flow Rate, U.S. gpm
F = Pipe Area Factor (see Pipe Factors Table)	Q = Flow Rate, SCFH
ft = Feet	T = Absolute T (T + 460)°R
G = Specific Gravity	T _{SH} = Steam Superheat (°F) =
ΔP = Pressure Drop, P ₁ - P ₂ psi	Total Steam Temp. - Saturated Steam Temp.
P ₁ = Inlet Pressure, psia (psi + 14.7)	$\bar{v}$ = Specific Volume Ft ³ /#
P ₂ = Reduced Pressure, psia (psi + 14.7)	V = Velocity, FPM
PC = Pressure at Thermodynamic Critical Point, psia (water = 3206 psia)	W = Steam Flow, #/Hr.
P _v = Vapor Pressure, psia	Ws = Flow, #/Hr. Superheated Steam

To avoid interpolation or solve problems beyond the scope of the table, valve sizes may be determined by calculation as follows:

	C_v		LOADS
	SUBCRITICAL	CRITICAL	
SATURATED STEAM:	$C_v = \frac{w}{2.1 \sqrt{\Delta P (P_1 + P_2)}} \quad P_2 > .58 P_1$	$C_v = \frac{w}{1.71 P_1} \quad P_2 \leq .58 P_1$	WATER $W = \frac{\text{GPM}}{2} \times \text{Temp. Rise (°F)}$
SUPERHEATED STEAM:	$C_v = \frac{W (1 + .0007 T_{sh})}{2.1 \sqrt{\Delta P (P_1 + P_2)}} \quad P_2 > .55 P_1$	$C_v = \frac{w (1 + .0007 T_{sh})}{1.75 P_1} \quad P_2 \leq .55 P_1$	FUEL OIL $W = \frac{\text{GPM}}{4} \times \text{Temp. Rise (°F)}$
GAS:	$C_v = \frac{Q}{963} \frac{P_2 > .5 P_1}{\sqrt{\Delta P (P_1 + P_2)}} \quad \frac{GT}{\sqrt{\Delta P (P_1 + P_2)}}$	$C_v = \frac{Q \sqrt{GT}}{834 P_1} \quad P_2 \leq .5 P_1$	AIR $W = \frac{\text{CFM}}{900} \times \text{Temp. Rise (°F)}$
LIQUID:	$C_v = \frac{P_2 > .P_1 - .85 \Delta P_s}{q \sqrt{\frac{G}{\Delta P}}} \quad P_2 > .P_1 - .85 \Delta P_s$	$C_v = \frac{P_2 \leq .P_1 - .85 \Delta P_s}{.93 q \sqrt{\frac{G}{\Delta P_s}}} \quad P_2 \leq .P_1 - .85 \Delta P_s$	RADIATION $W = \frac{f^2 \text{EDR}}{4}$
			ABSORPTION $W = 16-20 \text{ \#/Hr./Ton-Hr.}$
			STM.ATOM $W = 0.1 \text{ \#/Hr./\#Oil}$

	FLOW
STEAM	$W = \frac{.0433 \times V \times F}{\bar{v}}$
AIR & GASES	$Q = \frac{.0259 \times V \times F \times P_1}{T}$
LIQUIDS	$q = .0054 \times V \times F$

VELOCITY
STEAM $V = 2.4 - A$

PIPE FACTORS FOR STANDARD (SCHEDULE 40) PIPE			
SIZE	FACTOR	SIZE	FACTOR
1/8	.55	3 1/2	95
1/4	1.0	4	122
3/8	1.8	5	192
1/2	2.9	6	278
3/4	5.1	8	481
1	8.3	10	758
1 1/4	14	12	1076
1 1/2	20	14	1301
2	32	16	1699
2 1/2	46	18	2151
3	71	20	2673

PRESSURE REDUCING STATION DESIGN GUIDELINES

I. SINGLE STAGE PRESSURE REGULATOR

1. When to use single stage regulator:
 - A. When load turndown requirement is generally no greater than 10:1.
 - B. When ratio of specific volume of steam, outlet to inlet, is no greater than 3 to 1.
 - C. When only one reduced steam pressure level is required.

II. PARALLEL PRESSURE REGULATORS

1. When to use parallel pressure regulator stations:
 - A. When maximum specified capacity requires selection of a pressure regulator greater than 12 inch pipe size. (It may be more economical to install two smaller valves than one very large one.)
 - B. When normal conditions require operation at 10% or less of specified maximum capacity for sustained periods.
 - C. When there are two distinct load requirements; i.e., summer winter operation
2. When to use a pneumatically operated parallel pressure regulator station:
 - A. When the combined accuracy of regulation of mechanically operated controls is unacceptable.

For Spence mechanically operated regulators normal sizing selection results in accuracy of regulation of approximately 5% of set pressure. Combined accuracy of regulation of mechanically operated parallel installed regulators is approximately 10% of set pressure.

Pneumatically operated regulators equipped with reset maintain set point within 1% for all sustained flows.

III. TWO STAGE PRESSURE REGULATORS†

1. When to use two stage pressure regulator stations:

† Primary PRV requires optional base bypass and 1/8" bleed port

- A. When intermediate steam pressure is required.
- B. When concerned with PRV generated noise, use two stage station when specific volume ratio, outlet to inlet, is greater than 3 to 1, unless manufacturer offers assurance or other means of meeting noise specification.
- C. When complying with Power Piping Code ANSI B31.1-1986, which reads, in part, "in district heating and steam distribution systems where the steam pressure does not exceed 400 psi (2758 kPa) and where the use of relief valves and vent piping are not feasible, two or more pressure reducing valves may be installed in series, each set at or below the safe working pressure of equipment served and no relief valve is required."

IV. TWO STAGE

PARALLEL PRESSURE REGULATORS†

1. Whenever any condition from II and any condition from III applies.

SPACE CONSIDERATIONS FOR REDUCING STATIONS

1. Following are rules of thumb for approximating space requirements for installing reducing stations:
 - A. Single stage (with or without noise suppressors) Inlet side: ten (10) diameters of PRV pipe size Outlet side: twenty (20) diameters of final pipe size, where final pipe size is determined on the basis of 10,000 fpm line velocity.
 - B. Two stage Inlet side of primary: ten (10) diameters of PRV pipe size. Intermediate: twenty (20) diameters of secondary PRV pipe size. Outlet side: twenty (20) diameters of final pipe size, where final pipe size is determined on the basis of 10,000 fpm line velocity.
 - C. Two stage with muffling orifice; same as A above.

PRESSURE REDUCING STATION GENERAL SPECIFICATION

- A. Pressure Reducing Station shall consist of:

- pressure regulator
- inlet strainer
- inlet and outlet stop valves (gate type)
- by-pass valve (globe type)
- trap at inlet to pressure regulator
- pressure gauges on inlet and outlet of station
- pressure relief valve downstream of regulator

- B. Stop valves and strainer shall be at least pressure regulator size

- C. Expand pressure regulator outlet pipe size to obtain discharge line velocity which will not exceed:

Up to and including 2"	15,000 FPM
2 1/2" up to 8"	10,000 FPM
Above 8"	8,000 FPM

Regulator outlet velocity shall be limited to:

Up to and including 2"	45,000 FPM
2 1/2" up to 8"	30,000 FPM
Above 8"	24,000 FPM

- D. Unions shall be used on either side of screwed end by-pass valve and pressure regulator to facilitate removal.
- E. Pressure regulators 2-1/2" and larger shall have flanged ends and be suitable for pressure and temperature specified.
- F. Limit pressure regulator inlet velocity to:

Up to and including 2"	15,000 FPM
2 1/2" thru 8"	10,000 FPM
Above 8"	8,000 FPM
- G. Regulator sound pressure level while operating at specified maximum capacity shall not exceed 90 dbA as measured at a point three feet downstream and three feet from uninsulated pipe surface.
- H. Pressure regulator capacity shall not be greater than 120 of specified maximum capacity.
- I. For details of safety valve sizing and installation, please refer to the latest National Board Inspection Code and ANSI B31.1 Code.

REGULATOR CV DATA

Valve Size	E							E5,E6		C34	D	D34	D50	N6	Series 2000
	NORMAL 50%	NORMAL 50%	NORMAL	FULL 50%	FULL 70%	FULL		NORMAL	FULL						
1/4	-	-	-	-	-	-	-	-	-	-	.25	-	-	-	-
3/8	-	-	.66	-	-	1.5	-	-	-	-	.32	-	-	-	-
1/2	-	-	1.55	1.7	2.2	2.8	-	-	-	-	.32	-	2.2	-	.4-5.22
3/4	-	-	4.8	2.6	4.2	5.4	7.6	5.7	7.6	-	-	-	3.3	7.1	6.85
1	-	-	7.5	6.3	7.2	8.8	11.7	10.0	11.7	5.5	-	5.5	4.9	13.3	9.15
1 1/4	-	-	10.4	7.4	11.1	14.1	18.9	13.4	18.9	12.5	-	12.5	5.0	22	14.3
1 1/2	-	-	14.6	11.3	15.9	19.8	27.4	19.8	27.4	17.3	-	17.3	10.1	32.5	15.1
2	-	-	17.6	17.7	22.9	31	44	25	43	24	-	24	10.8	51	17.2
2 1/2	14	18	24	25	27	44	68	35	67	36	-	36	-	88	-
3	26	34	43	42	56	74	96	59	95	53	-	53	-	-	-
4	46	62	78	65	88	109	143	120	159	86	-	86	-	-	-
5	65	89	115	94	136	169	202	176	258	139	-	139	-	-	-
6	83	110	151	139	188	248	255	228	350	196	-	196	-	-	-
8	139	187	249	252	353	444	462	366	665	-	-	-	-	-	-
10	230	294	377	400	558	706	748	525	1018	-	-	-	-	-	-
12	363	463	631	631	880	1113	1118	952	1611	-	-	-	-	-	-

75% AND 50% REDUCED TRIM (Parabolic)

The Parabolic Discs given in the above table are designed to:

- Improve performance at minimum flows by improving stability over wide flow ranges.
- Provide easy field conversion to obtain a substantial increase or decrease in regulator Cv to meet system load requirements.
- Facilitate selection of smaller size safety relief valves.
- Size more precisely to the required Cv, thereby eliminating one of the most frequent causes of poor performance.

SATURATED STEAM FLOW TABLE (LB/HR)

BASED ON SCHEDULE 40 PIPE

SIZES 1/4" THROUGH 2"

VEL., FPM	45000	45000	45000	45000	45000	45000	45000	45000
PRESS. (PSIG)	REGULATOR or PIPE SIZE (inches)							
	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
-10	23	43	68	120	195	337	458	755
-5	51	93	148	260	422	730	994	1638
0	73	134	213	373	605	1046	1424	2348
5	97	178	284	498	807	1396	1900	3132
10	120	220	350	613	994	1720	2342	3860
15	142	260	415	728	1179	2041	2778	4579
20	164	301	479	841	1363	2359	3210	5292
25	186	341	543	953	1545	2673	3639	5998
30	208	381	607	1065	1726	2987	4065	6700
40	251	460	732	1285	2083	3605	4906	8087
50	293	538	857	1504	2437	4217	5740	9461
60	336	616	981	1721	2789	4827	6570	10829
70	377	692	1102	1934	3134	5424	7383	12170
80	420	770	1225	2150	3485	6031	8209	13531
90	461	846	1347	2364	3831	6630	9024	14874
100	503	922	1468	2577	4176	7228	9838	16216
125	607	1113	1771	3108	5037	8718	11866	19558
150	710	1302	2072	3636	5893	10198	13881	22879
175	813	1491	2374	4166	6752	11685	15905	26216
200	916	1680	2675	4694	7608	13166	17921	29539
250	1121	2057	3274	5746	9313	16118	21938	36160
300	1336	2452	3902	6848	11099	19209	26145	43094

SIZES 2 1/2" THROUGH 12"

VEL., FPM	30000	30000	30000	30000	30000	30000	24000	24000
PRESS. (PSIG)	REGULATOR or PIPE SIZE (inches)							
	2 1/2	3	4	5	6	8	10	12
-10	718	1109	1910	3002	4335	7507	9466	13437
-5	1558	2405	4142	6509	9399	16276	20524	29134
0	2233	3448	5938	9331	13475	23334	29424	41767
5	2979	4600	7922	12449	17978	31131	39256	55723
10	3671	5669	9762	15341	22154	38362	48374	68666
15	4356	6725	11581	18200	26283	45512	57390	81464
20	5033	7772	13383	21032	30372	52594	66320	94139
25	5705	8809	15170	23839	34426	59613	75171	106703
30	6373	9841	16947	26632	38459	66596	83977	119203
40	7692	11878	20454	32143	46418	80378	101355	143871
50	9000	13896	23929	37605	54305	94036	118578	168318
60	10301	15905	27389	43042	62156	107631	135722	192653
70	11576	17874	30779	48370	69851	120955	152523	216502
80	12870	19873	34221	53779	77662	134481	169579	240713
90	14148	21846	37619	59119	85373	147834	186417	264614
100	15424	23817	41012	64452	93074	161169	203233	288484
125	18603	28725	49465	77735	112256	194385	245117	347938
150	21763	33603	57865	90936	131319	227395	286743	407024
175	24936	38503	66303	104197	150470	260557	328560	466382
200	28097	43384	74708	117405	169544	293586	370208	525501
250	34395	53108	91453	143720	207545	359389	453186	643286
300	40991	63293	108992	171283	247348	428313	540098	766655

SATURATED STEAM FLOW TABLE (LB/HR) BASED ON SCHEDULE 40 PIPE

SIZES 3/8" THROUGH 4"

VEL., FPM	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
PRESS. (PSIG)	REGULATOR or PIPE SIZE (inches)									
	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
-10	14	23	40	65	112	153	252	239	370	637
-5	31	49	87	141	243	331	546	519	802	1381
0	45	71	124	202	349	475	783	744	1149	1979
5	59	95	166	269	465	633	1044	993	1533	2641
10	73	117	204	331	573	781	1287	1224	1890	3254
15	87	138	243	393	680	926	1526	1452	2242	3860
20	100	160	280	454	786	1070	1764	1678	2591	4461
25	114	181	318	515	891	1213	1999	1902	2936	5057
30	127	202	355	575	996	1355	2233	2124	3280	5649
40	153	244	428	694	1202	1635	2696	2564	3959	6818
50	179	286	501	812	1406	1913	3154	3000	4632	7976
60	205	327	574	930	1609	2190	3610	3434	5302	9130
70	231	367	645	1045	1808	2461	4057	3859	5958	10260
80	257	408	717	1162	2010	2736	4510	4290	6624	11407
90	282	449	788	1277	2210	3008	4958	4716	7282	12540
100	307	489	859	1392	2409	3279	5405	5141	7939	13671
125	371	590	1036	1679	2906	3955	6519	6201	9575	16488
150	434	691	1212	1964	3399	4627	7626	7254	11201	19288
175	497	791	1389	2251	3895	5302	8739	8312	12834	22101
200	560	892	1565	2536	4389	5974	9846	9366	14461	24903
250	686	1091	1915	3104	5373	7313	12053	11465	17703	30484
300	817	1301	2283	3700	6403	8715	14365	13664	21098	36331
400	1065	1696	2976	4823	8347	11361	18725	17812	27502	47360
500	1326	2110	3703	6002	10387	14138	23303	22166	34225	58936
600	1591	2532	4444	7202	12464	16965	27963	26599	41	70724

SIZES 5" THROUGH 24"

VEL., FPM	10000	10000	10000	8000	8000	8000	8000	8000	8000	8000
PRESS. (PSIG)	REGULATOR or PIPE SIZE (inches)									
	5	6	8	10	12	14	16	18	20	24
-10	1001	1445	2502	3155	4479	5413	7071	8951	11122	16087
-5	2170	3133	5425	6841	9711	11737	15332	19407	24115	34878
0	3110	4492	7778	9808	13922	16826	21980	27822	34572	50002
5	4150	5993	10377	13085	18574	22448	29325	37119	46124	66710
10	5114	7385	12787	16125	22889	27662	36136	45740	56836	82204
15	6067	8761	15171	19130	27155	32818	42871	54265	67430	97526
20	7011	10124	17531	22107	31380	37924	49542	62708	77921	112700
25	7946	11475	19871	25057	35568	42986	56153	71078	88321	127741
30	8877	12820	22199	27992	39734	48021	62731	79404	98667	142706
40	10714	15473	26793	33785	47957	57959	75713	95836	119086	172238
50	12535	18102	31345	39526	56106	67808	88579	112121	139321	201505
60	14347	20719	35877	45241	64218	77611	101385	128331	159464	230638
70	16123	23284	40318	50841	72167	87219	113936	144217	179204	259189
80	17926	25887	44827	56526	80238	96972	126677	160345	199244	288174
90	19706	28458	49278	62139	88205	106601	139255	176265	219027	316787
100	21484	31025	53723	67744	96161	116217	151817	192166	238785	345363
125	25912	37419	64795	81706	115979	140168	183105	231770	287997	416540
150	30312	43773	75798	95581	135675	163972	214199	271128	336904	487276
175	34732	50157	86852	109520	155461	187884	245437	310668	386036	558337
200	39135	56151	97862	123403	175167	211700	276549	350048	434970	629112
250	47907	69182	119796	151062	214429	259150	338534	428507	532463	770120
300	57094	82449	142771	180033	255552	308850	404358	510687	634579	917814
400	74426	107479	186112	234685	333130	402609	525936	665717	827219	1196436
500	92620	133751	231607	292053	414562	501024	654498	828448	1029428	1488898
600	111143	160501	277928	350464	497474	601229	785398	994137	1235314	1786677

SELECTING PRESSURE PILOTS

Any of the Main Valves described in the Main Valve Section can be combined with any of the Pilots listed below to produce the SPENCE Pressure Regulator. This Regulator will reduce and regulate a steady

or varying initial pressure, within the range specified, so as to maintain a constant, adjustable, predetermined delivery pressure. The table below lists the principal Pressure Pilots.

PRESSURE REGULATOR PILOTS

Type	Service Conditions								Normal Accuracy ±	Diaphragm		Loading	Main Valve
	Cast Iron		Cast Steel		Cast Steel		Delivery Pressure			Diameter inches	Material		
	Maximum Initial Pressure psi	Maximum Temperature °F	Maximum Initial Pressure psi	Maximum Temperature °F	Maximum Initial Pressure psi	Maximum Temperature °F	Minimum psi	Minimum psi					
D	250	450	-	-	600	750	3	150	1psi	31/2	St. Stl.	Spring	E or C Series
D2	250	450	-	-	600	750	100	300	2 psi	31/2	St. Stl.	Spring	E or C Series
D5	250	450	-	-	-	-	1	25	1/2 psi	5 3/4	St. Stl.	Spring	E or C Series
D120	250	450	-	-	600	750	5	150	1psi	4 1/2	St. Stl.	Spring	E or C Series
A73	250	450	-	-	600	750	See response curves on A Pilot Product Page 55		1/2 psi	3 1/2-7 1/4b	St. Stl.	Air	E or C Series
A53	250	450	-	-	600	750			1/2 psi	3 1/2_5 3/4b	St. Stl.	Air	E or C Series
A	250	450	-	-	600	750			1/2 psi	3 1/2	St. Stl.	Air	E or C Series
A35	250	450	-	-	-	-			1/8 psi	5 3/4-3 1/2b	St. Stl.	Air	E or C Series
A54	250	450	-	-	600	750			1psi	4 1/2_5 3/4b	St. Stl.	Air	E or C Series
A70	250	450	-	-	600	750			2 psi	7 1/4	St. Stl.	Air	E or C Series
A86	250	450	-	-	600	750			1/2 psi	4 1/2	St. Stl.	Air	E or C Series
A87	250	450	-	-	600	750			1/2 psi	7 1/4	St. Stl.	Air	E or C Series
A85	250	450	-	-	600	750			1/2 psi	3 1/2_5 3/4b	St. Stl.	Air	E or C Series
A84	250	450	-	-	600	750			1/2 psi	3 1/2	St. Stl.	Air	E or C Series
A83	250	450	-	-	600	750			1/2 psi	3 1/2	St. Stl.	Air	E or C Series
A82	250	450	-	-	-	-			1/8 psi	5 3/4	St. Stl.	Air	E or C Series
Safety Pilot	-	-	300	500	600	750	5	175	-	3 1/2	St. Stl.	Spring	E or C Series
P125	250	450	-	-	600	750	5	175	1psi	4 1/2	St. Stl.	Spring	E or C Series

NOTES ON SELECTION OF PILOTS

D SERIES PILOTS meet the requirements of the majority of all pressure regulator problems. They are spring-loaded. Other Pilots are modifications of the D Series for specific purposes.

A SERIES PILOTS are air-loaded. These Pilots are recommended where frequent changes in setting must be made and the Regulator is not easily accessible.

In any one Series of Pilots a larger Diaphragm will produce closer accuracy of control but with less range in delivery pressure.

Water Service Pilot operated Regulators are not uniformly satisfactory as water reducing valves unless the delivery system has the ample cushioning afforded by an elevated tank or air chamber. When the flow is intermittent to an inflexible system, the SPENCE Type D34 Direct Operated Pressure Reducing Valve is recommended.

SIZING PRESSURE REGULATORS

DATA REQUIRED FOR ORDERING

1. **SERVICE** Fluid flowing through Regulator.
2. **INITIAL (INLET) PRESSURE**
 - (a) Maximum/Minimum.
 - (b) Superheat, Gravity, etc.
 - (1) Steam Service-Total Temperature or Degrees Superheat, if any.
 - (2) Air, Gases, Water and Liquids-Temperature and Specific Gravity.
3. **DELIVERY (OUTLET) PRESSURE** Maximum/Minimum.
4. **CAPACITY** Maximum required flow through Regulator.
5. **END CONNECTIONS** Screwed or Flanged. (If flanged, state drilling.)

EXAMPLE

Select size and type Regulator to pass 14,600 lb. steam per hour reducing from 175/150 psi saturated to 40/20 psi. Ends to be flanged, pilot spring loaded and pressure controlled within 2 psi.

1. Steam
2.
 - (a) 175/150psi
 - (b) None (saturated, 378°F total temperature)
3. 40/20 psi
4. 14,600lb. per hour
5. Flanged, if 2 1/2" size or larger

SELECTION OF TYPE AND SIZE OF REGULATOR

MAIN VALVE	PILOT
A. TYPE -See Selection Criteria for Steam, Air, Gases or Water and Liquids in beginning of this Section. B. SIZE -See applicable Valve Capacity Tables in this Section C. MATERIAL - See Main Valve Selection Chart in Technical Reference Section or individual Product Pages.	See Selection Criteria and Selection Charts opposite. See Pilot Selection Chart opposite or individual Product Pages
D. ACCESSORIES -See Accessories in Other Products Section	

SELECTION OF TYPE AND SIZE OF REGULATOR

MAIN VALVE	PILOT
A. Since maximum Delivery Pressure is less than 75% of minimum Initial Pressure and the least pressure drop exceeds required "minimal differential". SELECT TYPE E B. For 14,600 lb. per hour and 150 psi minimum Initial Pressure Economical: SELECT 3" FULL PORT Engineered: SELECT 4" NORMAL PORT C. For 175 psi, 378°F: SELECT CAST IRON, FLANGED 250 LB	Since maximum Initial Pressure 175 psi, Total Temperature 378°F maximum Delivery Pressure 40 psi, Pilot spring loaded and required accuracy 2 psi: SELECT TYPE D For 175 psi, 378°F: SELECT CAST IRON
D. None required in this case	D. None required in this case

ECONOMICAL SOLUTION: 3" FULL PORT SPENCE TYPE ED, CAST IRON BODY, 250 LB. FLANGED ENDS ENGINEERED SOLUTION: 4" NORMAL PORT SPENCE TYPE ED, CAST IRON BODY, 250 LB. FLANGED ENDS.

NOTE: Pressure Regulators should always be protected by properly designed Strainers.

PRESSURE RECOVERY FACTORS FOR REGULATORS

TRIM	F _L (Liquid Service)									
	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
Normal	0.998	0.997	0.996	0.990	0.980	0.968	0.958	0.950	0.944	0.940
Full	0.998	0.996	0.987	0.980	0.970	0.960	0.948	0.936	0.928	0.925
Parabolic	0.957	0.956	0.955	0.954	0.953	0.952	0.95	0.945	0.942	0.938

TRIM	X _T (Gas Service)									
	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
Normal	0.837	0.835	0.833	0.823	0.807	0.787	0.771	0.758	0.749	0.742
Full	0.837	0.833	0.818	0.807	0.790	0.774	0.755	0.736	0.723	0.719
Parabolic	0.769	0.768	0.766	0.764	0.763	0.761	0.758	0.750	0.745	0.739

SELECTING TEMPERATURE PILOTS

Any of the Main Valves described in the Main Valve Section can be combined with any of the Pilots listed below, to produce the SPENCE Temperature Regulator. This Regulator is designed to control the flow of fluid to a heating or cooling element so as to maintain a constant, adjustable, precise predetermined temperature. Pilots fully stroke valve within 5°F. The table below lists the principal Temperature Pilots.

The Thermostats of these SPENCE Pilots are of the Vapor Tension Type. They are ruggedly constructed and will not be injured by overheating.

These SPENCE Temperature Pilots can be furnished with 150°F range of temperature adjustment on special order. It should be noted that since heavier Adjusting Springs are required for this greater range the regulation will not be quite so accurate.

TEMPERATURE RANGES

20°F to 120°F 150°F to 300°F Thermostats can be
50°F to 150°F 170°F to 270°F furnished for temperatures
70°F to 170°F 250°F to 350°F higher than 350°F on
120°F to 220°F special order.

TEMPERATURE REGULATOR PILOTS

Type	Service Conditions							Operating Characteristics	Main Valve
	Cast Iron		Cast Bronze ^a		Cast Steel		Delivery Pressure Minimum psi		
	Maximum Initial Pressure psi	Maximum Temperature °F	Maximum Initial Pressure psi	Maximum Temperature °F	Maximum Initial Pressure psi	Maximum Temperature °F			
T134	250	450	-	-	600	750	20	Cascade Control-Closes on rise in temperature-controls delivery pressure-decreases delivery pressure as temperature increases & vice versa-spring loaded pressure control	E or C Series
T124	250	450	-	-	-	-	125		
T14	250	450	-	-	600	750	-	Closes on rise in temperature.	E or C Series
T14D	250	450	-	-	600	750	150	Closes on rise in temperature-controls delivery pressure at predetermined setting- spring loaded pressure control	E or C Series
T14D2	250	450	-	-	600	750	300		
T52	250	450	-	-	-	-	-	Opens on rise in temperature	E or C Series
Safety Pilot	-	-	300	500	-	-	-	Prevents excessive temperature rise.	E or C Series

^aBronze Body Pilots are recommended for water service.

AIR CONTROLLED TEMPERATURE PILOTS

SPENCE Air Control Pilots, listed below, have been developed to meet special conditions when used in conjunction with A Series Pressure Pilots. The fast bi-metal thermostats have a 200°F adjustable range and protection against damage from

over-heating. By cascading an air signal onto a pressure regulator, the EAT Series temperature control reduces steam pressure to an adjustable limit as well as regulating output temperature

Type	Bulb Style	Bulb Material	Bulb Mounting	Range OF	Maximum Bulb Temperature °F	Control Mode	Action
T61	No. 736	Bronze	1/2 NPT	50-250	350	Proportional	Reverse*
	No. 737	St. Stl.1	1/2 NPT	50-250	350	Proportional	Reverse*
T64	No. 738	St. Stl.1	Sanitary Thermometer Bushing	50-250	350	Proportional	Reverse*
T60	No. 745	St. Stl.2	1/2 NPT Union Mounted	30-150	180	Proportional	Reverse*
				100-300***	350	Proportional	Reverse*

* Rising output pressure on falling temperature. This action applied to an EA Series Regulator increases steam flow with decreasing temperature. Direct action available for cooling control.

Rate or reset available on application *Other ranges on application ¹Type 304 ²Type 347 or optional Type 316

NOTES ON SELECTION OF PILOTS

HEATING CONTROL Single Pilot Types T134 and Combination Pilot Type T14D2 reduce the steam pressure as well as regulate the output temperature. A choice should be made according to the maximum required delivery pressure, i.e., the pressure needed in the heater to carry the peak load. Pilot Types T14D and T14D2 in cast steel are designed for initial steam pressures in excess of 500°F.

Of the Air Control Pilots, the Type T61 is the general choice. The Type T60 is used for temperature indication or for remote adjustment. The required heater pressure will determine the choice of the A Series Pilot. See Product Pages.

COOLING CONTROL Pilot Type T52 is employed With Type

E or C Series Main Valves to control temperature by regulating the flow of a cooling medium. This Pilot opens the Main Valve on rising temperature and exercises no control over the delivery pressure. The Air Control Pilots can be furnished with increasing air signal on temperature rise for use in cooling control. **TEMPERATURE RANGES** Selection of the following ranges of temperature adjustment is recommended for the services noted:

50°F to 150°F Room or air duct control Domestic or laundry
120°F to 220°F hot water service. Fuel oil preheating.
70°F to 170°F Fuel oil heating.
170°F to 270°F

SIZING TEMPERATURE REGULATORS

DATA REQUIRED FOR ORDERING

1. SERVICE

- (a) Fluid flowing through Regulator.
- (b) Type heater to be controlled.

2. INITIAL (INLET) PRESSURE

- (a) Maximum/Minimum.
- (b) Superheat, Gravity, etc.
 - (1) Steam Service-Total Temperature or Degrees Superheat, if any.
 - (2) Air, Gases, Water and Liquids-Temperature and Specific Gravity.

3. DELIVERY (OUTLET) PRESSURE Maximum required on heater.

4. CAPACITY Maximum required flow through Regulator or the following data leading to same:

- (a) Quantity and type of fluid to be heated or cooled.
- (b) Temperature rise or drop, °F.

5. THERMOSTAT CHARACTERISTICS:

- (a) Controlled Temperature, °F-Maximum/Minimum.
- (b) Operation-Open or Close on temperature rise.
- (c) Thermostat Bulb-Style Number and Material.
- (d) Flexible Tubing-Length and Material.

6. END CONNECTIONS Screwed or Flanged. (If flanged, state drilling)

EXAMPLE

Select size and type Regulator for heating 120 gpm water from 50°F entering temperature to 170°F final temperature in an instantaneous heater. Steam supply at 125 psi pressure to be reduced to 30 psi maximum in heater.

1. (a) Steam
(b) Instantaneous
2. (a) 125 psi
(b) None (saturated, 353°F total temperature)
3. 30 psi
4. See Capacity Tables in this Section.
 - (a) 120 gpm water.
 - (b) $170 - 50 = 120^\circ\text{F Rise}$

$$\frac{120 \times 120}{2} = 7200 \text{ #/Hr.}$$
5. (a) 170°F-Select standard Temperature Range from facing page to include this final temperature.
(b) Close on temperature rise.
(c) Style No. 700 bronze. (See Options Section)
(d) Ten (10) feet, brass-furnished unless otherwise specified.
6. Flanged, if 2 1/2" size or larger.

SELECTION OF TYPE AND SIZE OF REGULATOR

MAIN VALVE	PILOT
A. TYPE -See Selection Criteria for Steam, Air, Gases or Water and Liquids in beginning of this Section.	See Selection Criteria and Selection Charts opposite.
B. SIZE -See applicable Valve Capacity Tables in this Section	
C. MATERIAL - See Main Valve Selection Chart in Technical Reference Section or individual Product Pages.	See Pilot Selection Chart opposite or individual Product Pages
D. ACCESSORIES -See Accessories in Other Products Section	

SELECTION OF TYPE AND SIZE OF REGULATOR

MAIN VALVE	PILOT
A. Since maximum Delivery Pressure is less than 75% of minimum Initial Pressure and the least pressure drop exceeds required "minimal differential". SELECT TYPE E	Since maximum Initial Pressure 125 psi, Total Temperature 353°F maximum Delivery Pressure 30 psi SELECT TYPE T124
B. Using Capacity Tables in this Section, for 7200#/Hr and 125 psi initial pressure SELECT 211FULL PORT	
C. For 125 psi, 353°F: SELECT CAST IRON, NPT 250	For 125 psi, 353°F: SELECT CAST IRON
D. None required in this case	None required in this case

ECONOMICAL SOLUTION: 311 SPENCE TYPE ET124, CAST IRON BODY, NPT 250 ENDS TEMPERATURE RANGE 120-220°F EQUIPPED WITH 10 FEET OF BRASS FLEXIBLE TUBING AND STYLE NO. 700 BRONZE THERMOSTAT BULB.

Temperature Regulators should always be protected by properly designed Strainers.

SELECTING DIFFERENTIAL PRESSURE PILOTS

SPENCE Differential Pressure Regulators may usually be classified in one or the other of the following groups:

1. Control of the delivery pressure at a constant, adjustable, predetermined differential above another source of fluid pressure. This case is illustrated by the use of the SPENCE Type EN Differential Pressure Regulator on a boiler feedwater make-up line to control the delivery pressure of the feedwater at a constant differential above the boiler steam pressure. Another example is the use of the Type EN to control the steam pressure on a

steam atomizing oil burner at a constant differential above the oil pressure at the nozzle.

2. Control of the differential pressure or pressure drop across the Pressure Regulator itself. This case is illustrated by the use of the SPENCE Type EN24 Differential Pressure Regulator installed in parallel with a heat exchanger to maintain a constant differential across it thereby limiting the flow rate of fluid through the heater.

The table below lists the principal Differential Pilots.

TYPE	Service Conditions											Normal Accuracy	Diaphragm		Loading	Operating Characteristics	Main Valve
	Cast Iron			Cast Bronze-			Cast Steel			Differential Pressure			Diameter	Material			
	MAX INITAL Pres- sure psi	Max Temper- ature °F	Max Diaph Pres sure psi	Max Initial Pres sure psi	Max Temper- ature °F	Max Diaph Pressure psi	MAX INITAL Pres sure psi	Max Temper- ature °F	Max Diaph Pres sure psi	Min. psi	MAX. psi						
N	250	450	240	300	500	290	600	750	300	3	150	1psi	3112	St. Stl.	Spring	Closes on increase in differential Delivery pressure controlled at set differential above loading pressure Loading Pressure may be any fluid	E or C Series
N33	250	450	240	300	500	290	600	750	300	3	150	1psi	3112	St. Stl.	Spring		E or C Series
N20	250	366	250	300	366	300	300	366	300	3	150	1psi	3112	St. Stl.	Spring	Opens on increase in differential Initial pressure controlled at set differential above loading pressure Loading pressure may be any fluid	E or C Series

•Bronze Body Pilots are recommended for water service.

NOTES ON SELECTION OF PILOTS

TYPE N AND N33 PILOTS require that the delivery pressure (pressure of fluid discharged from the Regulator) be controlled at a given differential above some separate source of loading pressure.

TYPE N meets the requirements of most boiler feedwater make-up and steam atomizing oil burner differential control

problems as described in the first group in the above table.

TYPE N33 is a version of the Type N in which two separated diaphragms are employed to preclude the possibility of contact between the two fluids applied to the pilot.

TYPE N20 is a differential relief pilot which causes the Main Valve to open when its initial pressure exceeds the loading pressure by a set differential.

SIZING DIFFERENTIAL PRESSURE REGULATORS

DATA REQUIRED FOR ORDERING

1. **SERVICE** Fluid flowing through Regulator.
2. **INITIAL (INLET) PRESSURE**
 - (a) Maximum/Minimum.
 - (b) Superheat, Gravity, etc.
 - (1) Steam Service-Total Temperature or Degrees Superheat, if any.
 - (2) Air, Gases, Water and Liquids-Temperature and Specific Gravity.
3. **LOADING PRESSURE**
 - (a) Maximum/Minimum.
 - (b) Fluid
4. **CONTROLLED PRESSURE**
 - (a) Maximum/Minimum.
 - (b) Fluid
5. **DELIVERY PRESSURE** Maximum/Minimum.
6. **CAPACITY** Maximum required flow through Regulator.
7. **END CONNECTIONS** Screwed or Flanged. (If flanged, state drilling.)

EXAMPLE

Select size and type Regulator to control the flow of water from a Motor-Driven Centrifugal Boiler Feed Pump maintaining an Excess or Differential pressure of 50 psi between the boiler feedwater and the boiler steam pressure. The feedwater temperature is 240°F. The boiler steam pressure is 150 psi. Flow 90 gpm at 220 psi pump discharge pressure.

1. Water
2. (a) 220 psi
(b) 240°F
3. (a) 150 psi Boiler Pressure
(b) Steam
4. (a) 200 psi (Loading plus Excess Pressure) (b) Water
5. Identical with Controlled Pressure, Item 4
6. 90 gpm
7. Flanged, if 2 1/2" size or larger

MAIN VALVE

- A. **TYPE**-See Selection Criteria for Steam, Air, Gases or Water and Liquids in beginning of this Section.
- B. **SIZE**-See applicable Valve Capacity Tables in this Section.
- C. **MATERIAL**- See Main Valve Selection Chart in Technical Reference Section or individual Product Pages.
- D. **ACCESSORIES**-See Accessories in Other Products Section

PILOT

See Selection Criteria and Selection Charts opposite.

See Pilot Selection Chart opposite or individual Product Pages

MAIN VALVE

- A. Since pressure drop across valve (Initial Pressure minus Delivery Pressure) is greater than 10 psi:
SELECT TYPE E
- B. For 90 gpm: **SELECT 311**
- C. For 220 psi, 240°F: **SELECT CAST IRON, FLANGED 250 LB.**
- D. For Water Service: Dashpot required.

PILOT

Since Initial Pressure 220 psi, 240°F, Differential (Excess) Pressure 50 psi and the Delivery and Controlled Pressures are the same:

SELECT TYPE N

For 220 psi, 240°F:
t

None required in this case

ANSWER: 3" SPENCE TYPE EN, CAST IRON BODY, 250 LB FLANGED ENDS, EQUIPPED WITH BRONZE DASHPOT AND BRONZE PILOT BODY.

NOTE: Differential Regulators should always be protected by properly designed Strainers.

WATER CAPACITY TABLE-FLOW IN GALLONS PER MINUTE

These flow rates provide a simple method for sizing regulators or water pipes with inlet velocities in the range of 240 to 600 fpm. Spence Regulators have variable seat sizes. The factory will select the proper seat for particular flow and pressure drop. Additional capacity data is available on request.

VALVE OR PIPE SIZE															
1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12
Velocity, fpm															
247	251	255	262	270	277	285	300	315	330	360	390	420	480	540	600
1.3	2.5	4.0	7.3	12	22	30	52	78	127	238	405	630	1250	2210	3490

SELECTING BACK PRESSURE PILOTS

Any of the Main Valves described in the Main Valve Section can be combined with any of the Pilots listed below to produce the SPENCE Back Pressure Regulator. Provided the delivery (discharge) pressure is sufficiently below the desired back pressure to operate the Regulator, it will maintain a steady back pressure regardless of fluctuations in the load. The Pilot is guaranteed to shut tight when the back pressure falls below a predetermined setting. The table below lists the principal

Back Pressure Pilots. **THE SPENCE BACK PRESSURE REGULATOR IS NOT A SAFETY VALVE AND SHOULD NEVER BE USED AS SUCH.**

The discharge pressure must always be low enough in relation to the back pressure to provide the required minimum differential listed in the Main Valve Selection Chart in the Technical Reference Section.

BACK PRESSURE REGULATOR PILOTS

TYPE	Service Conditions							Diaphragm		Main Valve
	Cast Iron		Cast Steel		Differential Pressure			Diameter	Material	
	Maximum Initial Pressure psi	Maximum Temperature °F	Maximum Initial Pressure psi	Maximum Temperature °F	Minimum psi	Maximum psi	Normal Accuracy ±			
Q	150	366	150	366	3	150	1 psi	3 1/2	St. Stl.	E or C Series
Q2	250	450	600	750	100	400	2 psi	3 1/2	St. Stl.	E or C Series
Q73 ^b	150	366	150	366	3	150	112 psi	3 1/2 - 7 1/4	St. Stl.	E or C Series
F14	250	450	600	750	3	150	1 psi	4	St. Stl.	E or C Series
F13	250	450	600	750	100	300	2 psi	3	St. Stl.	E or C Series
F15	250	450	600	750	2	25	1/2 psi	5	St. Stl.	E or C Series
F32	250	450	600	750	200	2000	10 psi	piston	St. Stl.	E or C Series

^bType Q73 is air adjusted, all others are spring loaded.

^cThese Pilots have dual diaphragms, the first size being the control diaphragm and the second, the air loading diaphragm.

NOTES ON SELECTION OF PILOTS

TYPE Q SERIES meet the requirements of the majority of all back pressure problems. They are packless and spring or air loaded. The Type Q Pilot can be furnished for service on refrigerants on special order.

TYPE F SERIES have bellows stem seals and separate diaphragm chambers. They are designed for applications where a regulator is required to open on rise in pressure of a fluid other

than that flowing through the regulator. Type F Series Pilots are also recommended for usual back pressure service in the event that long control pipes are unavoidable.

In either series of back pressure pilots, a larger Diaphragm will produce closer accuracy of control but with less range in back pressure

SIZING DIFFERENTIAL PRESSURE REGULATORS

DATA REQUIRED FOR ORDERING

1. **SERVICE** Fluid flowing through Regulator.
2. **INITIAL (INLET) PRESSURE**
 - (a) Maximum/Minimum.
 - (b) Superheat, Gravity, etc.
 - (1) Steam Service-Total Temperature or Degrees Superheat, if any.
 - (2) Air, Gases, Water and Liquids-Temperature and Specific Gravity.
3. **DISCHARGE (OUTLET) PRESSURE** Maximum/Minimum.
4. **CAPACITY** Maximum required flow through Regulator.
5. **END CONNECTIONS** Screwed or Flanged. (If flanged, state drilling.)

EXAMPLE

Select size and type Regulator to pass 9000 lb steam per hour retaining a back pressure of 5 psi and exhausting into a condenser at 6" Hg vacuum. Pilot to be packless, spring loaded and to control the pressure within $\pm 1/2$ psi.

1. Steam
2. (a) 5 psi
(b) None (saturated, 228°F total temperature)
3. 6" Hg vacuum
4. 9000 lb. per hour
5. Flanged, if 2 1/2" size or larger

SELECTION OF TYPE AND SIZE OF REGULATOR

MAIN VALVE	PILOT
A. TYPE -See Selection Criteria for Steam, Air, Gases or Water and Liquids in beginning of this Section.	See Selection Criteria and Selection Charts opposite.
B. SIZE -See applicable Valve Capacity Tables in this Section.	
C. MATERIAL - See Main Valve Selection Chart in Technical Reference Section or individual Product Pages.	See Pilot Selection Chart opposite or individual Product Pages.
D. ACCESSORIES -See Accessories in Other Products Section.	

SELECTION OF TYPE AND SIZE OF REGULATOR

MAIN VALVE	PILOT
A. Since Initial Pressure is less than 15 psi and the least pressure drop exceeds "minimum differential": SELECT TYPE E2	Since maximum Initial Pressure 5 psi, Total Temperature 228°F, accuracy of control $\pm$ psi and Pilot spring loaded: SELECT TYPE F15
B. For 9000 lb. per hour and 5 psi Initial Pressure: SELECT an SIZE.	
C. For 5 psi, 228°F: SELECT CAST IRON, FLANGED 125 LB.	For 5 psi, 228°F: SELECT CAST IRON
D. For discharge into vacuum: Condensation Chamber required.	None required in this case.

ANSWER: an SPENCE TYPE E2F15, CAST IRON BODY, 125 LB. FLANGED ENDS, EQUIPPED WITH CONDENSATION CHAMBER.

NOTE: Back Pressure Regulators should always be protected by properly designed Strainers.

SELECTING PUMP GOVERNOR PILOTS

SPENCE Pump Governors are classified in four groups as follows:

1. Constant Pressure Pump Governor which is illustrated by the SPENCE Type EP14 Pump Governor. This Regulator governs the steam supply to a pump, either reciprocating or turbine-driven, and maintains a constant, adjustable pump discharge pressure.
2. Excess Pressure Pump Governor which is illustrated by the SPENCE Type EN Differential Pressure Regulator. Although this Regulator is not a Pump Governor, it is recommended to govern the steam supply to boiler feed pump where it is desired to maintain the pump discharge pressure at a constant, adjustable differential pressure in excess of the boiler steam pressure.
3. Vacuum Pump Governor which is illustrated by the SPENCE Type EF46 Pump Governor. This Regulator governs the steam supply to a vacuum pump and maintains a constant, adjustable vacuum on the pump suction.
4. Differential Control for electric motor-driven centrifugal pumps which is illustrated by the SPENCE Type EN Differential Pressure Regulator. Although this Regulator is not a Pump Governor, it is recommended to maintain a constant, adjustable differential between the feedwater pressure and the boiler steam pressure; i.e., a constant pressure drop across the feedwater regulator.

The table below lists the principal Pump Governor Pilots.

PUMP GOVERNOR PILOTS

TYPE	Service Conditions						Diaphragm		Main Valve	Type of Control
	Cast Iron		Cast Steel		Differential Pressure					
	Maximum Initial Pressure psi	Maximum Temper- ature °F	Maximum Initial Pressure psi	Maximum Temper- ature °F	Minimum psi	Maximum psi	Diameter	Material		
P13	250	450	600	750	100	300	3 1/2	St. Stl.	E or C Series	Constant Pressure
P14	250	450	600	750	5	150	4 1/2	St. Stl.	E or C Series	Constant Pressure
P15	250	450	600	750	3	25	5 3/4	St. Stl.	E or C Series	Constant Pressure
P32	250	450	600	750	200	2000	7/8 Piston	St. Stl.	E or C Series	Constant Pressure
F46	250	450	600	750	0	30" Hg vac	4 1/2	St. Stl.	E or C Series	Vacuum
N	250	450	600	500	3 ^b	300 ^b	3 1/2	St. Stl.	E or C Series	Differential ^c

^bRegulator discharge pressure

^c For electric motor driven centrifugal pump applications only, differential pressure range 3 to 150 psi

NOTES ON SELECTION OF PILOTS

P SERIES PILOTS are used for constant pressure control. In this Series a larger Diaphragm will produce closer accuracy of control but with less range in pump discharge pressure. TYPE F46 is a vacuum pump governor Pilot. TYPE N is a differential pressure Pilot which is applied to the discharge of a constant speed centrifugal pump to effect excess pressure control. The design of the Pilot requires

that the delivery pressure (pressure of fluid discharged from Regulator) be controlled at a given differential above some separate source of loading pressure. In typical service, boiler feedwater flows through the Regulator and is delivered at constant excess pressure above the boiler steam pressure

RATED STEAM CAPACITY TABLE

TYPE E MAIN VALVE - FULL PORT

VALVE INFO PAGE 32

POUNDS OF SATURATED STEAM PER HOUR

PRESSURE-psig		VALVE SIZE (inches)														
INLET	REDUCED	3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	5	6	8	10	12
20	0	86	160	309	504	808	1134	1776	2521	4239	6244	9682	14208	25436	40446	63762
25	10	90	168	325	529	848	1190	1864	2645	4449	6553	10161	14911	26695	42447	66917
	0	98	184	354	577	925	1299	2033	2886	4853	7148	11083	16264	29118	46301	72993
30	15	98	182	352	573	919	1290	2019	2866	4821	7101	11009	16156	28924	45992	72505
	0	110	206	398	648	1038	1458	2282	3239	5448	8024	12441	18257	32685	51972	81934
40	25	111	207	400	652	1044	1466	2296	3259	5481	8073	12517	18368	32884	52289	82432
	20	121	227	437	713	1142	1604	2511	3564	5994	8829	13688	20087	35963	57184	90149
	3-0	134	250	482	786	1259	1768	2768	3929	6608	9733	15091	22146	39648	63043	99387
50	35	123	229	442	721	1155	1622	2540	3605	6062	8930	13845	20317	36374	57838	91181
	30	136	253	489	796	1276	1791	2805	3981	6695	9861	15289	22436	40168	63870	100691
	25	145	270	521	849	1361	1911	2992	4247	7143	10522	16313	23939	42859	68150	107437
	6-0	157	294	566	923	1478	2076	3250	4614	7759	11429	17720	26003	46554	74026	116701
60	45	134	249	481	784	1256	1763	2760	3918	6589	9706	15048	22083	39535	62865	99106
	40	148	277	535	871	1396	1960	3069	4356	7326	10791	16731	24552	43955	69893	110185
	35	160	298	575	936	1500	2107	3299	4682	7874	11599	17984	26390	47247	75127	118436
	10-0	181	337	650	1059	1697	2383	3731	5295	8906	13118	20338	29846	53434	84964	133945
75	55	166	309	596	971	1556	2185	3421	4856	8166	12028	18650	27367	48997	77909	122822
	50	179	335	645	1052	1685	2366	3705	5259	8844	13027	20198	29639	53064	84376	133077
	45	190	355	684	1115	1786	2508	3927	5574	9375	13809	21410	31418	56248	89440	141000
	15-0	215	401	774	1261	2021	2837	4442	6305	10604	15620	24218	35539	63626	101172	159496
100	75	207	387	747	1217	1950	2739	4288	6086	10236	15077	23376	34304	61415	97655	153951
	60	243	454	876	1427	2286	3210	5026	7134	11998	17673	27402	40211	71990	114471	180462
	23-0	272	507	978	1594	2554	3587	5616	7971	13406	19747	30617	44929	80437	127901	201635
125	100	232	433	835	1360	2179	3060	4791	6800	11436	16845	26118	38327	68618	109108	172008
	75	296	552	1064	1735	2779	3903	6110	8673	14586	21485	33311	48882	87515	139157	219379
	31-0	328	612	1180	1924	3082	4328	6777	9619	16177	23828	36944	54214	97061	154335	243307
150	125	253	473	912	1487	2382	3345	5238	7434	12503	18416	28544	41902	75018	119285	188057
	100	329	614	1184	1930	3093	4343	6800	9651	16231	23908	37069	54397	97388	154856	244128
	40-0	384	716	1381	2250	3605	5063	7926	11250	18921	27870	43211	63411	113526	180516	284582
175	150	273	510	983	1602	2567	3605	5645	8012	13474	19847	30722	45156	80844	128549	202656
	125	359	670	1293	2106	3375	4739	7420	10532	17712	26090	40451	59361	106275	168986	266405
	100	406	759	1463	2384	3820	5364	8399	11921	20049	29531	45787	67191	120293	191277	301546
	48-0	439	819	1580	2575	4125	5793	9069	12873	21649	31889	49442	72555	129896	206546	325618
200	150	386	721	1390	2266	3630	5098	7981	11328	19051	28062	43509	63848	114308	181760	286542
	125	442	825	1591	2592	4153	5832	9131	12961	21797	32107	49781	73051	130784	207959	327845
	56-0	493	921	1776	2895	4638	6513	10198	14474	24343	35857	55594	81582	146058	232245	366132
225	175	411	768	1481	2414	3868	5431	8504	12070	20299	29900	46358	68029	121793	193662	305306
	150	475	886	1709	2785	4462	6265	9809	13923	23415	34490	53475	78473	140492	223395	352179
	65-0	548	1023	1973	3215	5151	7234	11325	16075	27034	39821	61741	90602	162207	257923	406613
250	200	435	812	1566	2551	4088	5740	8987	12756	21453	31600	48994	71897	128719	204675	322667
	175	505	942	1817	2962	4746	6664	10434	14809	24906	36686	56880	83469	149437	237618	374601
	150	551	1028	1983	3232	5179	7272	11386	16160	27179	40034	62071	91086	163073	259301	408784
	73-0	602	1124	2167	3532	5659	7946	12441	17659	29699	43745	67825	99530	178191	283340	446682

Based on 10% (2 psi minimum) accuracy of regulation.

RATED STEAM CAPACITY TABLE

TYPE E MAIN VALVE - NORMAL PORT

VALVE INFO PAGE 32

POUNDS OF SATURATED STEAM PER HOUR

PRESSURE-psig		VALVE SIZE (inches)														
INLET	REDUCED	3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	5	6	8	10	12
20	0	38	87	279	435	603	847	1021	1393	2495	4526	6672	8761	14447	21874	36612
25	10	39	91	291	454	630	884	1066	1454	2604	4724	6965	9145	15081	22833	38217
	0	43	100	319	499	692	971	1171	1597	2861	5190	7652	10047	16567	25084	41983
30	15	43	98	315	492	682	957	1154	1573	2819	5114	7539	9899	16324	24716	41368
	0	49	112	359	561	777	1091	1316	1794	3214	5831	8597	11288	18613	28182	47169
40	25	48	112	357	558	774	1087	1310	1786	3201	5806	8560	11240	18534	28062	46969
	20	53	122	392	612	848	1191	1436	1958	3507	6362	9381	12317	20311	30752	51470
	3-0	59	136	436	681	944	1325	1597	2178	3902	7078	10436	13702	22595	34211	57260
50	35	53	123	395	617	856	1201	1448	1974	3537	6417	9460	12422	20484	31013	51908
	30	59	136	437	682	946	1328	1601	2184	3913	7097	10464	13740	22657	34304	57415
	25	63	146	467	729	1012	1420	1712	2334	4182	7586	11185	14686	24218	36667	61371
	5-0	69	160	511	799	1108	1556	1875	2557	4582	8311	12254	16089	26532	40170	67235
60	45	58	134	429	670	929	1305	1573	2145	3842	6970	10276	13493	22250	33688	56385
	40	65	149	478	746	1035	1452	1751	2388	4278	7760	11440	15022	24771	37505	62773
	35	70	161	514	803	1114	1563	1885	2570	4605	8353	12315	16170	26665	40372	67573
	8-0	79	183	587	917	1272	1786	2152	2935	5259	9539	14064	18467	30452	46106	77170
75	55	72	166	532	831	1152	1618	1950	2659	4764	8642	12741	16729	27587	41768	69909
	50	78	180	577	901	1249	1754	2114	2883	5165	9370	13814	18139	29911	45287	75798
	45	83	191	612	956	1326	1861	2244	3060	5482	9944	14661	19251	31745	48064	80446
	13-0	95	218	699	1092	1515	2126	2563	3495	6262	11359	16747	21990	36261	54901	91890
100	75	90	208	667	1041	1444	2027	2444	3333	5971	10831	15968	20967	34575	52349	87618
	60	106	245	783	1224	1698	2383	2873	3917	7019	12731	18771	24647	40642	61535	102993
	20-0	120	276	884	1381	1915	2688	3240	4418	7916	14360	21172	27799	45841	69406	116168
125	100	101	233	744	1163	1612	2263	2728	3721	6666	12092	17828	23409	38601	58444	97821
	75	129	298	953	1488	2064	2898	3493	4763	8534	15480	22823	29968	49418	74821	125231
	28-0	144	333	1066	1666	2310	3243	3910	5332	9552	17328	25547	33545	55315	83750	140176
150	125	110	254	813	1270	1762	2473	2981	4066	7284	13213	19481	25579	42180	63863	106890
	100	143	331	1059	1654	2294	3221	3882	5294	9485	17205	25367	33308	54925	83160	139188
	36-0	169	390	1247	1949	2702	3794	4573	6236	11173	20267	29881	39235	64699	97958	163956
175	150	119	274	876	1369	1898	2664	3212	4380	7847	14234	20986	27556	45439	68798	115149
	125	156	361	1154	1804	2501	3511	4233	5772	10342	18759	27658	36316	59886	90671	151759
	100	177	410	1311	2048	2840	3986	4806	6553	11741	21297	31400	41229	67987	102937	172289
	44-0	193	446	1427	2230	3092	4341	5233	7135	12784	23190	34190	44893	74028	112083	187598
200	150	168	388	1241	1939	2689	3774	4550	6205	11117	20165	29730	39037	64372	97463	163128
	125	193	445	1423	2224	3084	4329	5219	7117	12751	23129	34101	44776	73836	111792	187111
	52-0	217	501	1605	2507	3477	4881	5884	8023	14375	26075	38444	50478	83239	126029	210940
225	175	179	413	1322	2065	2863	4020	4846	6608	11839	21475	31662	41573	68555	103795	173727
	150	207	477	1528	2387	3310	4647	5602	7639	13686	24826	36602	48060	79251	119991	200834
	59-0	241	557	1782	2784	3861	5420	6534	8910	15964	28958	42694	56059	92442	139963	234262
250	200	189	436	1396	2181	3025	4247	5119	6981	12507	22687	33449	43920	72425	109656	183535
	175	220	507	1624	2537	3519	4940	5955	8120	14548	26389	38907	51087	84243	127549	213483
	150	240	555	1776	2775	3848	5402	6512	8880	15909	28859	42548	55868	92126	139485	233461
	67-0	265	611	1956	3056	4238	5949	7172	9780	17522	31785	46862	61532	101467	153627	257132

Based on 10% (2 psi minimum) accuracy of regulation.

RATED STEAM CAPACITY TABLE

TYPE E2 MAIN VALVE

TYPE E2 MAIN VALVE ONLY

Used at such low pressure drops, a 1 psi deviation of reduced pressure at rated capacity is a significant portion of the total drop. It must be accounted for in calculations dealing with a subcritical flow condition.

Also, because E2 valve opening, for 1 psi accuracy of regulation, varies with the pressure drop, a regulation factor K is inserted in the formula

$$C_v = \frac{W}{2.1 K \sqrt{\Delta P^1 (P_1 + P_2^1)}}$$

Where K = Factor from accompanying table
 Cv = Valve coefficient
 W = Flow, #/Hr. (saturated steam)
 ΔP^1 = AP nominal plus 1 psi
 P_1 = Inlet pressure, psia (psi + 14.7)
 P_2 = Reduced pressure, psia (psi + 14.7)
 P_2^1 = P_2 nominal (set point value) minus 1 psi
 ΔP = Pressure drop, psi

NOTE: When computing W for safety valve sizing, use K = 1.0

K-Factor is included in the above tabulations.

SIZE	E2 Cv Valve Coefficient	P Normal	K Factor
3/4	7.6		
1	11.7		
1 1/4	18.9	3	0.635
1 1/2	27.4	4	0.785
2	44	5	0.855
2 1/2	68	6	0.895
3	96	7	0.915
4	143	8	0.928
5	202	9	0.935
6	255	10	0.937
8	465	11	0.938
10	748	12	0.940
12	1118	15	0.940

Pounds of Saturated Steam per Hour

PRESSURE-psig		VALVE SIZE (inches)												
INLET	REDUCED	3/4	1	1/4	1-1/2	2	2-1/2	3	4	5	6	8	10	12
15	12	209	322	521	755	1212	1873	2644	3939	5564	7024	12808	20603	30794
	10	261	401	648	940	1509	2332	3293	4905	6928	8746	15949	25656	38346
	8	297	457	739	1071	1720	2658	3753	5590	7897	9969	18178	29242	43706
	5	335	515	833	1207	1938	2996	4229	6300	8899	11234	20485	32952	49252
	9" HG VAC	378	581	939	1361	2186	3378	4769	7103	10034	12667	23099	37157	55536
12	9	198	305	493	714	1147	1773	2503	3728	5266	6648	12123	19500	29146
	7	246	378	611	886	1422	2198	3103	4622	6529	8242	15030	24177	36136
	5	279	429	693	1005	1613	2493	3520	5243	7406	9350	17050	27426	40992
	11" HG VAC	341	525	848	1229	1974	3051	4308	6417	9064	11442	20865	33563	50166
10	7	190	293	473	686	1101	1702	2402	3579	5055	6381	11637	18719	27978
	5	235	362	584	847	1360	2102	2968	4421	6245	7884	14376	23125	34564
	2	277	427	689	999	1605	2480	3501	5215	7366	9299	16957	27277	40770
	12" HG VAC	316	487	787	1140	1831	2830	3995	5952	8407	10613	19353	31131	46531
9	6	186	287	463	671	1078	1665	2351	3502	4947	6245	11388	18319	27380
	4	229	353	571	827	1329	2053	2899	4318	6099	7700	14040	22585	33757
	2	259	398	643	933	1498	2315	3268	4868	6877	8681	15830	25464	38060
	13" HG VAC	304	468	756	1096	1761	2721	3841	5722	8083	10203	18606	29930	44735
8	5	182	280	452	656	1053	1628	2298	3423	4836	6105	11132	17907	26765
	3	224	345	557	807	1296	2003	2827	4211	5949	7510	13694	22028	32925
	14" HG VAC	292	449	726	1052	1690	2611	3686	5491	7756	9791	17855	28722	42929
7	4	178	273	442	640	1028	1589	2243	3341	4719	5958	10864	17476	26121
	2	218	335	542	786	1262	1950	2752	4100	5792	7311	13332	21446	32054
	15" HG VAC	280	430	695	1008	1618	2501	3531	5259	7429	9379	17102	27511	41119
6	3	173	267	431	624	1003	1549	2188	3259	4603	5811	10596	17044	25476
	1	212	326	527	764	1227	1896	2677	3988	5633	7111	12968	20860	31178
	15" HG VAC	267	411	664	963	1546	2389	3373	5024	7097	8960	16338	26282	39282
5	2	169	260	419	608	976	1508	2129	3172	4481	5656	10314	16592	24799
	0	206	317	512	742	1191	1840	2598	3870	5467	6902	12585	20245	30259
	16" HG VAC	255	392	633	918	1474	2278	3216	4791	6768	8544	15580	25061	37458

RATED STEAM CAPACITY TABLE

TYPE E5 MAIN VALVE - FULL PORT

Pounds of Saturated Steam per Hour

PRESSURE-psig		VALVE SIZE (inches)												
INLET	REDUCED	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	5	6	8	10	12
20	15	284	437	706	1023	1605	2501	3546	5935	9631	13065	24824	38001	60136
	10	370	570	920	1334	2094	3263	4626	7743	12564	17044	32383	49573	78450
	0	435	670	1083	1570	2463	3838	5442	9109	14780	20051	38097	58320	92292
25	10	305	469	758	1099	1724	2686	3809	6375	10345	14033	26663	40817	64593
	15	402	619	1000	1449	2275	3544	5025	8411	13647	18514	35176	53849	85217
	10	457	703	1136	1647	2585	4028	5712	9560	15512	21043	39982	61205	96858
	0	498	767	1240	1797	2820	4394	6230	10428	16920	22954	43612	66763	105653
30	25	324	499	806	1169	1834	2858	4053	6783	11006	14931	28369	43427	68725
	20	431	664	1073	1555	2441	3803	5392	9025	14644	19866	37745	57782	91440
	15	495	762	1231	1785	2801	4365	6189	10358	16807	22800	43321	66317	104947
	0	559	861	1391	2017	3165	4932	6993	11705	18993	25765	48954	74940	118594
40	35	359	553	894	1296	2033	3168	4492	7518	12199	16550	31444	48135	76175
	30	484	745	1203	1745	2738	4266	6049	10124	16427	22285	42341	64817	102574
	25	563	867	1400	2029	3185	4962	7036	11776	19108	25922	49252	75396	119316
	3-0	679	1045	1688	2447	3840	5983	8483	14198	23039	31254	59382	90904	143857
50	45	391	602	972	1409	2211	3446	4886	8177	13268	18000	34200	52354	82851
	40	531	817	1319	1913	3002	4677	6632	11100	18011	24434	46424	71067	112465
	35	623	959	1548	2245	3523	5489	7783	13026	21136	28673	54479	83398	131979
	6-0	797	1227	1982	2873	4509	7025	9961	16672	27052	36698	69727	106740	168917
75	70	459	706	1141	1654	2596	4044	5734	9598	15573	21127	40141	61449	97243
	65	630	970	1567	2272	3566	5556	7877	13184	21393	29022	55142	84413	133585
	60	749	1153	1863	2701	4238	6604	9363	15671	25429	34497	65544	100336	158784
	15-0	1089	1677	2708	3926	6162	9601	13614	22785	36972	50156	95296	145882	230860
100	95	516	794	1283	1861	2920	4550	6451	10797	17519	23767	45157	69127	109394
	80	714	1099	1775	2573	4037	6291	8920	14929	24225	32863	62440	95584	151263
	85	854	1315	2124	3079	4832	7529	10676	17868	28994	39333	74732	114401	181042
	23-0	1377	2120	3424	4964	7790	12138	17211	28805	46740	63407	120474	184424	291854
125	120	567	872	1409	2042	3205	4994	7081	11852	19232	26090	49570	75883	120086
	115	787	1211	1956	2836	4450	6934	9832	16456	26703	36225	68827	105362	166736
	110	946	1456	2351	3409	5350	8335	11819	19781	32098	43543	82732	126649	200424
	90	1335	2055	3320	4814	7554	11771	16690	27933	45325	61488	116827	178842	283021
	31-0	1661	2556	4130	5987	9395	14639	20757	34741	56372	76473	145299	222428	351995
150	145	612	942	1522	2206	3462	5395	7649	12803	20774	28182	53545	81969	129717
	140	852	1312	2119	3072	4821	7512	10651	17827	28927	39241	74559	114136	180623
	135	1027	1581	2555	3704	5812	9056	12841	21492	34874	47309	89887	137602	217757
	110	1544	2377	3840	5568	8738	13614	19304	32309	52425	71119	135127	206856	327352
	40-0	1943	2992	4833	7006	10995	17131	24290	40655	65968	89491	170033	260291	411915
175	170	654	1006	1626	2357	3699	5763	8172	13677	22193	30107	57203	87567	138577
	165	912	1404	2268	3289	5161	8042	11403	19084	30967	42009	79818	122187	193363
	160	1102	1697	2741	3973	6236	9716	13776	23057	37414	50755	96434	147624	233618
	125	1819	2800	4524	6558	10292	16037	22739	38058	61754	83775	159173	243666	385605
	48-0	2223	3423	5529	8016	12580	19601	27793	46517	75480	102396	194552	297825	471312
200	195	692	1065	1721	2495	3915	6101	8650	14478	23493	31870	60553	92696	146694
	185	1170	1802	2911	4220	6622	10318	14630	24487	39733	53901	102413	156776	248100
	150	1957	3012	4866	7054	11070	17249	24458	40935	66422	90108	171205	262085	414753
	56-0	2500	3849	6217	9013	14145	22040	31251	52305	84722	115136	218758	334881	529954
250	245	762	1173	1895	2747	4312	6718	9526	15943	25870	35095	66681	102077	161538
	235	1295	1993	3220	4668	7326	11415	16185	27089	43955	59629	113295	173435	274463
	200	2203	3392	5479	7943	12466	19424	27541	46095	74796	101468	192789	295126	467041
	73-0	3050	4696	7585	10996	17257	26889	38127	63812	103544	140466	266886	408556	646545

Based on 10% (2 psi minimum) accuracy of regulation.

RATED STEAM CAPACITY TABLE

TYPE E5 MAIN VALVE - NORMAL PORT

Pounds of Saturated Steam per Hour

PRESSURE-psig		VALVE SIZE (inches)												
INLET	REDUCED	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	5	6	8	10	12
20	15	213	374	501	741	936	1310	2208	4490	6586	8532	13696	19646	35624
	10	279	490	656	969	1224	1713	2888	5875	8616	11162	17918	25702	46606
	0	331	580	777	1149	1451	2031	3423	6963	10212	13229	21236	30461	55237
25	10	229	402	538	796	1005	1406	2371	4822	7072	9161	14706	21095	38252
	15	303	531	712	1052	1328	1860	3135	6377	9352	12115	19448	27897	50587
	10	345	606	812	1199	1514	2120	3573	7268	10660	13809	22167	31797	57659
	0	379	665	892	1317	1663	2329	3926	7984	11710	15170	24352	34931	63341
30	25	244	427	573	846	1068	1496	2522	5129	7522	9745	15643	22438	40688
	20	325	570	764	1128	1425	1995	3362	6838	10030	12993	20857	29918	54251
	15	374	656	878	1298	1639	2295	3868	7867	11538	14948	23995	34419	62413
	0	426	748	1002	1480	1869	2616	4410	8970	13156	17044	27359	39245	71164
40	35	270	474	635	938	1184	1657	2794	5683	8335	10797	17332	24862	45083
	30	364	639	856	1265	1597	2236	3769	7665	11242	14563	23378	33534	60808
	25	424	744	997	1474	1861	2605	4392	8932	13101	16971	27243	39078	70862
	2-0	517	907	1215	1796	2267	3174	5351	10883	15961	20677	33192	47611	86335
50	45	294	515	690	1020	1287	1802	3038	6179	9063	11741	18847	27034	49022
	40	399	700	938	1386	1750	2450	4130	8399	12319	15959	25618	3674	66636
	35	469	823	1102	1629	2057	2879	4854	9872	14478	18756	30108	43188	78315
	5-0	607	1065	1427	2109	2662	3727	6283	12779	18743	24280	38976	55908	101381
75	70	344	604	810	1196	1510	2115	3565	7250	10633	13775	22113	31719	57517
	65	474	831	113	1645	2077	2908	4901	9969	14621	18941	30406	43614	79088
	60	563	988	1325	1957	2471	3460	5832	11862	17397	22537	36178	51894	94102
	13-0	829	1455	1950	2881	3638	5093	8585	17461	25609	33175	53255	76390	138521
100	95	387	680	911	1345	1699	2378	4009	8154	11960	15493	24871	35675	64691
	90	536	940	1260	1862	2351	3291	5548	11284	16549	21439	34415	49365	89516
	85	642	1126	1509	2230	2816	3942	6645	13515	19822	25679	41222	59129	107221
	20-0	1049	1840	2465	3642	4599	6439	10854	22075	32377	41943	67330	96580	175132
125	120	425	746	999	1477	1865	2610	4400	8950	13127	17005	27298	39157	71004
	115	591	1036	1389	2052	2591	3627	6114	12434	18237	23625	37925	54401	98646
	110	710	1246	1670	2468	3116	4362	7353	14956	21935	28416	45616	65432	118650
	90	1006	1765	2365	3494	4412	6177	10412	21177	31060	40236	64590	92650	168005
150	28-0	1265	2219	2974	4394	5549	7768	13095	26633	39062	50602	81230	116519	211288
	145	459	806	1079	1595	2014	2820	4753	9667	14178	18367	29484	42293	76692
	140	640	1122	1504	2222	2806	3928	6622	13468	19752	25588	41076	58920	106842
	135	772	1354	1814	2680	3384	4738	7987	16245	23826	3065	49547	71071	128875
175	110	1163	2041	2735	4041	5102	7143	12041	24490	35919	46532	74696	107145	194290
	36-0	1480	2596	3479	5140	6490	9086	15317	31153	45692	59191	95018	136296	247150
	170	491	861	1153	1704	2151	3012	5077	10327	15146	19621	31496	45179	81925
	165	685	1201	1610	2379	3003	4205	7088	14415	21143	27389	43967	63068	114363
200	160	828	1452	1946	2875	3630	5082	8567	17424	25556	33106	53144	76232	138233
	125	1371	2405	3223	4762	6013	8418	14190	28861	42329	54835	88025	126266	228962
	44-0	1693	2971	3981	5882	7427	10397	17527	35647	52283	67730	108725	155958	282803
	195	519	977	1221	1804	2277	3188	5374	10931	16032	20769	33339	47823	86719
250	185	879	1542	2066	3053	3855	5396	9097	18502	27136	35153	56430	80945	146780
	150	1474	2585	3464	5119	6463	9048	15253	31023	45500	58943	94620	135725	246114
	52-0	1904	3340	4476	6614	8351	11691	19708	40084	58790	76160	122257	175369	318002
	245	572	1003	1344	1986	2508	3511	5918	12036	17653	22869	36711	52659	95488
250	235	972	1705	2285	3376	4263	5968	10061	20463	30012	38880	62412	89526	162340
	200	1658	2909	3898	5759	7272	10180	17161	34904	51192	66317	106456	152703	276902
	67-0	2323	4075	5460	8068	10187	14262	24042	48900	71720	92910	149145	213937	387939

Based on 10% (2 psi minimum) accuracy of regulation.


RATED STEAM CAPACITY CHART

TYPE C34 PILOT OPERATED MAIN VALVE

(Specific Gravity of 1)

C34 WATER CAPACITY

ASSUME SUBCRITICAL FLOW

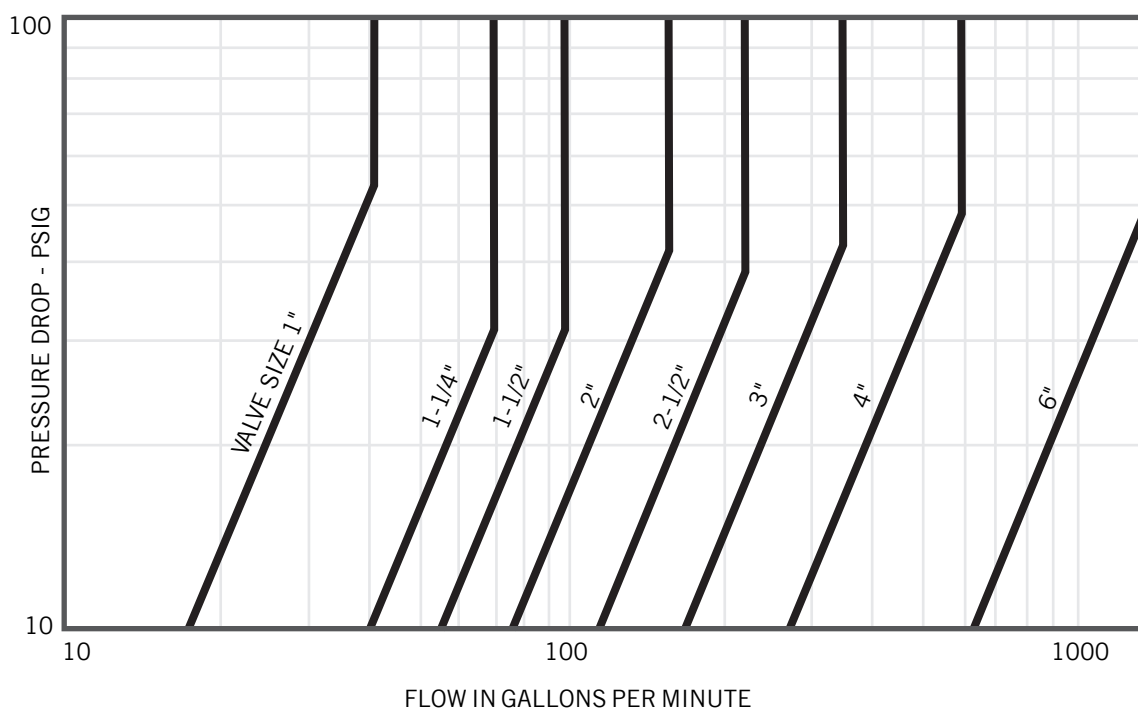

VALVE SIZE SELECTION.....

Prior to selecting valve size, the maximum required flow and the pressure drop across the valve must be determined. Enter the Capacity Chart at the maximum required flow GPM and follow vertically to the intersection of the horizontal pressure drop line. The valve size nearest to, but to the right of this intersection is the smallest valve that will satisfy the flow requirements.


The vertical portion of the curves indicate the flow at which 15 feet per second velocity is reached. By selecting the next larger size valve, a lower velocity may be maintained. For general service, 8 to 10 feet per second is recommended.

EXAMPLE.....

Required maximum flow is 100 GPM, Inlet Pressure is 60 psi, Delivery Pressure is 35 psi (Pressure drop is 25 psi). Enter the Capacity Chart at the 100 GPM line and follow up to 25 psi pressure drop. It falls to the right of the 1 1/2" valve size line, therefore 2" is the minimum valve size required.

RATED WATER CAPACITY CHART

TYPE N6 DIFFERENT PRESSURE VALVE

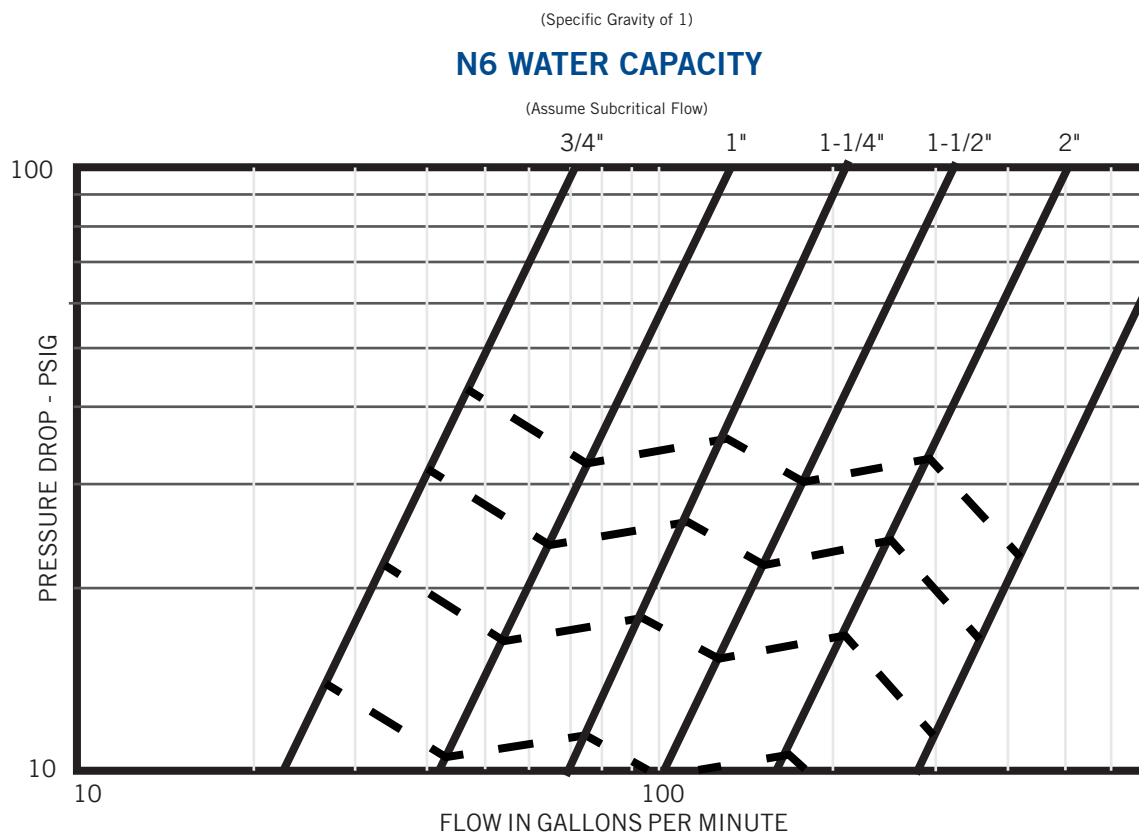

RATED WATER CAPACITY CHART

TYPE N6 DIFFERENT PRESSURE VALVE

WATER IN GPM

PRESSURE DROP-psig	VALVE SIZE (inches)								
	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6
5	7.4	17	23	32	48	71	116	188	263
10	10	24	33	45	68	101	164	266	373
15	13	29	40	55	84	124	201	325	457
20	15	33	47	64	97	143	233	376	528
30	18	41	51	79	118	175	285	460	646
50	23	53	74	102	153	226	368	594	834
75	29	65	90	125	187	277	450	727	1022
100	33	75	104	144	216	320	520	840	1180
125	37	84	116	161	241	358	581	939	1320
150	40	92	127	176	265	392	637	1029	1445
175	44	100	138	190	285	423	688	1111	1560

SIZING D36 WATER PRESSURE REDUCING VALVE

GENERAL CONSIDERATIONS

When sizing a water valve, the following points should be considered:

- (a) The recommended velocity in the pipe (8-10 ft./sec.)
- (b) The droop which is the fall-off pressure below the no flow pressure setting.

EXAMPLE

SPECIFIED CONDITIONS

Initial Pressure = 100 PSIG
 Reduced No Flow Pressure = 50 PSIG (lock-up pressure)
 Capacity Required = 30 GPM
 Allowable Droop = 10-15 PSIG

1. Enter Capacities vs. Droop Chart, below, at 30 GPM. Move up until you intersect a curve line (possibly more than one curve). e.g. points (a), (b)...etc.

The lowest point indicates the minimum size valve required (3/4") at a droop of approximately 16 psi.

Enter Flow vs. Velocity Chart (left) at 30 GPM and move up until you reach the 3/4" pipe size curve. Move downward and note that the velocity is approximately 18.5 ft./sec., which is unacceptably high.

At the point of intersection of 30 GPM with the next valve curve (1"), the velocity will be approximately 11 ft./sec., which is closer to the recommended value.


Referring back to the Capacities vs. Droop Chart, you will find that the droop for a 1" valve is only 11 psig, which is also more acceptable.

SELECT A 1" TYPE D36

NOTE: The capacities shown in the Capacities vs. Droop Chart are based on a difference of 50 psig or more between the initial pressure and the regulator lock-up pressure. Where this difference is less than 50 psig, deduct 20% from the capacity obtained.


FLOW VS. VELOCITY CHART

(Specific gravity of 1)

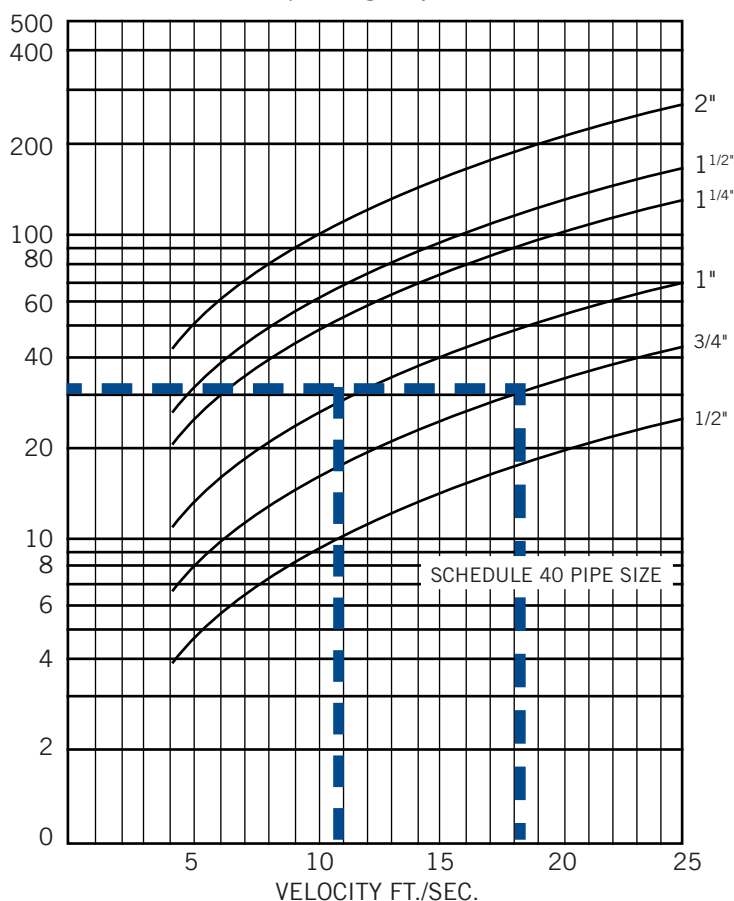

Valve INFO PAGE 100

CAPACITIES VS. DROOP CHART

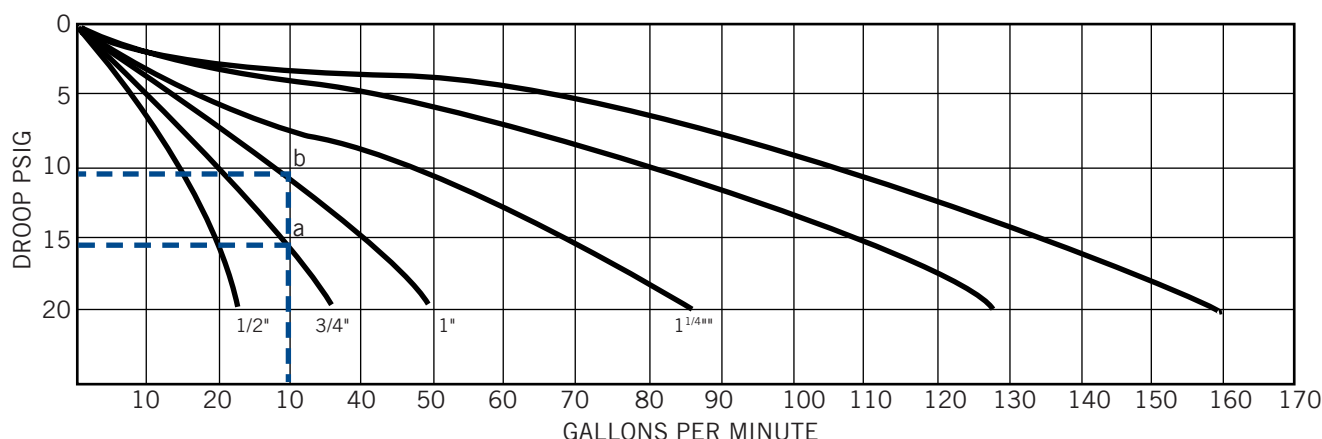

RATED STEAM, AIR AND WATER CAPACITY TABLE

TYPE D50 DIRECT ACTING PRESSURE REGULATION

VALVE SIZE		1/2"			3/4"			1"			1 1/4"			1 1/2"			2"		
PSI		CV 2.2			Cv			4.9			5.0			10.1			10.8		
IN	OUT	S	A	W	S	A	W	S	A	W	S	A	W	S	A	W	S	A	W
10	5	41	14	3	59	20	4.2	80	27	5.7	91	30	6.5	105	35	7.4	120	40	8.5
20	10	68	23	4.2	97	33	6.0	130	44	3.1	150	50	9.2	170	57	10	230	77	14
30		100	35	5.9	145	50	8.5	195	67	11	220	76	13	250	87	15	290	100	17
40		87	29	4.2	125	42	6.0	170	57	8.1	190	64	9	250	85	12	265	89	13
50		130	43	5.9	185	63	8.5	250	84	11	285	95	13	375	125	17	395	130	18
75		200	72	8.8	290	105	13	390	140	17	440	160	19	580	210	25	610	220	27
100		255	98	11	370	140	16	495	190	21	565	215	24	740	285	32	780	295	33
125	30	315	105	13	450	175	19	605	240	25	690	270	28	900	355	37	950	375	39
150		370	145	15	530	210	21	715	285	28	810	325	32	1065	425	42	1120	445	44
175		425	170	16	615	245	23	825	330	31	935	375	35	1230	495	46	1290	520	48
200		480	195	17	695	280	25	930	375	33	1060	430	38	1390	560	50	1460	590	52
250		595	240	20	855	350	28	1150	470	38	1305	535	43	1710	700	56	1800	735	60
60		115	38	4.6	165	55	6.6	250	85	10	260	87	10	355	120	14	395	130	16
75		190	63	7.2	275	92	10	420	140	16	430	145	17	585	195	23	655	220	25
85		230	77	8.5	335	110	12	510	170	19	525	175	20	715	240	27	800	270	30
100		280	96	10	410	140	15	625	215	23	645	220	23	875	300	32	1000	335	35
125	50	340	125	12	500	185	18	760	280	28	785	290	29	1070	390	39	1190	435	43
150		405	155	14	590	225	21	895	340	32	925	350	33	1260	480	45	1400	535	50
175		465	180	16	675	265	23	1030	400	36	1065	415	37	1450	565	50	1620	630	56
200		525	205	18	765	305	26	1170	460	39	1205	475	40	1640	650	55	1830	720	61
250		650	260	20	945	380	30	1440	580	45	1485	595	47	2020	815	65	2260	905	71
85		130	44	4.6	190	64	6.6	290	98	10	300	100	10	410	140	14	455	155	16
100		215	72	7.2	315	105	10	480	160	16	495	165	17	675	225	23	750	250	25
125		325	110	10	470	160	15	720	240	23	740	250	23	1010	340	32	1130	380	35
150	75	405	140	12	590	205	18	895	310	28	925	320	29	1260	440	39	1400	485	43
175		465	170	14	675	245	21	1030	375	32	1065	390	33	1450	530	45	1620	590	50
200		525	200	16	765	290	23	1170	440	36	1205	455	37	1640	620	50	1830	685	56
225		585	225	18	855	330	26	1300	500	39	1345	515	40	1830	705	55	2040	785	61
250		650	250	19	945	370	28	1440	560	42	1485	580	44	2020	790	60	2250	880	66
110		190	65	6	310	105	9	380	125	12	400	135	12	465	155	14	515	170	16
125		310	105	9	500	170	15	620	210	19	655	220	20	755	255	23	840	280	25
150		460	155	13	745	250	21	920	310	26	970	325	28	1120	375	32	1250	415	35
200	100	675	235	19	1095	385	30	1350	475	37	1430	500	39	1650	575	45	1830	640	50
225		755	275	21	1220	445	34	1510	550	41	1590	580	44	1840	665	50	2040	740	56
250		830	310	23	1350	505	37	1670	620	45	1760	655	48	2030	760	55	2250	840	61
135		210	70	5.9	340	115	9.5	420	140	12	440	150	12						
150		340	115	9.3	550	185	15	680	225	19	715	240	20						
175		500	165	13	810	270	21	995	335	26	1050	350	28						
200	125	635	210	16	1030	345	26	1270	425	32	1340	450	34						
225		755	255	19	1230	410	30	1510	505	37	1500	535	39						
250		830	295	21	1350	475	34	1670	585	41	1760	615	44						
160		315	105	8.3	510	170	13	630	210	17	665	225	17						
175		425	145	11	690	230	18	855	285	22	900	300	23						
200	140	580	195	14	940	315	23	1160	390	29	1220	410	30						
225		710	240	17	1150	385	28	1420	475	34	1500	505	36						
250		835	280	19	1350	455	31	1670	560	39	1760	590	41						

S - Steam (#/hr.) A - Air (SCFM) W - Water (GPM)

SIZING D50 DIRECT ACTING PRESSURE REGULATION

EXAMPLE 1 FOR CONDITIONS WITHIN CAPACITY TABLE.....

Given an initial steam pressure of 100 PSIG and a required flow of 500 #/hr. at a reduced pressure of 30 PSIG, determine droop, minimum controllable flow pressure and valve size.

In the Capacity Table opposite, the droop has been fixed at 25% of the maximum range of the adjusting spring. Therefore, for a 30 PSIG delivery pressure, a 25-80 adjusting spring would be selected. Thus, the droop is (25% x 80 = 20) 20 PSI.

Minimum controllable flow pressure = Reduced Pressure + Droop = 30 + 20 = 50 PSIG

Entering the Capacity Table at a minimum controllable flow pressure (OUT) of 50 PSIG, an initial pressure (IN) of 100 PSIG, the smallest valve size capable of delivering 500 #/hr. is the 1" size.

EXAMPLE 2 FOR CONDITIONS OUTSIDE CAPACITY TABLE.....

Given an initial steam pressure of 150 psig and a required flow of 900 #/hr. at a reduced pressure of 25 PSIG, determine the valve size, droop and minimum controllable flow pressure.

$$\frac{P1}{P2} = \frac{(25+14.7)}{(150+14.7)} = \frac{39.7}{164.7} = .24 \text{ thus } P2 = .24P1 < .58P1$$

Therefore, use Critical Flow Cv formula:





$$C_v = \frac{W}{1.71P1} = \frac{900}{1.71(150+14.7)} = \frac{900}{1.71(164.7)} = 3.2$$

Referring to the Cv line of the Capacity Table opposite, the 3/4" valve size ($C_v = 3.3$) is the smallest valve with the required capacity.

Droop is a function of valve size (3/4"), regulator capacity in percent [(3.2 ÷ 3.3) x 100 = 97%] and adjusting spring range (10-30). Enter the 3/4" Valve Droop Chart (below) at 97% and draw a line upward until you intersect the 10-30 curve. From there, draw a line left to the vertical axis. Droop in this case is 11 PSIG.

Minimum Controllable Flow Pressure = Reduced Pressure + Droop = 25 + 11 = 36 PSIG

Repeating the above procedure substituting a 1" valve size with a maximum Cv of 4.9, droop would be 8 PSIG and minimum controllable flow pressure would be 33 PSIG.

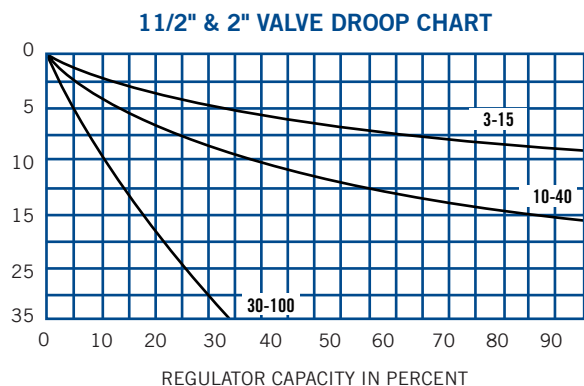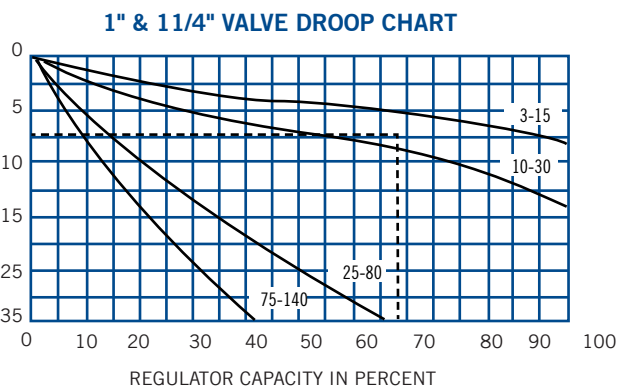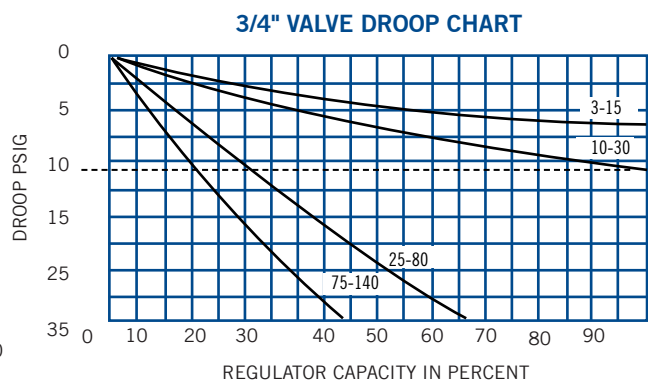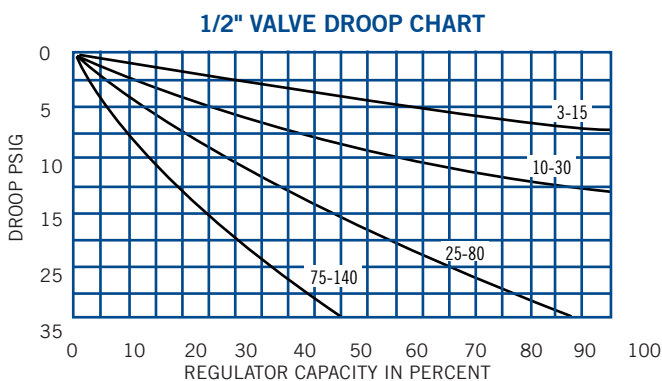


SECTION II CONTROL VALVES

TYPE J CONTROL VALVE

APPLICATIONS

- Process control systems for food, pulp and paper, chemical, petrochemical & other industries
- HVAC systems
- Feed water and fuel system controls in boiler rooms
- Packaged systems (OEM) such as heat exchangers, water purification systems & vaporizer, metal cleaning and plating

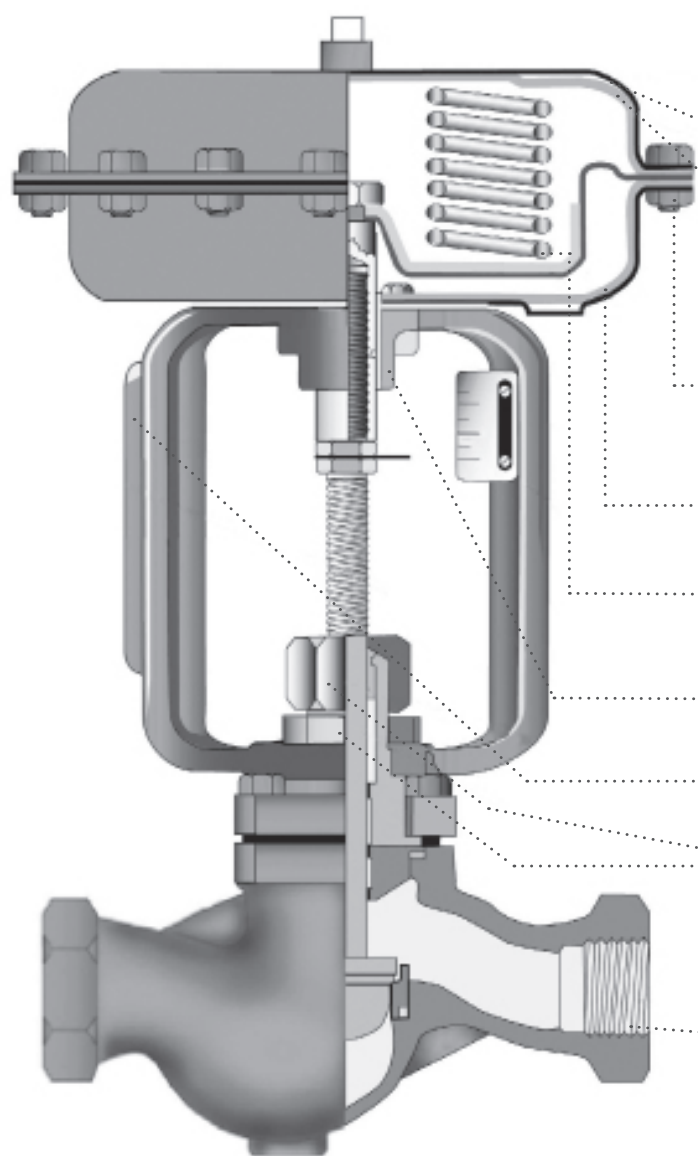

Pressures to 1440 PSIG Temperatures to 600°F

High-thrust, Compact Actuator

Offers the muscle required to positively position the plug in response to control signal

36 & 60 Inch Actuator

Sizes match different operating conditions

Bolted Diaphragm Joint

For maximum strength, ease of maintenance and high-pressure tightness

Molded, Reinforced Rolling Diaphragm

Provides dependable, accurate control

Corrosion-protected Multiple Springs

For lower hysteresis and positive shutoff with 3-15 psi signal

Low-friction Actuator Stem Guiding

For accurate repetitive positioning

Mounting Pad NEMUR 4 Compliant

Drilled and tapped for accessories

Super finished Stem

Reduces friction, extends packing life

High Performance, Low Friction Packing

Selections to meet your system requirements

High-capacity Streamlined Body

Minimizes turbulence and pressure drop

CONTROL VALVES


SERIES K CONTROL VALVE

APPLICATION DATA

- Process control systems for food, pulp and paper, chemical, petrochemical & other industries
- HVAC systems
- Feed water and fuel system controls in boiler rooms
- Packaged systems (OEM) such as heat exchangers, water purification systems & vaporizer, metal cleaning and plating
- Mixing or diverting applications



K1 CONTROL VALVE



PLUG CHARACTERISTICS

Modified Equal Percent, 30:1 flow range ability

SIZE 1/2" - 4" ANSI CLASS 1 25/250

- **Shutoff to 400 PSI without Positioner** for broad range of applications.
- **Ultra Compact Multi-spring Pneumatic Actuator** installs in tight spaces.
- **3-15 lb. Spring Ranges** in durable epoxy coated pneumatic actuators accommodate most standard input devices.
- **Powerful Electric Actuator** accepts a wide variety of signals while providing highest shutoff in it's class.
- **Live Loaded V ring Packing Assembly** is self adjusting.
- **Stainless Steel Valve Plugs & Seat Rings** resist wear and corrosion
- **Optional 3-Way** Body for mixing or diverting

MODELS.....

- Type K1 - Single Seat Bronze w/union ends & Pneumatic Actuator
- Type K3 - 3-Way Bronze w/union ends & Pneumatic Actuator
- Type K4 - Single Seat Flanged Cast Iron w/Pneumatic Actuator
- Type K5 - Same as K1 w/Electric Actuator, fail closed
- Type K6 - Same as K1 w/Electric Actuator, fail open
- Type K7 - Same as K3 w/Electric Actuator

OPTION.....

- 36 or 60 sq. in. Pneumatic Actuator
- Electric Actuator

APPLICABLE CODES

- Meets or exceeds ANSI B16.15 Class 250 or ANSI B16.1 Class 125
- ANSI/FCI 70-2 Class IV Seat Leakage

SERIES K VALVE ORDERING CODE

Model		Orifice Scale	Valve Size	Connections	Trim Material	packing	Actuator		Spring		Positioner		Posit. Set		Accessories			
K	1	T	E	8	1	1	-	3	6	R	B	M	-	P	0	2	0	1
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17		

Model - Position 1 & 2 k1 = Bronze, Pneumatic k3 = Bronze, 3 Way, Pneumatic k4 = Cast Iron, Pneumatic K5 = Bronze, Electric, FC K6 = Bronze, Electric, FO K7 = Bronze, 3 Way, Electric	Valve Size - Position 4 C = 1/2 D = 3/4 E = 1 F = 1 1/4 G = 1 1/2 H = 2 J = 2 1/2 M = 4	1 = Metal Packing - Position 7 1 = V-ring Actuator - Position 8 & 9 K1, K3, K4 only 01 = None 36 = 36 sq. in. 60 = 60 sq. in. K5, K6, K7 only 90 = 0-10vDC 91 = 4-20mA	92 = 0-135ohm Spring - Position 10 & 11 All except K4 DA = Dir 36 DC = Dir 36 DD = Dir 36 DG = Dir 60 FM = Dir 36 RA = Rev 36 RB = Rev 36 RC = Rev 36 RD = Rev 36 RE = Rev 36 DF = Dir 60 DG = Dir 60 RG = Rev 60 K4 only DH = Dir 60 RH = Rev 60 RQ = Rev 60	RT = Rev 60 Positioner - Position 12 & 13 "MS = Smart HART" "MT = Smart Profibus" A = None MI = Moore I/P MP = Moore P 4P = PMV P4 P 5I = PMV P5 I/P 5P = PMV P5 P Positioner Set Position 14 & 15 01 = None 02 = 8-15/4-20 mA 03 = 3-9/4-12mA 04 = 9-15/12-20 mA Accessories - Position 16 & 17 01 = None 02 = Limit Switch, Mechanical 03 = Limit Switch, Proximity Sw. 04 = Feedback Potentiometer 1K 05 = Feedback 4-20mA Posit. Tra
Orifice Size - Position 3 A B C E T	Connections - Position 5 2 = 125 Flg 8 = unions Trim Material - Position 6			

SERIES K

CONTROL VALVE

APPLICATION DATA

Valve shall be pneumatically or electrically actuated, have a bronze or cast iron body and meet ANSI 816.15 Class 250 or ANSI 816.1 Class

125 accommodating pressures to 400 PSIG. Guiding shall be low friction utilizing spring loaded self adjusting chevron type Teflon packing, burnished stem and double guided stainless steel monolithic disc assembly. Valve trim shall be erosion resistant stainless steel with a modified equal percent flow characteristic capable of exceeding ANSI/FCI 70-2 Class IV shut off. Valve connections shall be female NPT with integral galvanized cast iron unions or flanged.

Pneumatic actuator shall be 36 sq. in. Or 60 sq. in. and have a high

Thrust multi spring diaphragm. Actuator components shall be stainless steel and epoxy coated. Fixed 3-15 pound springs shall be utilized to accommodate standard controller outputs without a positioner.

The electric actuator shall accept 0-10 VDC, 4-20 mA or 0-135 ohm

Input signal. Spring shall return to initial position on loss of signal. Actuator shall have manual override. It shall close to 400 psi. Enclosure shall meet NEMA 1.

MATERIALS OF CONSTRUCTION


Body K1, K3, K5, K6, K7..... Bronze ASTM 862
K4..... Cast Iron ASTM A126 CL B
Bonnet K4..... DI ASTM A536 65-45-12
Seat K1, K3, K5, K6, K7..... 303 SS ASTM A276
K4..... 420 SS ASTM A743
Plug/Stem Assy K1, K3, K5, K6, K7..... 303 SS ASTM A276
Plug K4..... 420 SS ASTM A743
Stem..... 303SS ASTM A582
Stem Guide - Body K1, K3, K5, K6, K7 301..... SS/Monel/Brass
Actuator Casing K1, K3, K4..... Steel SAE 1006 - 1008/Epoxy
K5, K6, K7..... Powder Coated Aluminum
Actuator Spring K1, K3, K4..... Music Wire ASTM A228
Diaphragm K1, K3, K4..... Nitrile/Polyester
Yoke K1, K3, K4..... D Iron ASTM A536/Epoxy
K5, K6, K7..... Powder Coated Aluminum

MAXIMUM RATED FLOW COEFFICIENTS* (CV)

VALVE	VALVE SIZE								
	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
2-WAY	5.2	7	11	20	25	30	71	94	146
3-WAY	5.4	6.4	8.7	19.5	24	34	--	--	--

K1, K4, K5 & K6 DIMENSIONS INCHES (MM) AND WEIGHTS POUNDS (KG)

SIZE	A	B	C	D	WEIGHT	
					36 IN ²	60 IN ²
1/2-3/4 (15)-(20)	3 5/8 (92)	-3 5/16 (84)	4 1/8 (105)	2 7/8 (73)	28 (13)	--
1 (25)	35/8 (92)	3 5/16 (84)	4 1/8 (105)	2 7/8 (73)	28 (13)	--
1 1/4 (32)	4 11/16 (119)	4 11/8 (105)	4 11/16 (119)	3 1/8 (79)	35 (16)	42 (22)
1 1/2 (40)	4 11/16 (119)	4 11/8 (105)	4 11/16 (119)	3 1/8 (79)	37 (17)	50 (23)
2 (50)	4 7/8 (124)	4 11/8 (106)	4 5/8 (125)	3 1/8 (79)	42 (19)	55 (25)

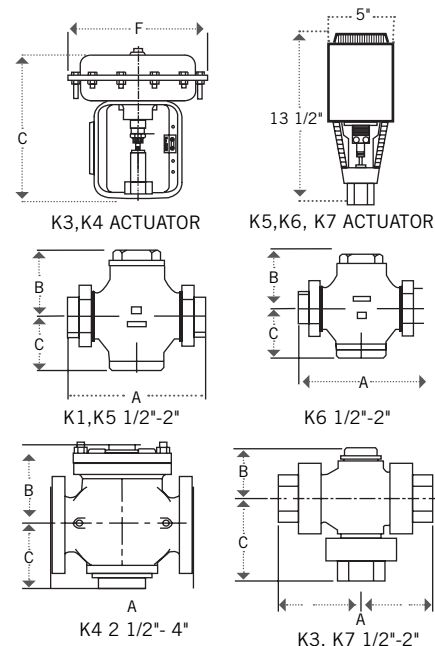

PNEUMATIC ACTUATOR DIMENSIONS INCHES (MM)

SIZE	E		F	
	39 IN ²	60 IN ²	36 IN ²	60 IN ²
1/2-3/4 (15)-(20)	9 7/8 (251)	--	9 1/4 (235)	--
1 (25)	9 7/8 (251)	11 3/4 (298)	9 1/4 (235)	11 1/4 (286)
1 1/2-1 (32)-(40)	9 7/8 (251)	11 3/4 (298)	9 1/4 (235)	11 1/4 (286)
2 (50)	9 7/8 (251)	11 3/4 (298)	9 1/4 (235)	11 1/4 (286)
2 1/2 (65)	--	11 3/4 (302)	--	11 1/4 (286)
3 (80)	--	11 3/4 (302)	--	11 1/4 (286)
4 (100)	--	11 3/4 (302)	--	11 1/4 (286)

K3, K7 DIMENSIONS INCHES (MM) AND WEIGHTS POUNDS (KG)

SIZE	B	B	C	WEIGHT		
				K1, K4 36IN ²	K1, K4 60IN ²	K5, K6
1/2-3/4 (15)-(20)	2 1/5 (50)	11 1/16 (43)	11/16 (30)	21 (9.5)	--	13 (6)
1 (25)	7 3/16 (183)	2 7/8 (73)	2 5/16 (58)	25 1/2 (11.6)	39 (17)	17 1/2 (8)
1 1/4-1 1/2 (32)-(40)	8 7/8 (226)	3 1/8 (79)	2 7/8 (74)	31 1/2 (14.3)	45 (20)	23 1/2 (11)
2 (50)	8 7/8 (226)	3 1/8 (79)	2 7/8 (74)	33 1/2 (15.3)	47 (21)	25 1/2 (12)
2 1/2 (80)	9 3/8 (238)	5 1/4 (133)	3 7/8 (118)	--	72 (33)	--
3 (80)	10 (254)	6 3/8 (155)	4 5/8 (136)	--	84 (39)	--
4 (100)	11 3/8 (302)	7 1/4 (181)	4 1/2 (187)	--	145 (66)	--

Control Tip: Pair with Airmaster Pneumatic Temperature Controller for local temperature control. SEE PAGE 79.

K1,K4,K5,K6

ACTUATOR SHUTOFF TABLE

(Refer to Temperature Limits)

Size	Orifice	Act.	Bench Range	Actuator Code	Reverse Shutoff, K1,K4*			Bench Range	Actuator Code	Direct Shutoff, K1,K4*			Shutoff, K5,K6
					3-15 psi	0-20 psi,	0-30 psi,			3-15 psi	0-20 psi,	0-30 psi,	
	B	36	6-15	RA	400	400	-	3-12	DA	400	400		400
			6-15	RA	400	400	-	3-12	DA	300	400		
		36						3-9	DB	400	400		
			6-15	RA	300	400		3-9	DB	400	400		
3/4	T	36	6-15	RA	100	300		3-9	DB	250	400		400
			9-15	RR	225	350							
			12-15	RC	300	400							
		60	12-15	RC	400	400		3-7	DG	400	400		
1	T	36	9-15	RB	150	250		3-9	DB	100	200		330
			12-15	RC	250	400							
			13-15	RE	400	400							
		60						3-7	DG	400	400		
1 1/4	T	36	9-15	RB	150	175		3-9	DR	150	250		210
			12-15	RC	200	250							
			13-15	RE	250	275						-	
		60	12-15	RG	300	400		3-7	DG	300	400		
1 1/2	T	36	12-15	RC	150	225					--		161
			13-15	RE	200	250							
			12-15	RG	225	275		3-7	DG	200	400		
		60	13-15	RH	275	300							
2	T	36	12-15	RC	50	75							121
			13-15	RE	75	100							
			12-15	RG	125	200		3-7	DG	100	300		
		60	13-15	RH	175	250							
2 1/2	T	60	10-15	RH	75		100	3-8	DH	70		200	-
			12-15	RQ	125	-	125	3-8	DH	70		200	
			22-30	RT			125	3-8	DH	70		200	
3	T	60	10-15	RH	40		60	3-8	DH	40		100	-
			12-15	RQ	60		80	3-8	DH	40		100	
			22-30	RT			110	3-8	DH	40		100	
4	T	60	12-15	RQ	20		32	3-8	DH	10		25	-
			22-30	RT			50	3-8	DH	10		25	

* Shutoff pressures are in conformance with ANSI/FCI 70-2 Class IV

Reverse Acting - Fail Closed/Air to Open (FC/ATO)

Direct Acting - Fail Open/Air to Close (FO/ATC)

+ Based on 20 psi air supply.

+ Based on 30 psi air supply.

K1, K4, K5, K6 CV TABLE

PERCENT OF TRAVEL			5	10	20	30	40	50	60	70	80	90	100
Valve Size	Travel	Orifice	Cv										
1/2	1/4	C	0.1	0.2	0.3	0.36	0.41	0.46	0.51	0.56	0.6	0.65	0.7
		E	0.3	0.5	0.7	0.9	1.1	1.3	1.5	1.7	1.9	2	2.1
		A	0.3	0.6	1.2	1.7	2.2	2.6	2.9	3.1	3.2	3.25	3.3
		B	0.15	0.25	0.65	1.5	2.7	3.3	3.7	3.9	4.1	4.2	4.3
		T	0.7	1.2	2.0	2.7	3.2	3.8	4.3	4.7	4.9	5.1	5.2
3/4	5/16	T	0.7	1.3	2.4	3.3	4.2	4.9	5.5	6.0	6.4	6.8	7.0
1	1/4	T	0.7	1.3	2.4	3.8	5.5	7.4	9.0	10.0	10.6	10.9	11.0
1-1/4	5/16	T	0.8	1.7	4.0	6.5	9.3	12.6	15.3	17.0	18.1	19.1	20.0
1-1/2	5/16	T	1.0	2.0	4.5	7.2	9.9	12.4	15.2	18.2	20.9	23.4	25.0
2	5/16	T	1.0	2.0	4.5	7.4	10.6	15.1	18.8	22.8	26.1	28.3	30.0
2-1/2	3/4	T	5	11	23	36	46	53	59	62.5	65.7	68	71
3	3/4	T	5	11	30	47	61	72	79	85	90	92	94
4	3/4	T	12	23	46	69	89	104	116	127	134	140	146

K3, K7 ACTUATOR SHUTOFF TABLE

SIZE	ACT SIZE	BENCH RANGE	ACTUATOR	K3 REVERSE SHUTOFF*		BENCH RANGE	ACTUATOR CODE	K3 DIRECT SHUTOFF*		K7 SHUTOFF
				3-15 PSI	0-20 PSI			3-15 PSI	0-20 PSI	
1/2	36	5.5 - 12.5	RA	125	300	4.5 - 13.5	DM	85	400	400
		6.5 - 11.5	RB	175	375	6 - 12	DA	175	400	
		8 - 11	RC	250	400	-	-	-	-	
3/4	36	5.5 - 12.5	RA	125	300	4.5 - 13.5	DM	85	400	400
		6.5 - 11.5	RB	175	375	6 - 12	DA	175	400	
		8 - 11	RC	250	400	-	-	-	-	
1	36	5.5 - 12.5	RA	75	200	4.5 - 13.5	DM	60	250	295
		6.5 - 11.5	RB	125	250	6 - 12	DA	125	300	
		8 - 11	RC	200	300	-	-	-	-	
1 1/4	36	5.5 - 12.5	RC	60	125	6 - 12	DC	80	200	185
		7.5 - 10.5	RE	110	200	7 - 11	DD	100	225	
		7.5 - 12	RG	200	300	7 - 11	DG	175	xx	
		8 - 11	RH	225	350	-	-	-	-	
1 1/2	36	5.5 - 12.5	RC	50	100	6 - 12	DC	60	150	145
		7.5 - 10.5	RE	85	150	7 - 11	DD	75	175	
		7.5 - 12	RG	125	250	7 - 11	DG	135	xx	
		8 - 11	RH	175	275	-	-	-	-	
2	36	5.5 - 12.5	RC	35	75	6 - 12	DC	45	100	105
		7.5 - 10.5	RE	70	100	7 - 11	DD	60	135	
		7.5 - 12	RG	75	175	7 - 11	DG	100	xx	
		8 - 11	RH	125	200	-	-	-	-	


* Lower Part (B) Fail Closed

** Upper Part (A) Fail Closed

K3, K7CV TABLE

PERCENT OF TRAVEL			0	10	20	30	40	50	60	70	80	90	100
VALVE SIZE	TRAVEL (IN)	PORT	CV										
1/2	7/32	Lower	0	0.9	1.9	2.7	3.6	4.3	4.8	5.2	5.3	5.35	5.4
		Upper	5.6	5.55	5.5	5.3	4.9	4.5	3.9	3.1	2.2	1.2	0
3/4	7/32	Lower	0	0.9	2	3	4	4.9	5.5	6	6.2	6.3	6.4
		Upper	7.1	7	6.9	6.5	5.9	5.2	4.4	3.4	2.3	1.2	0
1	7/32	Lower	0	0.8	1.7	2.9	4	5.3	6.2	7.2	7.8	8.4	8.7
		Upper	9.2	8.5	7.9	7.1	6.2	5.3	4.2	3.2	2.1	1.1	0
1-1/4	1/2	Lower	0	2.7	6.2	10.2	15	18.8	20	20.8	21.2	21.6	22
		Upper	19.5	19	18.5	17.5	15.5	13.5	11	8	5	2.5	0
1-1/2	1/2	Lower	0	2	6	11	16	20	22.5	24.5	26	27	28
		Upper	24	23	22	20	18	15	12	9	6	2.7	0
2	1/2	Lower	0	2.2	5.7	10.9	16	21	24	27.4	30	32	34
		Upper	35	32.4	30	27	23.5	20	16	12	8	4	0

K3, K7 OPERATION

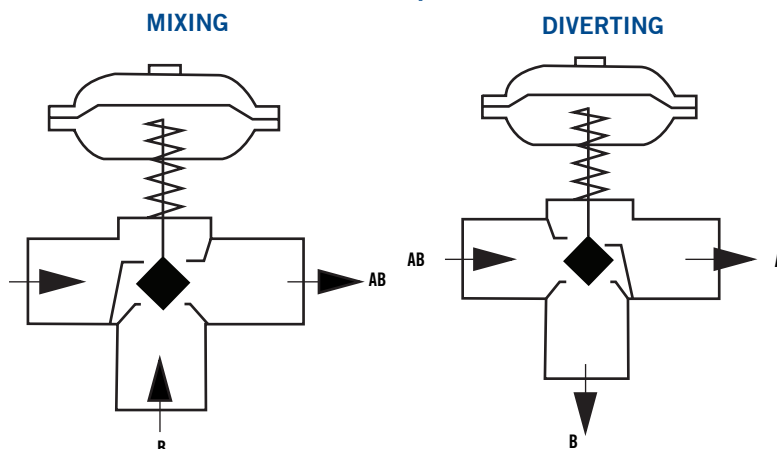

When used for mixing service, the forces developed by the two inlet flows oppose each other, creating little, if any, unbalance. Thus, the actuator can control the flow efficiently with very little power lost in overcoming dynamic unbalance.

When used for diverting service, simply reverse the valve installation

K1, K4, K5, K6

SATURATED STEAM CAPACITY TABLE

(Modified Equal Percent Contour Plug) (Lb/Hr)

Steam Capacity Table

Pressure (PSI)		Valve Size and Port												
P1	P2	1/2"C	1/2"E	1/2"A	1/2"B	1/2"T	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
10	5	22	65	102	133	161	217	341	620	775	930	2237	2962	4601
	0	27	81	128	166	201	270	425	773	966	1159	2846	3768	5853
15	10	24	72	114	148	179	241	379	689	861	1033	2477	3280	5094
	5	31	92	145	189	229	308	484	880	1099	1319	3216	4257	6613
	0	34	101	159	207	250	337	529	962	1202	1443	3586	4748	7374
20	15	26	79	124	161	195	262	412	750	937	1125	2692	3565	5537
	10	34	102	161	209	253	341	536	974	1217	1461	3543	4691	7286
	0	40	119	187	243	294	396	623	1132	1416	1699	4262	5643	8765
30	25	30	90	142	184	223	300	472	858	1072	1287	3072	4067	6316
	15	46	137	215	280	338	455	715	1301	1626	1951	4755	6295	9778
	0	51	152	239	312	377	507	797	1450	1812	2174	5525	7315	11362
40	25	52	156	245	319	385	519	815	1482	1852	2223	5384	7128	11071
	15	59	178	280	365	442	595	935	1699	2124	2549	6297	8337	12948
	0	62	185	290	378	457	615	967	1758	2198	2637	6724	8903	13827
50	35	57	172	271	353	427	575	903	1643	2053	2464	5943	7869	12222
	30	63	190	299	389	470	633	995	1809	2262	2714	6596	8732	13563
	25	67	202	318	414	501	674	1059	1925	2406	2888	7076	9368	14550
	2-0	72	217	341	444	537	723	1136	2066	2582	3099	7905	10466	16256
60	45	63	188	295	384	464	625	982	1786	2232	2679	6444	8531	13250
	40	69	208	327	426	515	693	1090	1981	2477	2972	7194	9524	14792
	35	74	223	351	457	552	744	1169	2125	2656	3187	7767	10282	15971
	4-0	83	249	391	509	616	829	1303	2370	2962	3555	9067	12005	18645
75	55	77	232	365	476	575	774	1216	2212	2765	3318	7996	10587	16443
	50	84	251	395	514	622	837	1315	2391	2989	3587	8690	11505	17870
	45	89	266	417	544	658	885	1391	2530	3162	3795	9246	12241	19013
	8-0	99	296	466	607	734	988	1552	2822	3527	4233	10797	14294	22202
100	75	97	291	457	596	721	970	1525	2773	3466	4159	10020	13266	20604
	60	113	340	534	696	841	1133	1780	3236	4045	4854	11845	15683	24358
	15-0	125	375	589	767	927	1249	1962	3567	4459	5351	13649	18071	28068
125	100	109	326	512	667	806	1086	1706	3102	3877	4652	11169	14787	22968
	75	138	413	649	845	1022	1376	2163	3933	4916	5899	14409	19077	29630
	21-0	151	452	710	925	1119	1507	2367	4304	5381	6457	16470	21806	33869
150	125	119	356	560	730	882	1188	1866	3394	4242	5090	12192	16142	25071
	100	153	460	723	943	1140	1535	2412	4385	5481	6577	15975	21150	32850
	28-0	176	529	831	1082	1309	1762	2769	5035	6293	7552	19264	25505	39614
175	150	128	384	604	787	951	1281	2013	3659	4574	5489	13124	17376	26988
	125	168	503	791	1030	1246	1677	2635	4791	5989	7187	17388	23021	35755
	100	189	567	891	1161	1403	1889	2969	5398	6747	8097	19859	26293	40838
	35-0	202	605	951	1239	1498	2016	3168	5761	7201	8641	22031	29168	45304
200	150	181	542	852	1110	1342	1806	2839	5161	6452	7742	18677	24728	38407
	125	206	618	971	1265	1529	2059	3235	5882	7353	8823	21533	28509	44279
	41-0	227	681	1069	1393	1685	2268	3565	6481	8101	9722	24799	32833	50996
225	175	193	578	908	1183	1430	1925	3025	5500	6875	8250	-	-	-
	150	221	664	1043	1359	1644	2213	3478	6323	7904	9485	-	-	-
	48-0	252	755	1187	1547	1870	2518	3956	7194	8992	10790	-	-	-
250	200	204	611	960	1251	1512	2036	3199	5817	7271	8725	-	-	-
	150	256	769	1208	1574	1904	2563	4027	7322	9153	10984	-	-	-
	100	275	825	1297	1690	2044	2752	4324	7862	9827	11792	-	-	-
	54-0	277	830	1304	1699	2055	2766	4346	7902	9878	11854	-	-	-

- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv

K1, K4, K5, K6 SATURATED STEAM CAPACITY TABLE

(MODIFIED EQUAL PERCENT CONTOUR PLUG) (KG/HR)

Pressure (BAR)		Valve Size and Port												
P1	P2	1/2"C	1/2"E	1/2"A	1/2"B	1/2"T	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
0.7	0.3	10	31	49	64	78	104	164	298	373	447	1079	1429	2220
	0.2	11	34	53	69	84	113	177	322	402	483	1171	1551	2409
1	0.7	10	31	48	63	76	102	161	292	365	438	1049	1389	2157
	0.5	12	37	59	76	92	125	196	356	445	534	1289	1707	2651
	0.3	14	42	65	85	103	139	218	396	495	594	1448	1918	2978
1.5	1	14	43	67	87	106	142	224	407	508	610	1467	1942	3017
	0.7	17	50	79	103	124	167	263	479	598	718	1746	2312	3591
	0.5	18	53	84	109	132	178	280	508	635	762	1870	2476	3846
2	1.5	16	47	74	97	117	157	247	449	562	674	1616	2139	3323
	1.2	19	56	88	115	139	188	295	536	670	804	1945	2575	3999
	1	20	60	95	124	149	201	316	575	719	862	2100	2781	4319
3	2	24	73	114	149	180	242	381	692	865	1038	2508	3321	5158
	1.0	29	87	137	179	216	291	457	832	1040	1248	3098	4102	6371
	0	32	97	152	198	239	322	506	920	1149	1379	3264	4322	6713
3.5	3.0	20	59	92	120	145	195	307	558	698	838	2000	2647	4112
	2.0	30	89	140	182	221	297	466	848	1060	1272	3099	4103	6373
	1.0	33	99	155	202	245	329	518	941	1176	1412	3531	4675	7261
4	1.0	36	108	170	222	268	361	567	1031	1289	1547	3661	4847	7528
	3.0	28	83	130	169	204	275	432	786	983	1179	2836	3755	5832
	2.0	34	103	162	211	255	344	540	982	1228	1473	3615	4786	7433
5	1.0	37	110	172	224	271	365	574	1044	1305	1566	3942	5219	8105
	3.0	39	118	186	242	293	394	620	1126	1408	1690	4000	5296	8225
	4.0	30	91	144	187	226	305	479	870	1088	1306	3131	4145	6438
7	3.0	39	117	184	239	290	390	612	1113	1392	1670	4069	5387	8367
	2.0	43	128	201	262	317	427	671	1220	1525	1830	4544	6016	9344
	1.0	47	140	220	287	347	467	734	1334	1667	2001	4757	6299	9783
9	5.0	47	140	221	288	348	468	736	1338	1672	2007	4848	6419	9970
	3.0	56	169	265	346	418	563	884	1607	2009	2411	5987	7926	12311
	1.0-0	62	187	293	382	462	622	978	1778	2222	2667	6311	8356	12978
10	7.0	53	160	252	328	397	534	839	1526	1907	2289	5505	7289	11321
	5.0	67	200	314	410	496	667	1048	1906	2382	2859	7015	9288	14425
	1.6-0	77	230	361	470	569	765	1203	2187	2733	3280	7762	10277	15962
12	8.0	56	168	265	345	417	562	882	1605	2006	2407	5780	7652	11885
	5.0	75	224	353	459	556	748	1175	2137	2671	3205	7916	10480	16277
	1.8-0	84	251	395	515	623	838	1317	2395	2994	3592	8502	11256	17483
14	10.0	62	185	291	379	458	616	968	1761	2201	2641	6327	8376	13009
	7.0	85	254	399	520	629	846	1330	2418	3023	3627	8886	11764	18272
	5.0	90	270	425	553	669	900	1415	2573	3216	3859	9633	12753	19808
15	2.4-0	98	294	462	602	728	979	1539	2798	3498	4197	9939	13158	20438
	10.0	87	261	410	535	647	871	1368	2488	3110	3732	-	-	-
	5.0	104	312	491	640	774	1041	1636	2975	3719	4463	-	-	-
17	2.9-0	112	337	530	691	835	1124	1767	3213	4016	4819	-	-	-
	12.0	81	243	383	499	603	812	1275	2319	2898	3478	-	-	-
	5.0	111	332	521	679	821	1105	1737	3158	3948	4737	-	-	-
17	3.1-0	120	359	564	734	888	1195	1878	3415	4269	5123	-	-	-
	15.0	73	219	344	448	542	730	1147	2086	2607	3129	-	-	-
	10.0	115	346	544	709	858	1155	1815	3300	4125	4950	-	-	-
17	5.0	127	380	597	778	941	1266	1990	3619	4523	5428	-	-	-
	3.7-0	133	400	629	819	990	1333	2095	3809	4762	5714	-	-	-

- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv

K1, K4, K5, K6 SATURATED WATER CAPACITY TABLE

(MODIFIED EQUAL PERCENT CONTOUR PLUG) (KG/HR)

Pressure (PSI)		Valve Size and Port												
P1	P2	1/2"C	1/2"E	1/2"A	1/2"B	1/2"T	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
10	5	2	5	7	10	12	16	25	45	56	67	159	210	326
	3	2	6	9	11	14	19	29	53	66	79	188	249	386
15	10	2	5	7	10	12	16	25	45	56	67	159	210	326
	7	2	6	9	12	15	20	31	57	71	85	201	266	413
20	4	2	7	11	14	17	23	36	66	83	99	235	312	484
	15	2	5	7	10	12	16	25	45	56	67	159	210	326
30	10	2	7	10	14	16	22	35	63	79	95	225	297	462
	5	3	8	13	17	20	27	43	77	97	116	275	364	565
40	22	2	6	9	12	15	20	31	57	71	85	201	266	413
	17	3	8	12	16	19	25	40	72	90	108	256	339	526
50	6	3	10	16	21	25	34	54	98	122	147	348	461	715
	25	3	8	13	17	20	27	43	77	97	116	275	364	565
60	20	3	9	15	19	23	31	49	89	112	134	318	420	653
	8	4	12	19	24	29	40	62	113	141	170	402	532	826
75	35	3	8	13	17	20	27	43	77	97	116	275	364	565
	30	3	9	15	19	23	31	49	89	112	134	318	420	653
100	25	4	11	17	22	26	35	55	100	125	150	355	470	730
	10	4	13	21	27	33	44	70	126	158	190	449	595	923
125	50	2	7	10	14	16	22	35	63	79	95	225	297	462
	40	3	9	15	19	23	31	49	89	112	134	318	420	653
150	25	4	12	20	25	31	41	65	118	148	177	420	556	864
	12	5	15	23	30	36	48	76	139	173	208	492	651	1012
200	70	2	5	7	10	12	16	25	45	56	67	159	210	326
	50	4	11	17	22	26	35	55	100	125	150	355	470	730
250	25	5	15	23	30	37	49	78	141	177	212	502	665	1032
	15	5	16	26	33	40	54	85	155	194	232	550	728	1131
300	75	4	11	17	22	26	35	55	100	125	150	355	470	730
	60	4	13	21	27	33	44	70	126	158	190	449	595	923
400	20	6	19	30	38	47	63	98	179	224	268	635	841	1306
	100	4	11	17	22	26	35	55	100	125	150	355	470	730
500	75	5	15	23	30	37	49	78	141	177	212	502	665	1032
	24	7	21	33	43	52	70	111	201	251	301	714	945	1467
600	125	4	11	17	22	26	35	55	100	125	150	355	470	730
	100	5	15	23	30	37	49	78	141	177	212	502	665	1032
750	29	8	23	36	47	57	77	121	220	275	330	781	1034	1606
	150	4	11	17	22	26	35	55	100	125	150	355	470	730
1000	125	5	15	23	30	37	49	78	141	177	212	502	665	1032
	100	6	18	29	37	45	61	95	173	217	260	615	814	1264
1250	34	8	25	39	51	62	83	131	237	297	356	843	1116	1734
	150	5	15	23	30	37	49	78	141	177	212	502	665	1032
1500	100	7	21	33	43	52	70	110	200	250	300	710	940	1460
	39	9	27	42	55	66	89	140	254	317	381	901	1193	1853
2000	175	5	15	23	30	37	49	78	141	177	212	-	-	-
	100	8	23	37	48	58	78	123	224	280	335	-	-	-
2500	43	9	28	45	58	70	94	148	270	337	405	-	-	-
	200	5	15	23	30	37	49	78	141	177	212	-	-	-
3000	150	7	21	33	43	52	70	110	200	250	300	-	-	-
	100	9	26	40	53	64	86	135	245	306	367	-	-	-
4000	48	10	30	47	61	74	99	156	284	355	426	-	-	-
	250	5	15	23	30	37	49	78	141	177	212	-	-	-
5000	150	9	26	40	53	64	86	135	245	306	367	-	-	-
	58	11	33	51	67	81	109	171	311	389	467	-	-	-
6000	350	5	15	23	30	37	49	78	141	177	212	-	-	-
	200	10	30	47	61	74	99	156	283	354	424	-	-	-
7000	77	13	38	59	77	93	126	198	359	449	539	-	-	-

- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv

K1, K4, K5, K6 SATURATED STEAM CAPACITY TABLE

(MODIFIED EQUAL PERCENT CONTOUR PLUG) (KG/HR)

Pressure (BAR)		Valve Size and Port												
P1	P2	1/2"C	1/2"E	1/2"A	1/2"B	1/2"T	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
0.7	0.3	0.4	1.1	1.8	2.4	2.8	3.8	6.0	10.9	13.7	16.4	38.8	51.4	79.9
	0.2	0.4	1.3	2.0	2.6	3.2	4.3	6.7	12.2	15.3	18.3	43.4	57.5	89.3
1	0.7	0.3	1.0	1.6	2.0	2.5	3.3	5.2	9.5	11.8	14.2	33.6	44.5	69.2
	0.5	0.4	1.3	2.0	2.6	3.2	4.3	6.7	12.2	15.3	18.3	43.4	57.5	89.3
	0.25	0.5	1.6	2.5	3.2	3.9	5.2	8.2	15.0	18.7	22.5	53.2	70.4	109.3
1.5	1	0.4	1.3	2.0	2.6	3.2	4.3	6.7	12.2	15.3	18.3	43.4	57.5	89.3
	0.7	0.5	1.6	2.6	3.3	4.0	5.4	8.5	15.5	19.3	23.2	54.9	72.7	112.9
	0.3	0.7	2.0	3.1	4.1	4.9	6.6	10.4	18.9	23.7	28.4	67.3	89.0	138.3
2	1.5	0.4	1.3	2.0	2.6	3.2	4.3	6.7	12.2	15.3	18.3	43.4	57.5	89.3
	1	0.6	1.8	2.9	3.7	4.5	6.1	9.5	17.3	21.6	25.9	61.4	81.3	126.3
	0.4	0.8	2.3	3.6	4.7	5.7	7.7	12.0	21.9	27.3	32.8	77.7	102.8	159.7
3	2	0.6	1.8	2.9	3.7	4.5	6.1	9.5	17.3	21.6	25.9	61.4	81.3	126.3
	1.5	0.7	2.2	3.5	4.6	5.5	7.4	11.7	21.2	26.5	31.8	75.2	99.6	154.6
	0.6	0.9	2.8	4.4	5.8	7.0	9.4	14.7	26.8	33.5	40.2	95.1	125.9	195.6
3.5	3	0.4	1.3	2.0	2.6	3.2	4.3	6.7	12.2	15.3	18.3	43.4	57.5	89.3
	2	0.7	2.2	3.5	4.6	5.5	7.4	11.7	21.2	26.5	31.8	75.2	99.6	154.6
	1.5	0.9	2.6	4.0	5.3	6.4	8.6	13.5	24.5	30.6	36.7	86.8	115.0	178.6
	0.7	1.0	3.0	4.8	6.2	7.5	10.1	15.9	28.9	36.2	43.4	102.7	136.0	211.3
4	3.5	0.4	1.3	2.0	2.6	3.2	4.3	6.7	12.2	15.3	18.3	43.4	57.5	89.3
	3	0.7	2.2	2.9	3.7	4.5	6.1	9.5	17.3	21.6	25.9	61.4	81.3	126.3
	2	0.9	2.6	4.0	5.3	6.4	8.6	13.5	24.5	30.6	36.7	86.8	115.0	178.6
	0.8	1.1	3.0	5.1	6.7	8.0	10.8	17.0	30.9	38.7	46.4	109.8	145.4	225.9
	4	0.6	1.3	2.9	3.7	4.5	6.1	9.5	17.3	21.6	25.9	61.4	81.3	126.3
5	3	0.9	1.8	4.0	5.3	6.4	8.6	13.5	24.5	30.6	36.7	86.8	115.0	178.6
	2	1.0	2.6	4.9	6.4	7.8	10.5	16.5	30.0	37.4	44.9	106.3	140.8	218.7
	1	1.2	3.6	5.7	7.4	9.0	12.1	19.0	34.6	43.2	51.9	122.8	162.6	252.5
	5	0.6	1.8	2.9	3.7	4.5	6.1	9.5	17.3	21.6	25.9	61.4	81.3	126.3
6	3	1.0	3.1	4.9	6.4	7.8	10.5	16.5	30.0	37.4	44.9	106.3	140.8	218.7
	1.2	1.3	4.0	6.3	8.1	9.9	13.3	20.8	37.9	47.4	56.8	134.5	178.1	276.6
	6	0.9	2.6	4.0	5.3	6.4	8.6	13.5	24.5	30.6	36.7	86.8	115.0	178.6
8	5	1.0	3.1	4.9	6.4	7.8	10.5	16.5	30.0	37.4	44.9	106.3	140.8	218.7
	1.6	1.5	4.6	7.2	9.4	11.4	15.3	24.1	43.8	54.7	65.6	155.3	205.6	319.4
	8	0.9	2.6	4.0	5.3	6.4	8.6	13.5	24.5	30.6	36.7	86.8	115.0	178.6
10	5	1.4	4.1	6.4	8.3	10.1	13.5	21.3	38.7	48.3	58.0	137.3	181.8	282.3
	2	1.7	5.1	8.1	10.5	12.7	17.1	26.9	48.9	61.1	73.4	173.7	229.9	357.1
	10	0.9	2.6	4.0	5.3	6.4	8.6	13.5	24.5	30.6	36.7	86.8	115.0	178.6
12	8	1.2	3.6	5.7	7.4	9.0	12.1	19.0	34.6	43.2	51.9	122.8	162.6	252.5
	5	1.6	4.8	7.6	9.8	11.9	16.0	25.2	45.8	57.2	68.6	162.4	215.1	334.0
	2.3	1.9	5.7	8.9	11.6	14.0	18.9	29.6	53.9	67.3	80.8	191.2	253.2	393.2
	10	1.2	3.6	5.7	7.4	9.0	12.1	19.0	34.6	43.2	51.9	-	-	-
14	5	1.8	5.4	8.6	11.2	13.5	18.2	28.5	51.9	64.9	77.8	-	-	-
	2.7	2.0	6.1	9.6	12.5	15.1	20.3	32.0	58.1	72.7	87.2	-	-	-
	12	1.0	3.1	4.9	6.4	7.8	10.5	16.5	30.0	37.4	44.9	-	-	-
15	5	1.9	5.7	9.0	11.8	14.2	19.1	30.1	54.7	68.4	82.0	-	-	-
	2.9	2.1	6.3	9.9	12.9	15.6	21.1	33.1	60.2	75.2	90.2	-	-	-
	14	1.0	3.1	4.9	6.4	7.8	10.5	16.5	30.0	37.4	44.9	-	-	-
17	10	1.6	4.8	7.6	9.8	11.9	16.0	25.2	45.8	57.2	68.6	-	-	-
	5	2.1	6.3	9.9	12.9	15.6	21.0	33.0	59.9	74.9	89.9	-	-	-
	3.2	2.2	6.7	10.6	13.8	16.7	22.5	35.3	64.2	80.3	96.4	-	-	-
	17	1.0	3.1	4.9	6.4	7.8	10.5	16.5	30.0	37.4	44.9	-	-	-
20	14	1.5	4.4	7.0	9.1	11.0	14.8	23.3	42.4	53.0	63.5	-	-	-
	3.9	2.4	7.3	11.5	14.9	18.0	24.3	38.2	69.4	86.7	104.1	-	-	-
	24	1.0	3.1	4.9	6.4	7.8	10.5	16.5	30.0	37.4	44.9	-	-	-
27	20	1.6	4.8	7.6	9.8	11.9	16.0	25.2	45.8	57.2	68.6	-	-	-
	5.2	2.8	8.5	13.3	17.4	21.0	28.3	44.4	80.8	100.9	121.1	-	-	-


- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv.

TYPE J CONTROL VALVE



- Process control systems for food, pulp and paper, chemical, petrochemical & other industries
- HVAC systems
- Feed water and fuel system controls in boiler rooms
- Packaged systems (OEM) such as heat exchangers, water purification systems & vaporizer, metal cleaning and plating

PRESSURE/TEMPERATURE CHART

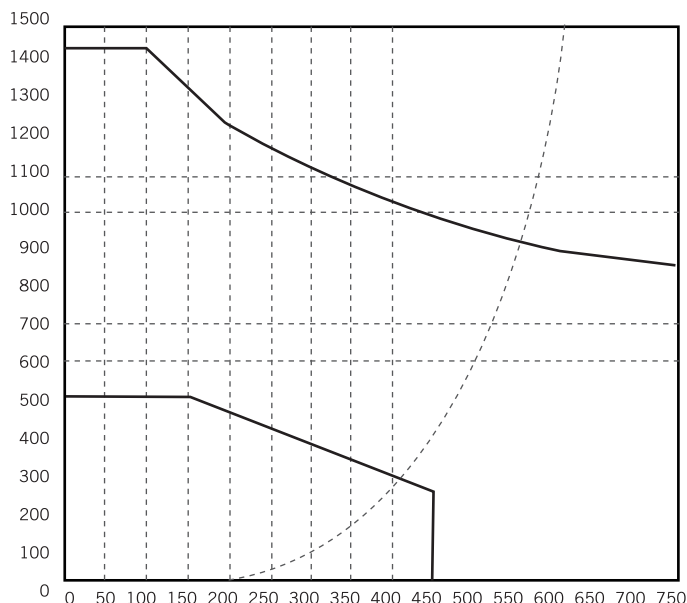

TEMPERATURE (°F)

- SATURATED STEAM
- J1 ANSI/ASME B16.1 CLASS 250 CAST IRON
- J3 ANSI/ASME B16.34 CLASS 600 STAINLESS STEEL

SIZES 1/2" - 2" ANSI CLASS 150, 300, 600

- **High Capacity Streamlined Body** reduces velocity and pressure loss.
- **Compact Design** for ease of installation.
- **Multiple Port Sizes** allows flexibility in sizing.
- **Stainless Steel Trim** for long life and corrosion resistance.
- **Super Polished, Extra Thick Stem** provides low friction and precise control.
- **Live Loaded V ring Packing** is self adjusting.
- **Slip-on Flanges** for flexibility in piping.
- **NEMUR 4 Mounting Pad** for accessories.

MODELS

- J1 — Cast Iron
- J3 — Stainless Steel*

OPTIONS

- 36 or 60 sq. in. actuators
- Soft Seats- 450° F
- Moore, PMV, Eckardt Accessories
- Threaded or Flanged Connections
- Graphite or High Temperature Packing
- High Temperature 600°F

APPLICABLE CODES

- ANSI/ISA 70-2 Class IV & VI seat leakage
- NEMUR 4 mounting of accessories

PLUG CHARACTERISTICS

- 1/8" to 1/4" Port Sizes - Equal Percent, 50:1 flow rangeability
- 5/8" to 2-1/4" Port Sizes - Modified Equal Percent, 100:1 flow rangeability

Canadian Registration # OC 0591.9C

"Cv Valves"				
1/2	3/4	1	1 1/2	2
5.1	10.3	18.3	37	67


* Body is ANSI Class 600. Pressure rating may be limited by choice of flanges.

TYPE J

CONTROL VALVE

The valve shall be single seated, top guided compact pneumatic globe control valve with a streamlined body. The actuator shall have all SS hardware with a maximum deadband of .3 PSIG. the valve trim shall be all 316SS with replaceable threaded seats for easy maintenance. Standard packing shall be spring loaded Teflon V-Rings. Optional graphite or high temperature packings available. The valve seat leakage shall conform to ANSI/ISA 70-2 Class IV for metal seats and Class VI for Teflon soft seats. The valve shall conform to NEMUR 4 for mounting of accessories

Bod	316 SS ASTM A351 CF8M Cast Iron ASTM A126 CL B
Seat Ring	SS ASTM A276 Cond A
Packing	PTFE V ring PTFE/Graphite Graphite
Plug & Stem Ass'y	316 SS ASTM A276 Cond A
Yoke	DI ASTM A536/Epoxy
Diaphragm	Nitrile/Polyester
Piston	316 SS ASTM A743 Grd CF8
Spring	Music Wire ASTM A228
Actuator Housing	Steel SAE 1006-1008/Epoxy

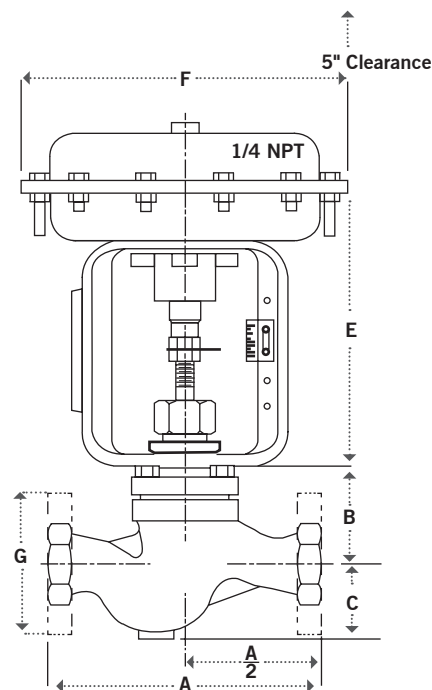

DIMENSIONS INCHES AND WEIGHTS POUNDS

Size	A		B C		E		F		G (Flangediameter)		Weights*			
	Scrd.	Flg.			36in.	62in.3	36in.2	60in.2	150	300/600	Screwed		Flanged	
											36in.2	60in.2	36in.2	60in.2
1/2	7 5/8	8	2 11/16	1 7/8	9 7/8	11 7/8	9 1/4	11 1/4	3 1/2	33/4	20 1/2	36 1/2	23 1/2	39 1/2
3/4	7 5/8	8 1/8	2 11/16	1 7/8	9 7/8	11 7/8	9 1/4	11 1/4	3 7/8	45/8	20 1/2	36 1/2	25 3/4	41 3/4
1	7 3/4	8 1/4	2 3/4	2 1/8	9 7/8	11 7/8	9 1/4	11 1/4	4 1/4	47/8	22 1/2	38 3/4	29	45 1/4
1 1/2	9 1/4	9 7/8	33/8	2 11/16	9 7/8	11 7/8	9 1/4	11 1/4	5	61/8	29 1/4	45 1/2	40 1/4	57 1/2
2	10 1/2	11 1/4	3 9/32	3 5/16	9 7/8	11 7/8	9 1/4	11 1/4	6	6 1/2	38 1/4	54 1/4	50 1/4	68 1/4

*Weights are approximate

PRESSURE RECOVERY FACTORS

FOR GAS: XT=0.7, FOR FL: SEE CHART

1/2			3/4			1			1 1/2			2		
1/4	5/8	1/4	5/8	7/8	1/4	5/8	7/8	1 1/4	7/8	1 1/4	1 3/4	1 1/4	1 3/4	2 1/4
.851	.79	.864	.82	.775	.869	.839	.805	.768	.843	.82	.782	.841	.811	.772

ORDERING CODE

CODE SELECTION CHART

Model		Orifice	Size	Conne	Trim	Packing-	Actuator		Spring	Positioner		Posit.Set	Accessories	Inlet Pressure				
																		
J	T	J	C	9	1	1	-	3	6	R	M	M	P	0	1	1	2	5
1	2	3	4	5	6	7		8	9	10	11	12	13	14	15		16	

Model
Position 1 & 2
J1 = Cast Iron
J3 = Stainless
Orifice -
Position 3
F = 1/8
G = 3/6
H = 1/4
J = 5/8
K = 7/8
L = 1 1/4
M = 1 3/4
N = 2 1/4
Size -
Position 4
C = 1/2
D = 3/4
E = 1
G = 1 1/2
H = 2
Connections -
Position 5
1 = 150
3 = 300
6 = 600#
9 = Threaded

Trim -
Position 6
1 = Metal
2 = Soft
Packing -
Position 7
1 = V-ring
2 = Graphite
3 = Hi-Temp
Actuator -
Position 8 & 9
01 = None
36 = 36 sq. in.
60 = 60 sq. in.
Spring -
Position 10 & 11
DC = 3-13 Dir 36
DD = 3-10 Dir 36
DE = 3-5 Dir 36
DF = 3-10 Dir 60*
DG = 3-11 Dir 60
DH = 3-8 Dir 60
RC = 5-15 Rev 36
RD = 8-15 Rev 36
RE = 10-15 Rev 36
RG = 8-15 Rev 60
RH = 10-15 Rev 60
RK = 20-60 Rev 60
RL = 20-60 Rev 60*
RQ = 12-15 Rev 60

Positioner -
Position 12 & 13
AA = None
EI = Eckardt I/P
EP = Eckardt P
MI = Moore I/P
MP = Moore P
4P = PMV P4 P
51 = PMV P5 I/P
5P = PMV P5
MS = Smart HART
MT = Smart Profibus
Positioner Set
Position 14
1 = None
2 = 3-15/4-20 mA
3 = 3-9/4-12 mA
4 = 9-15/12-20 mA

Accessories -
Position 15
1 = None
2 = Limit Switch, Mechanical
3 = Limit Switch,
Proximity Switch
4 = Feedback Potentiometer 1K
5 = Feedback 4-20mA Posit. Trans
Inlet Pressure -
Position 16 = Actual Setting

SHUTOFF & CV TABLES

ACTUATOR SHUTOFF TABLE

SIZE	ACT SIZE	BENCH RANGE	K3 REVERSE SHUTOFF*		BENCH RANGE	K3 DIRECT SHUTOFF*	
			3-15 PSI	0-20 PSI		3-15 PSI	0-20 PSI
1/8	36	5-15	0 - 750	0 - 750	3-13	0 - 750	0 - 750
3/16, 1/4	36	5 - 15	0 - 250	0 - 750	3 - 13	0 - 250	0 - 750
5/8	36	5-15		0-50	3-10	0 - 300	0 - 750
		8 - 15	0 - 350	50 - 500	3 - 5	300 - 750	300 - 750
		10 - 15	350 - 550	500 - 750	-	-	-
7/8	36	8-15	0 - 200	0 - 300	3-10	0 - 150	0 - 350
		10 - 15	200 - 300	300 - 450	3 - 5	150 - 400	350 - 650
	60	8-15	0 - 500	0 - 700	3-11	0 - 300	0 - 600
		10 - 15	500 - 650	700 - 750	3 - 8	300 - 500	600 - 750
		12 - 15	650 - 750	-	-	-	-
1-1/4	36	-	-	-	3-10	0 - 150	0 - 300
		10 - 15	0 - 150	0 - 225	3 - 5	150 - 225	300 - 375
	60	8-15	0 - 200	0 - 300	3-11	0 - 150	0 - 350
		10 - 15	200 - 250	300 - 350	3 - 8	150 - 250	350 - 450
		12 - 15	250 - 300	350 - 400	-	-	-
		20 - 60**		0 - 750**			-
	36	10 - 15	0-75	0 - 125	3 - 5	0 - 100	0 - 200
1-3/4	60	8-15	0-75	0 - 125	3-11	0 - 100	0 - 200
		10 - 15	75 - 125	125 - 175	3 - 8	100 - 125	200 - 250
		12 - 15	125 - 175	175 - 225	-	-	-
		20 - 60**		0 - 375**			-
2-1/4	60	12 - 15	0 - 100	0 - 125	3-10	0-50	0 - 100
		20 - 60**	-	0 - 225**	-	-	-

Based on 20 psi air supply w/ EPC or Positioner ** Based on 60 psi air supply w/ EPC or Positioner NOTES:

- 1) For pressures over 750 psi please consult factory
- 2) For direct configured actuators 60 psi air signal will achieve 750 psi shutoff except for 2.25 port which will achieve 650 psi shutoff
- 3) Do not exceed 60 psi air signal to actuator

ACTUATOR SELECTION

Select Actuator size and bench range that will accommodate require shut off with port size selected. Select reverse for air to open fail close applications, direct for air to close fail open applications

Cv TABLE

SIZE	TRAVEL	PORT SIZE	PLUG CON-TOUR	PERCENT OF TRAVEL										
				5	10	20	30	40	50	60	70	80	90	100
1/2	3/4	1/8	EP	0.002	0.003	0.006	0.011	0.021	0.032	0.042	0.052	0.062	0.072	0.08
		3/16	EP	0.004	0.008	0.014	0.021	0.03	0.045	0.063	0.095	0.145	0.25	0.5
		1/4	EP	0.03	0.04	0.07	0.12	0.18	0.25	0.36	0.49	0.7	1.1	1.5
3/4	3/4	5/8	MEP	0.05	0.1	0.18	0.31	0.49	0.73	1.1	1.6	2.3	3.4	5.1
		1/8	EP	0.002	0.003	0.006	0.011	0.021	0.032	0.042	0.052	0.062	0.072	0.08
		3/16	EP	0.004	0.008	0.014	0.021	0.03	0.045	0.063	0.095	0.145	0.25	0.5
1	3/4	1/4	EP	0.03	0.04	0.07	0.12	0.18	0.25	0.36	0.49	0.7	1.1	1.5
		5/8	MEP	0.05	0.07	0.18	0.31	0.47	0.73	1.1	1.6	2.4	3.8	6
		7/8	MEP	0.07	0.19	0.58	1	1.3	1.9	2.5	3.8	5.7	8.7	10.3
1-1/2	3/4	5/8	MEP	0.04	0.07	0.16	0.31	0.54	0.79	1.1	1.8	2.2	4	6.2
		7/8	MEP	0.07	0.15	0.42	0.75	1.2	1.9	2.9	4.2	6.7	9.8	12.1
		1-1/4	MEP	0.09	0.27	0.63	1	1.4	3.2	5.3	7.5	11.5	15.6	18.2
2	3/4	7/8	MEP	0.11	0.21	0.54	0.89	1.4	1.9	2.7	3.9	6.4	10.1	13.2
		1-1/4	MEP	0.14	0.37	0.99	1.5	2.4	3.6	5.3	7.5	12.3	16.8	22
		1-3/4	MEP	0.41	0.85	2.4	4.3	6.4	9.9	15.7	22.7	29	34.2	37
2-1/4	1 1/16	1-1/4	MEP	0.14	0.37	0.99	1.5	2.4	3.6	5.3	7.5	12.3	17.3	23
		1-3/4	MEP	0.41	0.85	2.4	4.3	6.5	10	16	23	31	37	43
		2-1/4	MEP	0.75	1.5	3.5	6.5	10.5	15.5	26	39	50	60	67

SATURATED STEAM

CAPACITY TABLE

(Lbs./Hr.)

PRESSURE (PSI)		VALVE SIZE AND PORT																	
		1/2				3/4					1			1-1/2			2		
P1	P2	1/8	3/16	1/4	5/8	1/8	3/16	1/4	5/8	7/8	5/8	7/8	1-1/4	7/8	1-1/4	1-3/4	1-1/4	1-3/4	2-1/4
10	5	2	16	47	159	2	16	47	187	322	194	378	569	412	687	1156	719	1344	2094
	3	3	18	53	181	3	18	53	213	366	220	430	646	469	781	1314	817	1527	2380
15	10	3	17	52	177	3	17	52	208	357	215	419	630	457	762	1281	796	1489	2320
	7	3	21	62	212	3	21	62	250	429	258	503	757	549	915	1540	957	1789	2788
	5	4	22	67	229	4	22	67	269	463	278	543	817	593	988	1662	1033	1931	3009
20	15	3	19	56	192	3	19	56	226	387	233	455	685	497	828	1392	865	1617	2520
	10	4	25	74	253	4	25	74	297	510	307	599	902	654	1090	1833	1139	2130	3319
	7	4	27	81	275	4	27	81	324	555	334	652	981	712	1186	1995	1240	2319	3613
30	22	4	26	79	268	4	26	79	315	541	326	636	957	694	1156	1945	1209	2260	3522
	17	5	32	95	323	5	32	95	380	652	393	766	1153	836	1393	2343	1457	2723	4243
	10	6	36	108	369	6	36	108	434	744	448	874	1315	954	1590	2674	1662	3108	4842
40	25	6	38	113	384	6	38	113	452	775	467	911	1370	994	1656	2786	1732	3237	5044
	20	7	41	124	423	7	41	124	497	854	514	1003	1508	1094	1823	3067	1906	3564	5553
	3-0	8	47	141	480	8	47	141	564	969	583	1138	1711	1241	2069	3479	2163	4043	6300
50	35	7	42	125	424	7	42	125	498	855	515	1005	1511	1096	1827	3073	1910	3571	5564
	30	7	46	138	470	7	46	138	553	950	572	1116	1679	1217	2029	3413	2121	3966	6179
	25	8	49	148	505	8	49	148	594	1019	614	1198	1801	1307	2178	3662	2277	4256	6632
60	6-0	9	55	166	564	9	55	166	663	1139	686	1338	2013	1460	2433	4091	2543	4755	7409
	45	7	45	135	460	7	45	135	541	928	559	1090	1640	1189	1982	3334	2072	3874	6037
	40	8	50	151	513	8	50	151	604	1036	624	1217	1831	1328	2213	3722	2313	4325	6739
75	35	9	54	163	554	9	54	163	652	1119	674	1315	1977	1434	2390	4020	2499	4672	7279
	9-0	10	64	191	648	10	64	191	763	1309	788	1538	2314	1678	2797	4704	2924	5466	8517
	55	9	56	168	571	9	56	168	671	1153	694	1354	2036	1477	2462	4140	2574	4811	7497
100	50	10	61	182	620	10	61	182	730	1253	754	1472	2214	1606	2677	4501	2798	5231	8151
	45	10	65	194	660	10	65	194	777	1334	803	1567	2356	1709	2848	4791	2978	5568	8675
	14-0	12	76	227	772	12	76	227	909	1560	939	1833	2757	1999	3332	5604	3484	6513	10148
125	75	11	70	210	715	11	70	210	841	1444	869	1697	2552	1851	3085	5188	3225	6029	9394
	60	13	83	249	847	13	83	249	996	1710	1029	2009	3021	2191	3652	6142	3818	7138	11122
	22-0	15	96	288	978	15	96	288	1151	1975	1189	2321	3491	2532	4219	7096	4411	8247	12850
150	100	13	78	234	797	13	78	234	938	1609	969	1891	2844	2063	3438	5782	3594	6719	10469
	75	16	101	303	1030	16	101	303	1212	2081	1252	2444	3676	2666	4444	7474	4646	8686	13534
	30-0	19	116	348	1182	19	116	348	1391	2388	1437	2805	4220	3060	5101	8578	5332	9969	15534
175	125	14	86	257	875	14	86	257	1029	1766	1063	2075	3121	2264	3773	6346	3945	7375	11491
	100	18	112	336	1142	18	112	336	1343	2306	1388	2709	4074	2955	4925	8283	5149	9626	14998
	38-0	22	136	407	1385	22	136	407	1629	2796	1683	3285	4941	3584	5973	10045	6244	11674	18190
200	150	15	92	275	936	15	92	275	1101	1890	1138	2221	3340	2422	4037	6790	4221	7891	12296
	125	20	122	367	1249	20	122	367	1469	2522	1518	2963	4457	3232	5387	9060	5632	10529	16406
	100	22	139	418	1421	22	139	418	1672	2870	1728	3372	5072	3678	6131	10311	6409	11983	18671
225	46-0	25	155	466	1585	25	155	466	1865	3202	1927	3761	5657	4103	6838	11501	7149	13366	20826
	150	21	131	392	1333	21	131	392	1569	2693	1621	3164	4759	3451	5752	9674	6014	11243	17518
	125	24	152	455	1549	24	152	455	1822	3127	1883	3674	5526	4008	6680	11235	6984	13056	20344
250	54-0	28	175	525	1784	28	175	525	2098	3602	2168	4232	6365	4616	7694	12939	8043	15038	23431
	175	22	139	417	1418	22	139	417	1669	2865	1724	3365	5062	3671	6119	10291	6397	11960	18635
	150	26	162	485	1649	26	162	485	1940	3331	2005	3913	5885	4268	7114	11964	7437	13904	21665
250	63-0	31	194	583	1981	31	194	583	2330	4001	2408	4700	7069	5127	8545	14371	8933	16701	26023
	200	23	147	441	1498	23	147	441	1762	3025	1821	3554	5345	3877	6461	10866	6755	12628	19676
	175	27	172	515	1751	27	172	515	2060	3536	2129	4154	6249	4532	7554	12704	7897	14764	23004
	150	30	189	566	1926	30	189	566	2266	3889	2341	4569	6872	4984	8307	13971	8685	16237	25300
	71-0	34	214	641	2179	34	214	641	2564	4401	2649	5170	7776	5640	9400	15808	9827	18372	28626

- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv.

SATURATED STEAM

CAPACITY TABLE

(Kg./Hr.)

PRESSURE		VALVE SIZE AND PORT																	
(BAR)		1/2			3/4			1			1-1/2			2					
P1	P2	1/8	3/16	1/4	5/8	1/8	3/16	1/4	5/8	7/8	5/8	7/8	1-1/4	7/8	1-1/4	1-3/4	1-1/4	1-3/4	2
0.7	0.3	1	8	23	77	1	8	23	90	155	93	182	274	199	331	557	346	647	1008
	0.2	1	8	25	83	1	8	25	98	169	101	198	298	216	360	606	376	704	1097
1	0.7	1	7	22	75	1	7	22	88	151	91	178	267	194	323	543	337	631	983
	0.5	1	9	27	92	1	9	27	108	186	112	218	328	238	397	667	415	775	1208
	0.3	2	10	30	103	2	10	30	121	208	125	245	368	267	445	748	465	869	1354
	1	2	10	31	104	2	10	31	123	211	127	247	372	270	450	756	470	879	1370
1.5	0.7	2	12	37	124	2	12	37	146	251	151	295	444	322	536	902	561	1048	1633
	0.5	2	13	39	133	2	13	39	157	269	162	316	475	345	574	966	600	1122	1749
2	1.5	2	11	34	115	2	11	34	136	233	140	273	411	298	497	836	520	972	1514
	1.2	2	14	41	139	2	14	41	163	280	169	329	495	359	599	1007	626	1170	1823
	1	2	15	44	151	2	15	44	178	305	184	358	539	391	651	1095	681	1273	1983
3	2	3	18	53	179	3	18	53	211	362	218	425	639	464	773	1299	808	1510	2353
	1.5	3	20	60	205	3	20	60	241	414	249	487	732	531	885	1489	925	1730	2696
	3-0	4	23	68	231	4	23	68	272	467	281	549	826	599	998	1679	1044	1951	3040
3.5	3.0	2	14	42	143	2	14	42	169	289	174	340	511	371	618	1040	646	1208	1883
	2.0	3	22	65	221	3	22	65	260	446	268	524	788	571	952	1601	996	1861	2900
	1.0	4	24	73	249	4	24	73	293	503	303	591	889	645	1075	1808	1124	2101	3273
	4-0	4	25	76	259	4	25	76	304	523	315	614	923	670	1116	1877	1167	2181	3399
4	3.0	3	20	59	202	3	20	59	238	409	246	480	722	524	873	1468	912	1706	2657
	2.0	4	25	75	256	4	25	75	301	517	311	607	913	662	1104	1856	1154	2158	3362
	1.0	4	27	81	276	4	27	81	325	558	336	656	986	715	1192	2005	1246	2330	3631
	6-0	4	28	84	286	4	28	84	337	578	348	679	1021	741	1234	2076	1290	2413	3759
5	4.0	4	22	66	224	4	22	66	264	453	272	532	800	580	967	1625	1010	1889	2943
	3.0	5	28	85	290	5	28	85	341	585	352	687	1034	750	1250	2101	1306	2442	3805
	2.0	5	31	94	321	5	31	94	378	649	391	762	1146	831	1386	2331	1449	2708	4220
	9-0	5	33	100	341	5	33	100	401	688	414	808	1215	881	1469	2471	1536	2871	4474
7	5.0	5	34	102	345	5	34	102	406	698	420	820	1233	894	1490	2506	1558	2913	4538
	3.0	7	42	125	424	7	42	125	499	856	515	1006	1513	1097	1829	3075	1912	3574	5569
	1.6-0	7	44	132	449	7	44	132	529	908	546	1066	1604	1163	1939	3260	2027	3789	5904
	7.0	6	38	115	392	6	38	115	462	793	477	931	1400	1016	1693	2847	1770	3309	5155
9	5.0	8	49	147	500	8	49	147	589	1010	608	1187	1786	1295	2158	3630	2256	4219	6573
	2.1-0	9	55	164	557	9	55	164	656	1126	678	1322	1989	1442	2404	4043	2513	4699	7321
	8.0	6	41	122	414	6	41	122	487	836	503	982	1478	1072	1786	3004	1867	3491	5439
	5.0	9	55	165	561	9	55	165	660	1132	682	1330	2001	1451	2419	4068	2529	4727	7366
10	2.5-0	10	60	179	609	10	60	179	716	1230	740	1445	2173	1576	2627	4417	2746	5134	7999
	10.0	7	44	133	451	7	44	133	530	910	548	1069	1608	1167	1944	3270	2033	3800	5921
12	7.0	10	62	186	634	10	62	186	746	1280	771	1504	2262	1641	2735	4599	2859	5345	8328
	5.0	11	67	201	683	11	67	201	803	1379	830	1620	2437	1768	2946	4955	3080	5758	8972
	3.2-0	11	70	210	715	11	70	210	841	1444	869	1697	2552	1851	3085	5188	3225	6030	9395
	10.0	10	63	189	644	10	63	189	757	1300	783	1527	2297	1666	2777	4670	2903	5427	8456
14	7.0	12	75	225	766	12	75	225	901	1546	931	1817	2733	1982	3303	5555	3453	6456	10059
	3.8-0	13	80	241	820	13	80	241	965	1656	997	1946	2927	2123	3538	5950	3699	6915	10775
	12.0	9	59	176	597	9	59	176	703	1207	726	1417	2132	1546	2577	4334	2694	5037	7849
	10.0	11	71	213	724	11	71	213	852	1462	880	1718	2584	1874	3123	5253	3265	6104	9511
15	4.2-0	14	85	256	870	14	85	256	1024	1758	1058	2065	3106	2252	3754	6313	3925	7337	11432
	15.0	8	53	158	536	8	53	158	630	1082	651	1271	1911	1386	2310	3885	2415	4515	7035
	12.0	12	76	229	778	12	76	229	915	1572	946	1846	2777	2014	3357	5645	3509	6561	10223
	10.0	14	85	255	868	14	85	255	1022	1754	1056	2060	3099	2248	3746	6300	3916	7322	11408
17	4.8-0	15	96	287	975	15	96	287	1147	1969	1185	2314	3480	2524	4206	7075	4398	8222	12811

- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv.

AIR CAPACITY TABLE

(SCFH)

PRESSURE (PSI)		VALVE SIZE AND PORT																	
		1/2			3/4			1			1-1/2			2					
P1	P2	1/8	3/16	1/4	5/8	1/8	3/16	1/4	5/8	7/8	5/8	7/8	1-1/4	7/8	1-1/4	1-3/4	1-1/4	1-3/4	2-1/4
10	5	48	300	901	3064	48	300	901	3605	6189	3725	7270	10936	7931	13219	22232	13820	25837	40258
	3	55	341	1023	3477	55	341	1023	4091	7023	4227	8250	12409	9000	15000	25227	15682	29318	45682
15	10	54	335	1005	3418	54	335	1005	4021	6904	4156	8110	12199	8847	14745	24799	15416	28821	44907
	7	64	403	1208	4106	64	403	1208	4831	8293	4992	9743	14655	10629	17714	29792	18519	34623	53948
20	5	69	434	1303	4429	69	434	1303	5211	8945	5385	10508	15806	11464	19106	32133	19975	37344	58188
	15	59	367	1100	3739	59	367	1100	4399	7552	4546	8872	13345	9678	16131	27129	16864	31528	49126
30	10	77	482	1445	4914	77	482	1445	5781	9924	5973	11658	17535	12718	21196	35648	22160	41429	64552
	7	84	524	1572	5346	84	524	1572	6290	10797	6499	12684	19078	13837	23062	38786	24110	45075	70234
40	22	83	517	1552	5276	83	517	1552	6208	10656	6414	12519	18830	13657	22761	38280	23796	44488	69318
	17	100	623	1868	6350	100	623	1868	7470	12824	7719	15065	22660	16435	27391	46067	28636	53537	83419
50	10	113	708	2124	7222	113	708	2124	8497	14586	8780	17135	25774	18693	31155	52398	32572	60895	94882
	25	119	746	2239	7612	119	746	2239	8955	15373	9253	18059	27163	19701	32835	55222	34327	64177	99996
60	20	131	820	2461	8367	131	820	2461	9844	16898	10172	19851	29859	21656	36094	60703	37734	70547	109922
	3-0	148	924	2773	9429	148	924	2773	11093	19043	11463	22371	33649	24405	40674	68407	42523	79500	123871
75	35	133	830	2489	8463	133	830	2489	9956	17091	10288	20078	30200	21903	36505	61395	38164	71351	111174
	30	147	920	2760	9384	147	920	2760	11040	18951	11408	22263	33487	24287	40478	68077	42318	79117	123275
100	25	158	986	2958	10057	158	986	2958	11832	20312	12227	23862	35891	26031	43385	72966	45357	84798	132127
	6-0	175	1094	3281	11156	175	1094	3281	13124	22530	13562	26467	39810	28873	48122	80933	50310	94057	146555
125	45	145	906	2717	9238	145	906	2717	10868	18657	11231	21918	32967	23910	39850	67021	41662	77889	121362
	40	162	1010	3031	10306	162	1010	3031	12125	20814	12529	24452	36778	26674	44457	74769	46478	86894	135393
150	35	174	1090	3270	11119	174	1090	3270	13081	22455	13517	26380	39679	28778	47963	80665	50143	93746	146070
	9-0	202	1263	3789	12882	202	1263	3789	15155	26017	15661	30563	45971	33342	55570	93459	58096	108614	169236
200	55	181	1133	3399	11558	181	1133	3399	13598	23343	14051	27422	41247	29915	49859	83853	52125	97451	151842
	50	197	1231	3692	12554	197	1231	3692	14769	25354	15262	29785	44800	32493	54154	91078	56616	105847	164925
250	45	209	1309	3926	13349	209	1309	3926	15704	26959	16228	31670	47636	34549	57582	96843	60199	112547	175364
	14-0	243	1516	4549	15466	243	1516	4549	18195	31236	18802	36694	55193	40030	66717	112206	69749	130401	203183
300	75	230	1436	4309	14650	230	1436	4309	17235	29587	17810	34758	52281	37918	63196	106285	66069	123520	192462
	60	271	1696	5087	17295	271	1696	5087	20347	34928	21025	41032	61718	44763	74604	125471	77995	145817	227204
400	22-0	310	1939	5817	19777	310	1939	5817	23267	39941	24042	46921	70576	51187	85311	143478	89189	166745	259811
	100	259	1617	4850	16490	259	1617	4850	19400	33303	20046	39123	58846	42679	71132	119631	74365	139031	216630
500	75	333	2082	6245	21232	333	2082	6245	24979	42881	25812	50375	75770	54954	91591	154039	95754	179018	278935
	30-0	378	2361	7084	24087	378	2361	7084	28338	48647	29282	57148	85958	62343	103906	174750	108629	203088	316440
600	125	285	1779	5338	18148	285	1779	5338	21350	36651	22062	43057	64763	46971	78285	131660	81843	153011	238412
	100	372	2328	6983	23742	372	2328	6983	27932	47950	28863	56330	84727	61450	102417	172247	107073	200179	311907
750	38-0	445	2784	8352	28398	445	2784	8352	33409	57352	34523	67375	101341	73500	122500	206023	128068	239432	373068
	150	309	1928	5785	19669	309	1928	5785	23140	39723	23911	46665	70191	50907	84846	142695	88702	165835	258394
1000	125	408	2551	7654	26024	408	2551	7654	30617	52559	31637	61744	92871	67357	112262	188804	117365	219421	341889
	100	466	2910	8729	29679	466	2910	8729	34917	59940	36080	70415	105914	76816	128027	215319	133847	250235	389902
1250	46-0	513	3207	9620	32708	513	3207	9620	38480	66058	39763	77602	116723	84657	141094	237295	147508	275775	429696
	150	441	2758	8274	28130	441	2758	8274	33094	56812	34197	66740	100385	72807	121345	204080	126861	237174	369551
1500	125	508	3175	9526	32390	508	3175	9526	38105	65414	39376	76846	115587	83832	139720	234984	146071	273089	425511
	54-0	581	3629	10888	37019	581	3629	10888	43551	74763	45003	87829	132106	95813	159689	268567	166947	312119	486325
2000	175	472	2950	8851	30094	472	2950	8851	35404	60778	36585	71399	107394	77890	129816	218328	135717	253732	395350
	150	548	3422	10266	34905	548	3422	10266	41065	70495	42434	82815	124564	90343	150572	253235	157416	294300	458560
2500	63-0	648	4051	12152	41317	648	4051	12152	48608	83444	50229	98027	147445	106938	178230	299751	186332	348359	542792
	200	501	3131	9394	31941	501	3131	9394	37577	64507	38830	75781	113984	82670	137783	231726	144046	269303	419612
3000	175	584	3653	10959	37262	584	3653	10959	43837	75254	45298	88405	132973	96442	160736	270329	168043	314167	489515
	150	641	4008	12024	40881	641	4008	12024	48096	82564	49699	96993	145890	105810	176350	296589	184366	344685	537067
	71-0	716	4473	13420	45628	716	4473	13420	53680	92150	55469	108254	162828	118095	196825	331024	205771	384703	599421

- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv.

AIR CAPACITY TABLE

(M³/Hr)

PRESSURE (BAR)		VALVE SIZE AND PORT																	
		1/2				3/4				1			1-1/2			2			
P1	P2	1/8	3/16	1/4	5/8	1/8	3/16	1/4	5/8	7/8	5/8	7/8	1-1/4	7/8	1-1/4	1-3/4	1-1/4	1-3/4	2-1/4
0.7	0.3	1.4	9.0	27	92	1.4	9.0	27	109	186	112	219	329	239	398	669	416	778	1212
	0.2	1.6	10	29	100	1.6	10	29	118	202	122	237	357	259	432	726	451	844	1315
1	0.7	1.4	8.9	27	90	1.4	8.9	27	106	183	110	214	323	234	390	656	408	762	1187
	0.5	1.7	11	33	111	1.7	11	33	131	224	135	263	396	287	479	805	500	936	1458
1.5	0.3	2.0	12	37	125	2.0	12	37	147	252	151	295	444	322	537	904	562	1050	1636
	1	2.0	12	37	127	2.0	12	37	150	257	155	302	454	329	549	923	573	1072	1671
	0.7	2.4	15	44	151	2.4	15	44	178	305	184	359	539	391	652	1097	682	1274	1986
2	0.5	2.5	16	48	162	2.5	16	48	190	327	197	384	577	419	698	1174	730	1364	2125
	1.5	2.2	14	42	142	2.2	14	42	167	286	172	336	505	366	611	1027	638	1194	1860
	1.2	2.7	17	50	170	2.7	17	50	200	344	207	404	607	441	734	1235	768	1435	2236
3	1	2.9	18	54	184	2.9	18	54	216	371	223	436	655	475	792	1333	828	1549	2413
	2	3.5	22	65	221	3.5	22	65	261	447	269	525	790	573	955	1607	999	1867	2909
	1.5	4.0	25	75	254	4.0	25	75	299	512	308	602	905	657	1095	1841	1144	2139	3333
3.5	3.0	4.5	28	84	284	4.5	28	84	334	574	345	674	1014	735	1225	2060	1281	2395	3731
	3.0	2.8	17	52	178	2.8	17	52	209	359	216	422	635	461	768	1291	803	1501	2338
	2.0	4.3	27	81	275	4.3	27	81	324	556	335	653	982	712	1187	1997	1241	2321	3616
	1.0	4.9	31	92	313	4.9	31	92	368	631	380	742	1116	809	1349	2268	1410	2636	4108
4	4.0	5.0	31	94	320	5.0	31	94	376	646	389	758	1141	827	1379	2319	1442	2695	4200
	3.0	4.0	25	75	254	4.0	25	75	299	513	309	602	906	657	1095	1842	1145	2141	3336
	2.0	5.1	32	95	323	5.1	32	95	380	652	393	766	1152	836	1393	2342	1456	2722	4242
	1.0	5.5	34	103	351	5.5	34	103	413	709	427	833	1253	909	1515	2547	1583	2960	4613
5	6.0	5.6	35	104	355	5.6	35	104	418	717	431	842	1267	919	1531	2575	1601	2992	4662
	4.0	4.4	28	83	283	4.4	28	83	333	571	344	671	1009	732	1220	2051	1275	2384	3714
	3.0	5.8	36	108	367	5.8	36	108	432	741	446	870	1309	949	1582	2661	1654	3093	4819
	2.0	6.4	40	120	409	6.4	40	120	481	826	497	970	1459	1058	1763	2965	1843	3446	5370
7	9.0	6.7	42	125	426	6.7	42	125	501	860	518	1010	1520	1102	1837	3089	1920	3590	5594
	5.0	6.9	43	130	442	6.9	43	130	521	894	538	1050	1579	1145	1909	3210	1995	3731	5813
	3.0	8.5	53	160	545	8.5	53	160	641	1100	662	1292	1944	1410	2350	3952	2457	4593	7157
	1.6-0	8.9	56	167	567	8.9	56	167	667	1145	689	1345	2024	1468	2446	4114	2557	4781	7450
9	7.0	8.0	50	149	507	8.0	50	149	597	1025	617	1204	1811	1313	2189	3681	2288	4278	6666
	5.0	10	63	190	645	10	63	190	759	1303	784	1531	2302	1670	2783	4680	2909	5439	8475
	2.1-0	11	70	209	709	11	70	209	834	1433	862	1683	2531	1836	3060	5146	3199	5981	9318
10	8.0	8.4	53	158	537	8.4	53	158	632	1085	653	1274	1916	1390	2316	3896	2422	4528	7055
	5.0	12	72	216	733	12	72	216	863	1481	891	1740	2617	1898	3163	5319	3307	6182	9632
	2.5-0	12	76	229	780	12	76	229	917	1575	948	1850	2783	2018	3364	5657	3517	6575	10244
12	10.0	9.3	58	174	592	9.3	58	174	696	1195	720	1404	2112	1532	2553	4294	2669	4990	7776
	7.0	13	81	244	829	13	81	244	976	1675	1008	1967	2959	2146	3577	6016	3740	6992	10894
	5.0	14	88	264	897	14	88	264	1055	1812	1091	2129	3202	2322	3870	6509	4046	7564	11786
14	3.2-0	14	90	271	921	14	90	271	1084	1860	1120	2185	3287	2384	3973	6682	4154	7766	12100
	10.0	13	83	250	849	13	83	250	999	1715	1032	2014	3030	2197	3662	6159	3829	7158	11153
	7.0	16	99	296	1006	16	99	296	1183	2031	1223	2386	3589	2603	4338	7296	4536	8480	13212
15	3.8-0	17	104	313	1063	17	104	313	1250	2147	1292	2522	3793	2751	4585	7711	4793	8961	13963
	12.0	12	78	233	791	12	78	233	930	1597	961	1876	2822	2047	3411	5737	3566	6667	10388
	10.0	15	94	281	957	15	94	281	1126	1932	1163	2270	3414	2476	4127	6942	4315	8067	12570
17	4.2-0	18	111	333	1133	18	111	333	1333	2289	1378	2689	4044	2933	4888	8222	5111	9555	14888
	15.0	11	70	209	711	11	70	209	837	1436	864	1687	2537	1840	3067	5158	3207	5995	9341
	12.0	16	101	304	1034	16	101	304	1216	2088	1257	2452	3689	2675	4459	7499	4662	8715	13579
	10.0	18	113	339	1152	18	113	339	1355	2326	1400	2732	4110	2981	4968	8355	5193	9709	15129
	4.8-0	20	125	375	1275	20	125	375	1500	2575	1550	3025	4550	3300	5500	9250	5750	10750	16751

- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv.

WATER CAPACITY TABLE

(G.P.M.)

PRESSURE (PSI)		VALVE SIZE AND PORT																	
		1/2				3/4				1				1-1/2			2		
P1	P2	1/8	3/16	1/4	5/8	1/8	3/16	1/4	5/8	7/8	5/8	7/8	1-1/4	7/8	1-1/4	1-3/4	1-1/4	1-3/4	2-1/4
10	5	0.18	1.1	3.4	11.4	0.18	1.1	3.4	13.4	23.0	13.9	27.1	40.7	29.5	49.2	82.7	51.4	96.2	150
	4	0.20	1.2	3.7	12.5	0.20	1.2	3.7	14.7	25.2	15.2	29.6	44.6	32.3	53.9	90.6	56.3	105	164
15	10	0.18	1.1	3.4	11.4	0.18	1.1	3.4	13.4	23.0	13.9	27.1	40.7	29.5	49.2	82.7	51.4	96.2	150
	7	0.23	1.4	4.2	14.4	0.23	1.4	4.2	17.0	29.1	17.5	34.2	51.5	37.3	62.2	105	65	122	190
	6	0.24	1.5	4.5	15.3	0.24	1.5	4.5	18.0	30.9	18.6	36.3	54.6	39.6	66.0	111	69	129	201
20	15	0.18	1.1	3.4	11.4	0.18	1.1	3.4	13.4	23.0	13.9	27.1	40.7	29.5	49.2	82.7	51.4	96.2	150
	10	0.25	1.6	4.7	16.1	0.25	1.6	4.7	19.0	32.6	19.6	38.3	57.6	41.7	69.6	117	72.7	136	212
	8	0.28	1.7	5.2	17.7	0.28	1.7	5.2	20.8	35.7	21.5	41.9	63.0	45.7	76.2	128	79.7	149	232
30	25	0.18	1.1	3.4	11.4	0.18	1.1	3.4	13.4	23.0	13.9	27.1	40.7	29.5	49.2	83	51.4	96	150
	20	0.25	1.6	4.7	16.1	0.25	1.6	4.7	19.0	32.6	19.6	38.3	57.6	41.7	69.6	117	72.7	136	212
	12	0.34	2.1	6.4	21.6	0.34	2.1	6.4	25.5	43.7	26.3	51.3	77.2	56.0	93.3	157	98	182	284
40	25	0.31	1.9	5.8	19.8	0.31	1.9	5.8	23.2	39.9	24.0	46.9	70.5	51.1	85.2	143	89.1	167	259
	20	0.36	2.2	6.7	22.8	0.36	2.2	6.7	26.8	46.1	27.7	54.1	81.4	59.0	98.4	165	103	192	300
	15	0.40	2.5	7.5	25.5	0.40	2.5	7.5	30.0	51.5	31.0	60.5	91.0	66.0	110	185	115	215	335
50	35	0.31	1.9	5.8	19.8	0.31	1.9	5.8	23.2	39.9	24.0	46.9	70.5	51.1	85.2	143	89.1	167	259
	30	0.36	2.2	6.7	22.8	0.36	2.2	6.7	26.8	46.1	27.7	54.1	81.4	59.0	98.4	165	103	192	300
	25	0.40	2.5	7.5	25.5	0.40	2.5	7.5	30.0	51.5	31.0	60.5	91.0	66.0	110	185	115	215	335
60	15	0.47	3.0	8.9	30.2	0.47	3.0	8.9	35.5	60.9	36.7	71.6	107.7	78.1	130	219	136	254	396
	45	0.31	1.9	5.8	19.8	0.31	1.9	5.8	23.2	39.9	24.0	46.9	70.5	51.1	85.2	143	89.1	167	259
	40	0.36	2.2	6.7	22.8	0.36	2.2	6.7	26.8	46.1	27.7	54.1	81.4	59.0	98.4	165	103	192	300
75	35	0.40	2.5	7.5	25.5	0.40	2.5	7.5	30.0	51.5	31.0	60.5	91.0	66.0	110	185	115	215	335
	25	0.47	3.0	8.9	30.2	0.47	3.0	8.9	35.5	60.9	36.7	71.6	107.7	78.1	130	219	136	254	396
	55	0.36	2.2	6.7	22.8	0.36	2.2	6.7	26.8	46.1	27.7	54.1	81.4	59.0	98.4	165	103	192	300
100	50	0.40	2.5	7.5	25.5	0.40	2.5	7.5	30.0	51.5	31.0	60.5	91.0	66.0	110	185	115	215	335
	45	0.44	2.7	8.2	27.9	0.44	2.7	8.2	32.9	56.4	34.0	66.3	99.7	72.3	120	203	126	236	367
	31	0.53	3.3	9.9	33.8	0.53	3.3	9.9	39.8	68.3	41.1	80.3	121	88	146	245	153	285	444
125	75	0.40	2.5	7.5	25.5	0.40	2.5	7.5	30.0	51.5	31.0	60.5	91.0	66.0	110	185	115	215	335
	60	0.51	3.2	9.5	32.3	0.51	3.2	9.5	37.9	65.1	39.2	76.5	115	83.5	139	234	145	272	424
	50	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	86	129	93	156	262	163	304	474
150	100	0.40	2.5	7.5	25.5	0.40	2.5	7.5	30.0	51.5	31.0	60.5	91.0	66.0	110	185	115	215	335
	75	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	85.6	129	93.3	156	262	163	304	474
	55	0.67	4.2	12.5	42.7	0.67	4.2	12.5	50.2	86.2	51.9	101	152	110	184	310	192	360	561
175	125	0.40	2.5	7.5	25.5	0.40	2.5	7.5	30.0	51.5	31.0	60.5	91.0	66.0	110	185	115	215	335
	100	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	85.6	129	93.3	156	262	163	304	474
	75	0.69	4.3	13.0	44.2	0.69	4.3	13.0	52.0	89	53.7	105	158	114	191	320	199	372	580
200	150	0.40	2.5	7.5	25.5	0.40	2.5	7.5	30.0	51.5	31.0	60.5	91.0	66.0	110	185	115	215	335
	125	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	85.6	129	93.3	156	262	163	304	474
	100	0.69	4.3	13.0	44.2	0.69	4.3	13.0	52.0	89.2	53.7	105	158	114	191	320	199	372	580
225	75	0.80	5.0	15.0	51.0	0.80	5.0	15.0	60.0	103	62.0	121	182	132	220	370	230	430	670
	150	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	85.6	129	93.3	156	262	163	304	474
	125	0.69	4.3	13.0	44.2	0.69	4.3	13.0	52.0	89.2	53.7	105	158	114	191	320	199	372	580
250	85	0.86	5.4	16.1	54.7	0.86	5.4	16.1	64.3	110	66.5	130	195	142	236	397	247	461	718
	175	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	85.6	129	93.3	156	262	163	304	474
	150	0.69	4.3	13.0	44.2	0.69	4.3	13.0	52.0	89.2	53.7	105	158	114	191	320	199	372	580
300	100	0.89	5.6	16.8	57.0	0.89	5.6	16.8	67.1	115	69.3	135	203	148	246	414	257	481	749
	200	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	85.6	129	93.3	156	262	163	304	474
	175	0.69	4.3	13.0	44.2	0.69	4.3	13.0	52.0	89.2	53.7	105	158	114	191	320	199	372	580
400	150	0.80	5.0	15.0	51.0	0.80	5.0	15.0	60.0	103	62.0	121	182	132	220	370	230	430	670
	125	0.89	5.6	16.8	57.0	0.89	5.6	16.8	67.1	115	69.3	135	203	148	246	414	257	481	749
	250	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	85.6	129	93.3	156	262	163	304	474
500	200	0.80	5.0	15.0	51.0	0.80	5.0	15.0	60.0	103	62.0	121	182	132	220	370	230	430	670
	125	1.1	6.6	19.8	67.5	1.1	6.6	19.8	79.4	136	82.0	160	241	175	291	489	304	569	886
	350	0.57	3.5	10.6	36.1	0.57	3.5	10.6	42.4	72.8	43.8	85.6	129	93.3	156	262	163	304	474
600	300	0.80	5.0	15.0	51.0	0.80	5.0	15.0	60.0	103	62.0	121	182	132	220	370	230	430	670
	175	1.2	7.5	22.5	76.5	1.2	7.5	22.5	90.0	155	93.0	182	273	198	330	555	345	645	1005

- It is recommended to keep valve outlet velocity below 30,000 ft./min.
- Capacities based on maximum Cv.

WATER CAPACITY TABLE

(M³/Hr)

PRESSURE (BAR)		VALVE SIZE AND PORT																	
		1/2				3/4				1		1-1/2			2				
P1	P2	1/8	3/16	1/4	5/8	1/8	3/16	1/4	5/8	7/8	5/8	7/8	1-1/4	7/8	1-1/4	1-3/4	1-1/4	1-3/4	2-1/4
0.7	0.5	0.03	0.2	0.6	2.0	0.03	0.2	0.6	2.3	4.0	2.4	4.7	7.0	5.1	8.5	14.3	8.9	16.6	25.9
	0.3	0.04	0.3	0.8	2.8	0.04	0.3	0.8	3.3	5.6	3.4	6.6	10.0	7.2	12.0	20.2	12.6	23.5	36.6
1	0.7	0.04	0.2	0.7	2.4	0.04	0.2	0.7	2.8	4.9	2.9	5.7	8.6	6.3	10.4	17.5	10.9	20.4	31.7
	0.5	0.05	0.3	0.9	3.1	0.05	0.3	0.9	3.7	6.3	3.8	7.4	11.1	8.1	13.5	22.6	14.1	26.3	41.0
	0.4	0.05	0.3	1.0	3.4	0.05	0.3	1.0	4.0	6.9	4.2	8.1	12.2	8.8	14.7	24.8	15.4	28.8	44.9
1.5	1	0.05	0.3	0.9	3.1	0.05	0.3	0.9	3.7	6.3	3.8	7.4	11.1	8.1	13.5	22.6	14.1	26.3	41.0
	0.7	0.06	0.4	1.2	3.9	0.06	0.4	1.2	4.6	8.0	4.8	9.4	14.1	10.2	17.0	28.6	17.8	33.3	51.8
	0.6	0.07	0.4	1.2	4.2	0.07	0.4	1.2	4.9	8.5	5.1	9.9	14.9	10.8	18.0	30.4	18.9	35.3	55.0
2	1.5	0.05	0.3	0.9	3.1	0.05	0.3	0.9	3.7	6.3	3.8	7.4	11.1	8.1	13.5	22.6	14.1	26.3	41.0
	1	0.07	0.4	1.3	4.4	0.07	0.4	1.3	5.2	8.9	5.4	10.5	15.7	11.4	19.0	32.0	19.9	37.2	57.9
	0.8	0.08	0.5	1.4	4.8	0.08	0.5	1.4	5.7	9.8	5.9	11.5	17.2	12.5	20.8	35.1	21.8	40.7	63.5
3	2	0.07	0.4	1.3	4.4	0.07	0.4	1.3	5.2	8.9	5.4	10.5	15.7	11.4	19.0	32.0	19.9	37.2	57.9
	1.5	0.08	0.5	1.6	5.4	0.08	0.5	1.6	6.4	10.9	6.6	12.8	19.3	14.0	23.3	39.2	24.4	45.5	71.0
	1.0	0.10	0.6	1.8	6.2	0.10	0.6	1.8	7.3	12.6	7.6	14.8	22.3	16.1	26.9	45.2	28.1	52.6	81.9
3.5	3	0.05	0.3	0.9	3.1	0.05	0.3	0.9	3.7	6.3	3.8	7.4	11.1	8.1	13.5	22.6	14.1	26.3	41.0
	2	0.08	0.5	1.6	5.4	0.08	0.5	1.6	6.4	10.9	6.6	12.8	19.3	14.0	23.3	39.2	24.4	45.5	71.0
	1.5	0.10	0.6	1.8	6.2	0.10	0.6	1.8	7.3	12.6	7.6	14.8	22.3	16.1	26.9	45.2	28.1	52.6	81.9
	1	0.11	0.7	2.1	7.0	0.11	0.7	2.1	8.2	14.1	8.5	16.5	24.9	18.0	30.1	50.6	31.4	58.8	91.6
4	3.5	0.05	0.3	0.9	3.1	0.05	0.3	0.9	3.7	6.3	3.8	7.4	11.1	8.1	13.5	22.6	14.1	26.3	41.0
	3	0.07	0.4	1.3	4.4	0.07	0.4	1.3	5.2	8.9	5.4	10.5	15.7	11.4	19.0	32.0	19.9	37.2	57.9
	2	0.10	0.6	1.8	6.2	0.10	0.6	1.8	7.3	12.6	7.6	14.8	22.3	16.1	26.9	45.2	28.1	52.6	81.9
	1.7	0.10	0.7	2.0	6.7	0.10	0.7	2.0	7.9	13.5	8.1	15.9	23.9	17.3	28.9	48.5	30.2	56.4	87.9
5	4	0.07	0.4	1.3	4.4	0.07	0.4	1.3	5.2	8.9	5.4	10.5	15.7	11.4	19.0	32.0	19.9	37.2	57.9
	3	0.10	0.6	1.8	6.2	0.10	0.6	1.8	7.3	12.6	7.6	14.8	22.3	16.1	26.9	45.2	28.1	52.6	81.9
	2.5	0.11	0.7	2.1	7.0	0.11	0.7	2.1	8.2	14.1	8.5	16.5	24.9	18.0	30.1	50.6	31.4	58.8	91.6
	2.2	0.12	0.7	2.2	7.4	0.12	0.7	2.2	8.7	14.9	9.0	17.5	26.3	19.1	31.8	53.5	33.3	62.2	97.0
6	5	0.07	0.4	1.3	4.4	0.07	0.4	1.3	5.2	8.9	5.4	10.5	15.7	11.4	19.0	32.0	19.9	37.2	57.9
	4	0.10	0.6	1.8	6.2	0.10	0.6	1.8	7.3	12.6	7.6	14.8	22.3	16.1	26.9	45.2	28.1	52.6	81.9
	3.5	0.11	0.7	2.1	7.0	0.11	0.7	2.1	8.2	14.1	8.5	16.5	24.9	18.0	30.1	50.6	31.4	58.8	91.6
8	10	0.10	0.6	1.8	6.2	0.10	0.6	1.8	7.3	12.6	7.6	14.8	22.3	16.1	26.9	45.2	28.1	52.6	81.9
		0.12	0.7	2.2	7.6	0.12	0.7	2.2	9.0	15.4	9.3	18.1	27.3	19.8	33.0	55.4	34.5	64.4	100
		0.14	0.9	2.6	8.8	0.14	0.9	2.6	10.4	17.8	10.7	20.9	31.5	22.8	38.0	64.0	39.8	74.4	116
10	CO CD	0.10	0.6	1.8	6.2	0.10	0.6	1.8	7.3	12.6	7.6	14.8	22.3	16.1	26.9	45.2	28.1	52.6	81.9
	10	0.14	0.9	2.6	8.8	0.14	0.9	2.6	10.4	17.8	10.7	20.9	31.5	22.8	38.0	64.0	39.8	74.4	116
		0.15	1.0	2.9	9.9	0.15	1.0	2.9	11.6	19.9	12.0	23.4	35.2	25.5	42.5	71.5	44.5	83.1	130
12	10	0.10	0.6	1.8	6.2	0.10	0.6	1.8	7.3	12.6	7.6	14.8	22.3	16.1	26.9	45.2	28.1	52.6	81.9
	8	0.14	0.9	2.6	8.8	0.14	0.9	2.6	10.4	17.8	10.7	20.9	31.5	22.8	38.0	64.0	39.8	74.4	116
	6	0.17	1.1	3.2	10.8	0.17	1.1	3.2	12.7	21.8	13.1	25.6	38.6	28.0	46.6	78.4	48.7	91.1	142
	5	0.18	1.1	3.4	11.7	0.18	1.1	3.4	13.7	23.6	14.2	27.7	41.6	30.2	50.3	84.7	52.6	98.4	153
14	10	0.14	0.9	2.6	8.8	0.14	0.9	2.6	10.4	17.8	10.7	20.9	31.5	22.8	38.0	64.0	39.8	74.4	116
	8	0.17	1.1	3.2	10.8	0.17	1.1	3.2	12.7	21.8	13.1	25.6	38.6	28.0	46.6	78.4	48.7	91.1	142
	6	0.20	1.2	3.7	12.5	0.20	1.2	3.7	14.7	25.2	15.2	29.6	44.5	32.3	53.8	90.5	56.3	105	164
15	12	0.12	0.7	2.2	7.6	0.12	0.7	2.2	9.0	15.4	9.3	18.1	27.3	19.8	33.0	55.4	34.5	64.4	100
	10	0.15	1.0	2.9	9.9	0.15	1.0	2.9	11.6	19.9	12.0	23.4	35.2	25.5	42.5	71.5	44.5	83.1	130
	7	0.20	1.2	3.7	12.5	0.20	1.2	3.7	14.7	25.2	15.2	29.6	44.5	32.3	53.8	90.5	56.3	105	164
17	14	0.12	0.7	2.2	7.6	0.12	0.7	2.2	9.0	15.4	9.3	18.1	27.3	19.8	33.0	55.4	34.5	64.4	100
	12	0.15	1.0	2.9	9.9	0.15	1.0	2.9	11.6	19.9	12.0	23.4	35.2	25.5	42.5	71.5	44.5	83.1	130
	10	0.18	1.1	3.4	11.7	0.18	1.1	3.4	13.7	23.6	14.2	27.7	41.6	30.2	50.3	84.7	52.6	98.4	153
	9	0.20	1.2	3.7	12.5	0.20	1.2	3.7	14.7	25.2	15.2	29.6	44.5	32.3	53.8	90.5	56.3	105	164
20	17	0.12	0.7	2.2	7.6	0.12	0.7	2.2	9.0	15.4	9.3	18.1	27.3	19.8	33.0	55.4	34.5	64.4	100
	15	0.15	1.0	2.9	9.9	0.15	1.0	2.9	11.6	19.9	12.0	23.4	35.2	25.5	42.5	71.5	44.5	83.1	130
	9	0.23	1.4	4.3	14.6	0.23	1.4	4.3	17.2	29.5	17.8	34.7	52.2	37.9	63.1	106	66.0	123	192
27	20	0.18	1.1	3.4	11.7	0.18	1.1	3.4	13.7	23.6	14.2	27.7	41.6	30.2	50.3	84.7	52.6	98.4	153
	15	0.24	1.5	4.5	15.3	0.24	1.5	4.5	18.0	30.9	18.6	36.2	54.5	39.5	65.9	111	68.9	129	201
	12	0.27	1.7	5.0	17.1	0.27	1.7	5.0	20.1	34.5	20.8	40.5	61.0	44.2	73.7	124	77.0	144	224


• It is recommended to keep valve outlet velocity below 30,000 ft./min. • Capacities based on maximum Cv

This image shows a full page of white paper with horizontal dotted lines. The lines are evenly spaced and run across the width of the page, providing a guide for handwriting practice. There are no margins, text, or other markings on the page.

CONTROL VALVE

Options & Accessories


PACKING CONFIGURATIONS

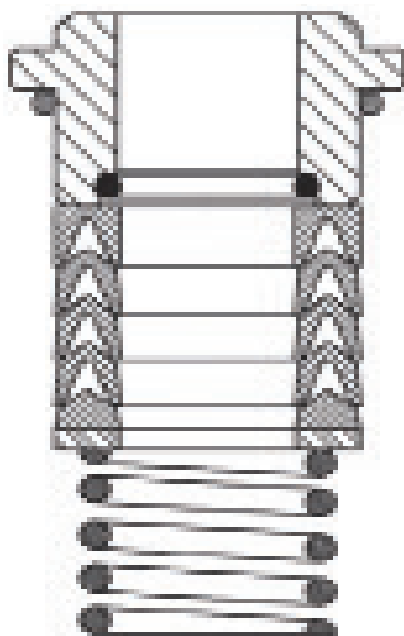

LIVE-LOADED PTFE - V-RING (STANDARD)

Live-loaded PTFE V-ring packing provides the most maintenance free stem seal. The V-ring packing is both pressure energized and live-loaded by a 304 stainless steel spring to automatically compensate for packing wear. Maximum service temperature is 460°F (238°C). V-rings can be inverted for vacuum service.


Available on Boss.

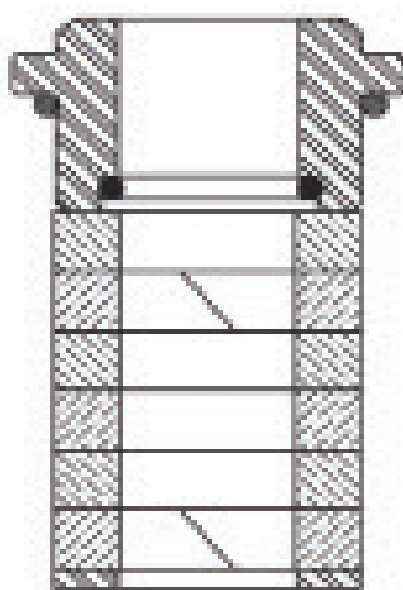

PTFE/GRAPHITE (OPTIONAL)

Split rings allow packing replacement without removal of actuator. Graphite impregnated PTFE provides 500°F (260°C) service temperature, better memory and sealing than pure PTFE rings, lowered stem hysteresis, and is ideal for fluids that contain suspended particles.

Available on Boss.

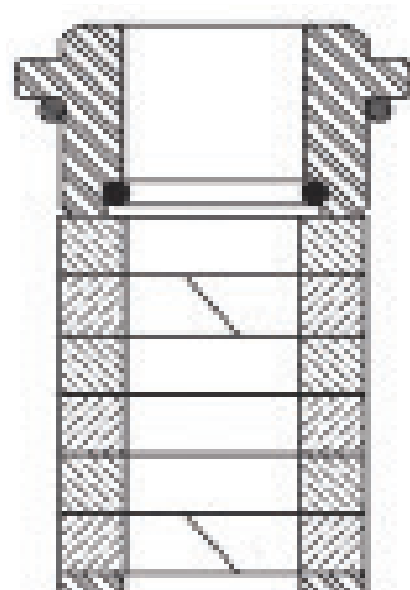

HIGH TEMPERATURE LAMINATED GRAPHITE (OPTIONAL)

Split rings allow packing replacement without removal of actuator. Precision die-cut laminated graphite rings provide a reliable, tight stem seal to operating temperatures of 800+°F (426°C).

Available on Boss.

ACTUATORS



K1, K4

- Pneumatic Actuated
- 36 and 60 sq. in.
- High Thrust Multiple Spring
- Epoxy Coated
- stainless Steel Internals
- Fixed 3-15 pound Springs
- Cast Iron Yoke



K5, K6

- Electric Actuated
- Accepts 0-10vDC, 4-20mA or 0-135 ohm signal
- Spring Return to Fail Safe Position
- Manual Override
- NEMA 1 Enclosure
- Powder Coated Die Cast Aluminum Housing

ELECTRO-PNEUMATIC (I/P) TRANSDUCER


- Converts Current Signal to Pneumatic Signal
- Handles up to 150 PSIG Supply Air
- Accommodates 4-20 mA and 10-50 mA Input Signals

SPECIFICATION

Electro-pneumatic Transducer shall convert 4-20 mA or 10-50 mA input signals to a proportional 3-15 PSIG pneumatic output. Output capacity shall be a minimum of 17 SCFM with a 20 PSIG supply or 47 SCFM with a 120 PSIG supply.

MATERIALS OF CONSTRUCTION

Housing	Aluminum
Orifice	Sapphire
Nozzle	Bronze
PC Board	Fiberglass
Cover	Aluminum

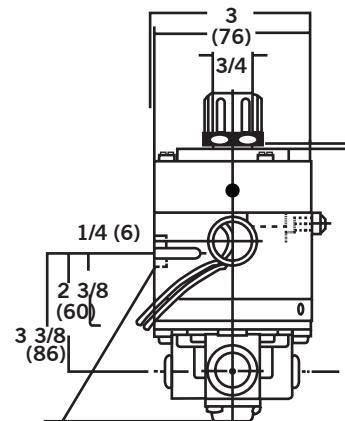

ELECTRO-PNEUMATIC TRANSDUCER

APPLICATION DATA

- Simple way to control pneumatic valves with current signal

RTD RESISTANCE PROBE THERMOMETER

- 304 SS closed end probe measures temperature
- Varies electrical resistance in proportion to temperature changes
- Communicates change in resistance to automated systems

OPTIONS

- 304 SST Thermowell

SPECIFICATION

The RTD shall have a 304 stainless steel closed end probe with a 1/2 inch NPT male with hex fitting process connection. The RTD shall change resistance in proportion to a change in temperature and be capable of connecting to a device (such as a signal conditioning card) which can convert that resistance change to a standard 4-20 mA signal.

MATERIALS OF CONSTRUCTION

Connector Head: NB 1 Cast Iron
 Probe 304 SS Closed End
 Process Connection: 1/2" NPT Male w/Hex fitting
 Electrical Connection: 1/2" NPT Female
 Sheath Length 5 1/2" or 11 1/2"
 Sheath Diameter 1/4"



**RTD RESISTANCE
PROBE THERMOMETER**

APPLICATION DATA

- Building control systems
- Process control systems
- Systems utilizing the EPC Electro Pneumatic controller

ELECTRONIC PRESSURE TRANSMITTER



**ELECTRONIC
PRESSURE TRANSMITTER**

- Solid state, calibrated transmitter measures pressure to $\pm 0.5\%$ accuracy
- Outputs 4-20 mA signal; 10-30 VDC unregulated; 100 ohms output impedance
- Integral metal diaphragm and polysilicon bridge are virtually unaffected by shock, vibration or mounting
- Available in ranges 0-30, 0-300 and 0-1000 psig, overpressure protected
- NEMA 4 compliant with cable or waterproof connector
- Operates in 40-200°F
- 1/8 NPT male or female process connection

SPECIFICATION

The Electronic Pressure Transmitter shall have a 1/8 NPT male or female 316 stainless steel process connection. The Electronic Pressure Transmitter shall measure pressure to $\pm 0.5\%$ accuracy and output a standard 4-20 mA signal with 100 ohms output impedance. The Electronic Pressure Transmitter shall be shock and vibration resistant, overpressure protected, operate within 40-200°F and be NEMA 4 compliant.

MATERIALS OF CONSTRUCTION

Case: 304 SS
 Diaphragm: 17-4 PH SS
 Process Connection: 316 SS

APPLICATION DATA

- Building control systems
- Process control systems
- Systems utilizing the EPC Electro Pneumatic controller

ECKARDT POSITIONER



ECKARDT PNEUMATIC POSITIONER W/GAUGES

APPLICATION DATA

- Control of Control Valve
- Split Range for Parallel Stations
- Fine Tune Control
- Where Required Air Pressure is Greater than Controller Output
- Where Change of Actuator Action is Desired (Reverse to Direct & vice versa)

RATINGS

Temperature Range	-40 to 176°F (-40 to 80°C)
Pneumatic Connections	1 /4" NPT
Supply Pressure	60 psig
Air Consumption	0.11 to 0.21 SCFM
Input Signal	3-15 psig, Split Range, 4-20mA*
Hysteresis	≤0.3%
Body Construction	Aluminum

APPLICABLE CODES

SIRA & WIB Approved

- Pneumatic or Electro-Pneumatic
- Modular Design
- Boost Adjustable
- Separate Control for Zero Point and Range of Travel

OPTIONS

- Gages


MODELS

P6981 Pneumatic Positioner

EP6986 Electro-pneumatic Positioner

SPECIFICATION

The positioner shall be SIRA and WIB approved and shall be mounted directly onto the valve. Feedback, 1/P Transducer and/or Limit Switch options shall be available.

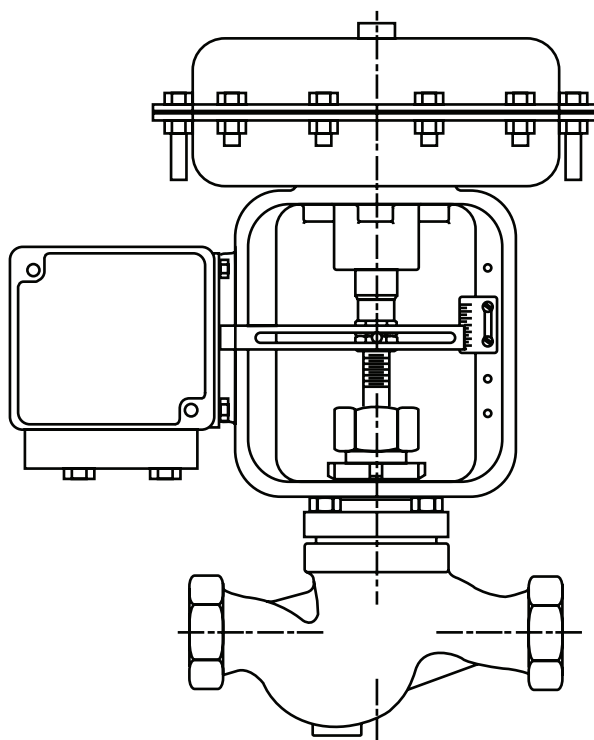

ECKARDT P6981 POSITIONER ON TYPE J CONTROL VALVE

*Applies to EP6986 only

PMV POSITIONER



APPLICATION DATA

- Control of Control Valves
- Split Range for Parallel Stations
- Fine Tune Control
- Where Required Air Pressure is Greater than Controller Output
- Where Change of Actuator Action is Desired (Reverse to Direct & vice versa)

RATINGS

Temperature Range	-4 to 185°F (-20 to 85°C)
Supply Pressure	60 psig
Air Consumption	0.31 SCFM (P4) 0.71 SCFM (P5) 0.78 SCFM (EP5)
Input Signal	3-15 psig, Split Range 4-20 mA
Linearity	±0.7% (P4) 0.5% (P5 & EP5)
Hysteresis	0.8% (P4) 0.75% (P5) 0.5% (EP5)
Body Construction	Aluminum

APPLICABLE CODES

CENELEC, FM & CSA approved

- Pneumatic or Electro-Pneumatic
- Compact, Rugged Design
- Easy to Calibrate
- Bright, Visible Indicator
- Low Air Consumption
- Mounts Compactly on Valve
- Stainless Steel Cam
- External Zero Adjustment
- Modular Design

OPTIONS

- Mechanical Limit Switch
- Proximity Limit Switch
- 4-20 mA Position Transmitter Feedback
- Potentiometer 1K Feedback
- Gauges


MODELS

P5 Pneumatic Positioner w/Gauges

EP5 Electro-pneumatic Positioner w/Gauges

SPECIFICATION

The Positioner shall be modular and cam characterized with FM, CSA and CENELEC certifications and shall be mounted directly onto the valve. Feedback, I/P Transducer and/or Limit Switch options shall be available

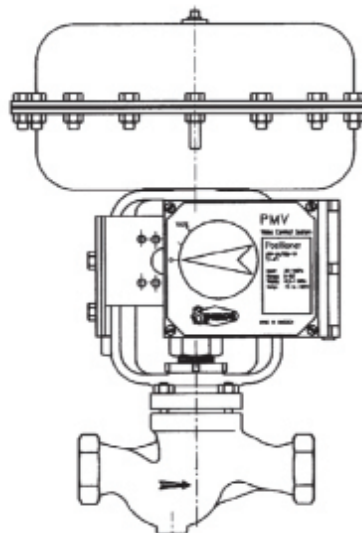

**PMV POSITIONER
ON TYPE J CONTROL VALVE**

MOORE POSITIONER

- Pneumatic or Electro-Pneumatic
- Modular Design
- Cam Characterized for Added Turndown
- Gauges Included
- Proportional Control
- Easy to Calibrate
- Non-Interacting Zero and Span
- Mounts compactly on Valve
- Provides Precise Control

OPTIONS

- Mechanical Limit Switch
- Proximity Limit Switch
- 4-20 mA Position Transmitter Feedback
- Potentiometer 1K Feedback


MODELS

760P Pneumatic Positioner

760EP Electro-pneumatic Positioner w/Integral I/P Transducer

SPECIFICATION

The Positioner shall be modular and cam characterized with NEMA 4X, FM, CSA, CENELEC and Sira certifications and shall be mounted directly onto the valve. Feedback, I/P Transducer and/or Limit Switch options shall be available. The Positioner shall include gauges, have non-interacting zero and span and consume 0.5 to 0.6 SCFM.

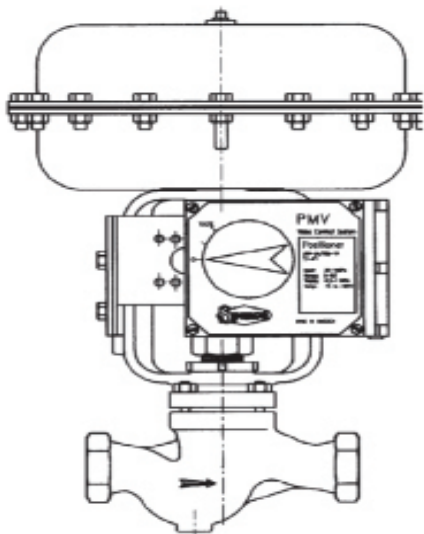

**MOORE 760P POSITIONER
ON TYPE J CONTROL VALVE**



MOORE 760P PNEUMATIC POSITIONER

APPLICATION DATA

- Control of Control Valves
- Split Range for Parallel Stations
- Fine Tune Control
- Where Required Air Pressure is Greater than Controller Output
- Where Change of Actuator Action is Desired (Reverse to Direct & vice versa)

RATINGS

Temperature Range	-40 to 185°F (-40 to 85 °C)
Pneumatic Connections	1/4" NPT
Gauge Connections	1/8" NPT
Electrical Connections	3/4" NPT
Exhaust Connections	1/4" NPT
Action	Direct or Reverse
Supply Pressure	60 psig
Air Consumption, Typical	0.5 SCFM
Input Signal	3-15 psig, Split Range, 4-20 mA*
Span	Adjustable, -60% to +25% of normal
Zero	Adjustable, -10% to +60% of normal
Linearity, Typical	0.5% of normal span 0.75% of normal span*
Hysteresis, Typical	0.75% of normal span 1.0% of normal span*
Dead band	0.25% of span

APPLICABLE CODES

NEMA 4X, IP 65

FM, CSA, CENELEC, Sira Approved

*Applies to 760EP only

[illegible]

CONTROL VALVE SIZING

VALVE SIZING BY COMPUTATION

C_v = Valve flow coefficient
 D = Nominal pipe size, inches
 d_p = Nominal Valve size, inches
 F_L = Pressure recovery factor, Liquid (See valve page)

F_p = Piping geometry factor, which is a capacity correction factor for a valve with reduced inlet and expanded outlet piping of the same size or a valve with expanded outlet piping only. (See table on facing page.)

$$= \frac{1}{\sqrt{\frac{890D^4}{\sum k C_v^2}}} + 1$$

F_R = Valve Reynolds Number factor
 = 1 if $C_v > 0.1$ and viscosity < 1000 cs.
 (consult factory for other applications)

G = Specific gravity of liquid at flowing temperature

K = Specific heat ratio (see table)
 C_p = Specific heat at constant pressure
 C_v = Specific heat at constant volume

M = Molecular weight (See table)

P_1 = Initial fluid pressure psia

$$= [p_1 (\text{psig}) + 14.7]$$

P_2 = Reduced fluid pressure psia
 $= [p_2 (\text{psig}) + 14.7]$

P_c = Critical pressure of liquid
 (water = 3206 psia)

P_v = Vapor pressure of liquid at inlet temperature
 (water @ 60°F = 0.2563 psia)

ΔP = Comparative fluid pressure factor

$$= P_1 - P_2$$

ΔP_c = Critical pressure drop (psi)

$$= P_1 - .96 P_v + .28 \sqrt{\frac{P_v^3}{P_c}}$$

Q = Flow - SCFM or GPM

T_1 = Initial absolute temperature of gas
 $= [t_1 (^\circ\text{F}) + 460]$

W = Flow - lb/hr

X_T = Pressure recovery factor, Gas (See valve page)

Z = Compressibility factor (Typically = 1)

$\sum k$ = Valve/piping friction factor

$$1.5 \left(1 - \frac{d^2}{D^2} \right)^2$$

STEAM MASS

$$C_v = \frac{W}{19.3 F_p P_1 Y F_R} \sqrt{\frac{T_1 Z}{X M}}$$

GAS (VOLUME)

$$C_v = \frac{Q}{7320 F_p P_1 Y F_R} \sqrt{\frac{T_1 M Z}{X}}$$

SUBCRITICAL FLOW

$$\text{If } X < \frac{X_T K}{1.4}$$

$$X \frac{\Delta P}{P_1} = \frac{P_1 - P_2}{P_1}$$

$$Y = 1 - \frac{X}{2.14 X_T K}$$

$$\text{if } X \geq \frac{X_T K}{1.4}$$

$$X \frac{X_T K}{1.4}$$

$$Y = .667$$

CRITICAL FLOW

LIQUID (VOLUME)

SUBCRITICAL FLOW

$$\text{IF } \Delta P < \Delta P_c F_L^2$$

$$C_v = \frac{Q}{F_p F_R \sqrt{\frac{\Delta P}{G}}}$$

CRITICAL FLOW

$$\text{IF } \Delta P \geq \Delta P_c F_L^2$$

$$C_v = \frac{Q}{F_L F_p F_R \sqrt{\frac{\Delta P}{G}}}$$

AVERAGE OF K & M TABLE

	K	M
Air	1.4	29
Nitrogen	1.404	28
Oxygen	1.401	32
Hydrogen	1.41	2
Carbon Dioxide	1.304	44
Steam	1.31	18.3

TYPE J PIPING GEOMETRY FACTORS

F_p
for Expanded Outlet Only

d/D	Valve Size	1/2		3/4			1				1 1/2			2		
	Port Size	1/4	5/8	1/4	5/8	7/8	1/4	5/8	7/8	1 1/4	7/8	1 1/4	1 3/4	1 1/4	1 3/4	2 1/4
1		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
.9		1.0	1.03	1.0	1.01	1.04	1.0	1.0	1.02	1.06	1.0	1.01	1.04	1.0	1.02	1.05
.8		1.0	1.05	1.0	1.02	1.07	1.0	1.01	1.04	1.09	1.01	1.02	1.06	1.01	1.03	1.07
.7		1.0	1.05	1.0	1.02	1.07	1.0	1.01	1.04	1.1	1.01	1.02	1.06	1.01	1.03	1.08
.6		1.0	1.05	1.0	1.02	1.07	1.0	1.01	1.04	1.09	1.01	1.02	1.06	1.01	1.03	1.07
.5		1.0	1.04	1.0	1.02	1.05	1.0	1.0	1.03	1.07	1.01	1.02	1.05	1.01	1.02	1.06
.4		1.0	1.03	1.0	1.01	1.04	1.0	1.0	1.02	1.05	1.0	1.01	1.03	1.0	1.01	1.04
.3		1.0	1.02	1.0	1.01	1.02	1.0	1.0	1.01	1.03	1.0	1.01	1.02	1.0	1.01	1.02

F_p
for Reduced Inlet & Expanded Outlet of the Same Size

d/D	Valve Size	1/2		3/4			1				1 1/2			2		
	Port Size	1/4	5/8	1/4	5/8	7/8	1/4	5/8	7/8	1 1/4	7/8	1 1/4	1 3/4	1 1/4	1 3/4	2 1/4
1		1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
.9		1.0	.995	1.0	.997	.993	1.0	.999	.996	.992	.999	.998	.994	.999	.997	.992
.8		.998	.981	.999	.991	.976	1.0	.997	.987	.971	.997	.992	.978	.997	.989	.974
.7		.997	.963	.999	.983	.953	.999	.993	.974	.945	.994	.984	.958	.993	.978	.95
.6		.995	.945	.998	.974	.929	.999	.989	.96	.917	.991	.976	.936	.99	.967	.925
.5		.993	.926	.998	.965	.906	.999	.985	.947	.891	.988	.967	.915	.986	.955	.90
.4		.991	.91	.997	.956	.886	.999	.981	.935	.868	.985	.96	.897	.983	.944	.88
.3		.99	.897	.997	.95	.87	.999	.979	.925	.85	.982	.953	.882	.98	.936	.862

LINEAR VALVE SPECIFICATION FORM

 EMERSON CONTROL VALVE SPEC SHEET	Project/Job Unit/customer P.O./LCO File # item Contract MFR Serial#		Data Sheet of..... Spec Tag Dwg Service		
	Fluid ☐ Steam ☐ Water ☐ Gas ☐ Liquid		Crit Pres PC		
Service Conditions Flow ☐ #/hr ☐ gpm ☐ scfh ☐ Inlet pressure ☐ psig ☐ psia ☐ Outlet pressure ☐ psig ☐ psia ☐ Temperature ☐ °C ☐ °F ☐ Max Press/Temperature:...../..... Density/MW/SG:...../...../..... Viscosity cP Vapor Pressure ☐ psia ☐ Required Cv Noise (dBA) Allowable		Max.Flow 	Norm.Flow 	Min.Flow 	shut-offpressure
Line Info Pipe Size In...../Sch..... Pipe Size Out...../Sch.....					
Valve, Body & Bonnet Body Size ☐ 1/2 ☐ 3/4 ☐ 1 ☐ 1 1/2 ☐ 2 ☐ 2 1/2 ☐ 3 ☐ 4 ☐ 6 ☐ 8 ☐ 10 ☐ 12 ANSI Class ☐ 120 ☐ 150 ☐ 250 ☐ 300 ☐ 600 ☐ 900 ☐ 1500 ☐ 2500 ☐ 4500 ☐ Other Body/Bonnet Material: ☐ Cast Iron ☐ Cast Steel ☐ Cr Mo ☐ 316SS ☐ Bronze ☐ Hast C ☐ Titanium ☐ Alloy 20 ☐ Other End Conn. Inlet/Outlet: ☐ NPT ☐ SWE ☐ BWE Sch..... ☐ Sep.Flanges ☐ Int. Flanges ☐ Other Packing Material: ☐ PTEE ☐ BTG ☐ Laminated Graphite ☐ Kalrez ☐ Other					
Trim Size ☐ 100% ☐ 60% ☐ 40% ☐ 20% ☐ Other					
Actuator Spring Action: ☐ Air to Open ☐ Air to Close ☐ Last Position ☐ None Available Air Supply Pressure: ☐ Max ☐ Min Manual Override: ☐ Yes ☐ No ☐ Type					
Solenoid ☐ Yes ☐ No ☐ Type ☐ Voltage					
Positioner ☐ Yes ☐ No ☐ Type ☐ Pneu ☐ I/P					
Switch ☐ Yes ☐ No ☐ Type					
Air Set ☐ Yes ☐ No ☐ Type..... ☐ Range.....					
Other Accessories ☐ Yes ☐ No ☐ Type.....					
Test ANSI/FCI Leakage Class: ☐ II ☐ III ☐ IV ☐ V ☐ VI ☐ Leslie VIII					

SECTION III

DESUPERHEATERS & NOISE REDUCTION

This image shows a full page of white paper with horizontal dotted lines. The lines are evenly spaced and run across the width of the page, providing a guide for handwriting practice. There are no margins, text, or other markings on the page.

DESUPERHEATERS

DESUPERHEATERS



STEAM ATOMIZING DESUPERHEATER

PRESSURES to 600 PSIG at 750°F

- Reduces the temperature of superheated steam by controlled direct injection of cooling water
- Mechanical atomizing 2.5:1 turndown
- Steam atomizing 20:1 turndown
- Line Sizes 311 to 2411 {larger sizes available upon request}
- Velocities to 8000 feet per minute
- Air operated only

CANADIAN REGISTRATION# OH6267.51



APPLICATION DATA

- Reduce Temperature of Superheated Steam

SIZING INFO PAGE 184

MECHANICAL ATOMIZING DIMENSIONS, inches (mm) AND WEIGHTS, pounds (kg)

Size Weight	B	H	K	A													
				P = MAIN STEAM PIPE													
				3	3 1/2	4	5	6	8	10	12	14	16	18	20	24	
#1	5 (127)	1/4 (6)	2 (51)	7 (178)	7 1/2 (191)	8 1/2 (216)	10 (254)	11 (280)	13 (330)	— —	— —	— —	— —	— —	— —	— —	15 (6.8)
#3	4 1/2 (113)	1/2 (13)	2 (51)	— —	— —	8 1/2 (216)	10 (254)	11 (280)	13 (330)	15 1/2 (394)	16 1/2 (419)	— —	— —	— —	— —	— —	22 (10)
#5	5 7/8 (149)	1 (25)	4 (102)	— —	— —	— —	— —	11 (280)	13 (330)	15 1/2 (394)	16 1/2 (419)	17 1/2 (445)	19 1/2 (495)	— —	— —	— —	40 (18)
#6	7 1/2 (190)	1 1/4 (32)	4 (102)	— —	— —	— —	— —	— —	13 (330)	15 1/2 (394)	16 1/2 (419)	17 1/2 (445)	19 1/2 (495)	21 1/2 (546)	— —	— —	75 (34)
#8	9 3/16 (233)	2 (51)	6 (152)	— —	— —	— —	— —	— —	— —	15 1/2 (394)	16 1/2 (419)	17 1/2 (445)	18 1/2 (470)	19 1/2 (495)	20 1/2 (521)	22 1/4 (565)	135 (61)

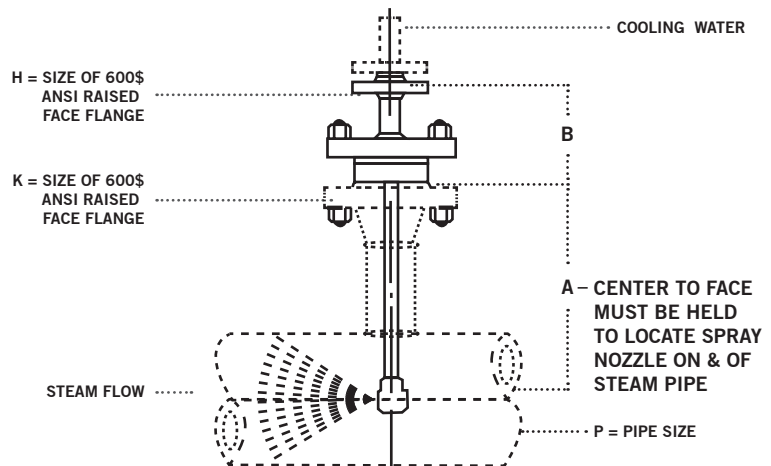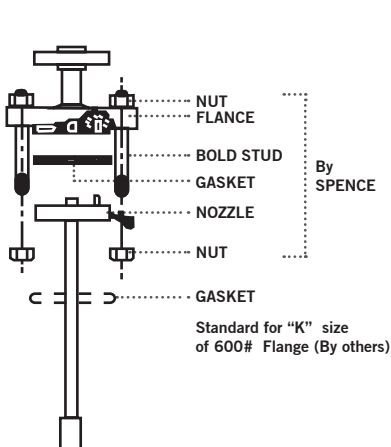


DESUPERHEATERS

SPECIFICATION

The Desuperheater shall be air operated, consisting of atomizing injector nozzle, dual controller, air pilot and strainers. It shall be capable of handling wide load variations from full load to 5% of maximum and control within $\pm 5^{\circ}\text{F}$.

The injector nozzle shall be designed and installed to disperse the minute water particles and atomizing steam counter to the flow of superheated steam, enabling the fine mist to be easily evaporated.

The dual controller shall be so constructed that it will maintain a balanced, modulated flow of steam and water to the injector nozzle at all times and shall be so arranged that the atomizing steam shall lead the water on opening and trail on closing, so that it is impossible for the water to reach the injector nozzle before the steam.

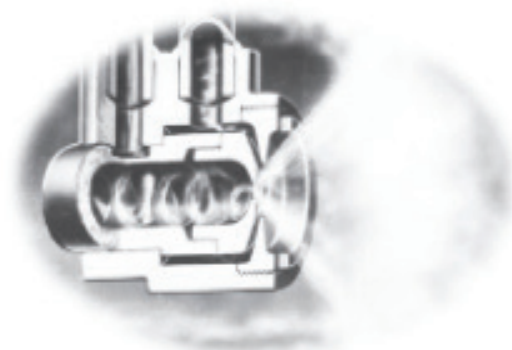



**DUAL CONTROL
DESUPERHEATER NOZZLE**

MATERIALS OF CONSTRUCTION

300 Series Stainless Steel

STEAM ATOMIZING DIMENSIONS, inches (mm) AND WEIGHTS, pounds (kg)

Size Weight	B	H	J	K	A													
					P = MAIN STEAM PIPE													
					3	3 ^{1/2}	4	5	6	8	10	12	14	16	18	20	24	
#1	5 (127)	1/4 (6)	3 3/4 (95)	2 (51)	7 (178)	7 1/2 (191)	8 1/2 (216)	10 (254)	11 (280)	13 (330)	— —	— —	— —	— —	— —	— —	— —	18 (81)
#3	5 1/4 (133)	1/2 (13)	2 1 1/16 (51)	2 1/2 (64)	— —	— —	8 1/2 (216)	10 (254)	11 (280)	13 (330)	15 1/2 (394)	16 1/2 (419)	— —	— —	— —	— —	— —	28 (13)
#5	5 7/8 (148)	1 (25)	3 3/4 (95)	4 (102)	— —	— —	— —	— —	11 (280)	13 (330)	15 1/2 (394)	16 1/2 (419)	17 1/2 (445)	19 1/2 (495)	21 1/2 (546)	23 1/2 (597)	27 1/2 (699)	68 (31)
#6	6 9/16 (243)	1 1/4 (32)	6 (152)	5 (127)	— —	— —	— —	— —	— —	13 (330)	15 1/2 (394)	16 1/2 (419)	17 1/2 (445)	19 1/2 (495)	21 1/2 (546)	— —	— —	110 (50)
#8	8 1/4 (210)	2 (51)	6 (152)	8 (203)	— —	— —	— —	— —	— —	— —	15 1/2 (394)	16 1/2 (419)	17 1/2 (445)	18 1/2 (470)	19 1/2 (495)	23 1/2 (597)	27 1/2 (699)	270 (123)

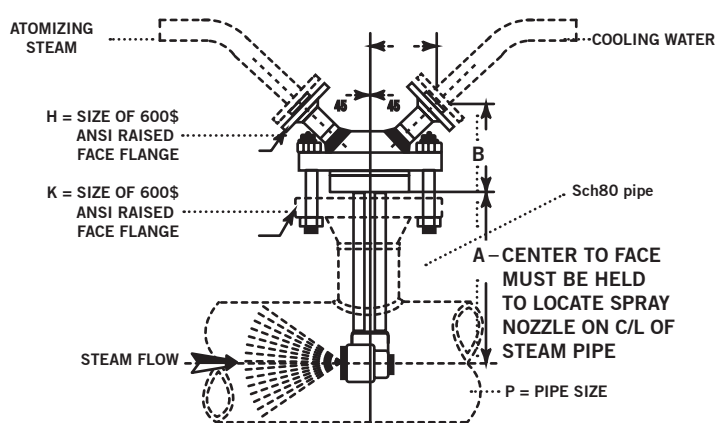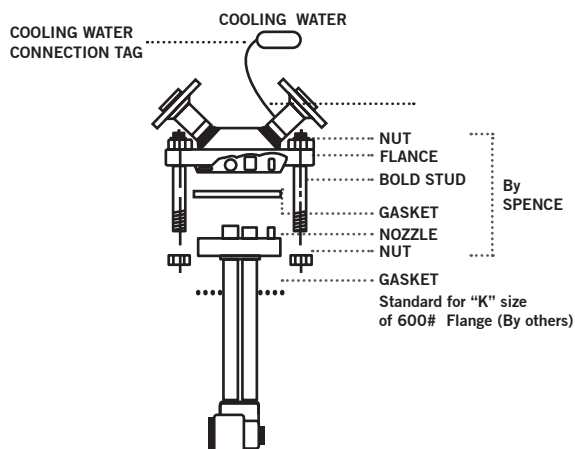

RULES FOR SIZING DESUPERHEATERS

The required amount of cooling water to be injected into the superheated steam is the basis on which a Desuperheater size is determined. Since the heat gained by the injected cooling water equals the heat lost by the superheated steam, the required cooling water, G, in gallons per minute is calculated as follows:

$$G = \frac{W_s}{500} \times \frac{h_s - h_d}{h_d - (t - 32)} \text{ gpm}$$

Where: W_s = Superheated steam flow, lb per hour

h_s = Total heat of the superheated steam, Btu per lb

h_d = Total heat of the desuperheated steam, Btu per lb

t = Temperature of the cooling water, °F

The values h_s and h_d may be taken from the Steam Tables from pages 274 and 275. Having determined the amount of cooling water, G, choice of the size unit may be made directly from the Selection table below.

Cooling water supply pressure must always be at least 75 psig higher than the pressure of the steam being desuperheated.

With Steam Atomizing Desuperheaters, the atomizing steam pressure must always be at least 50 psig higher than the pressure of the steam being desuperheated. Also, when there is more than approximately 100 psig difference between cooling water and atomizing steam pressures, a pressure reduction should be made on the higher of the two.

SELECTION TABLE-STEAM ATMOZING AND MECHANICAL ATMOZING DESUPERHEATERS

	J VALVE OPERATED			
SIZE NUMBER	No. 3	No. 5	No. 6	No. 8
COOLING WATER CAPACITY, GPM	4.0	12	22	52
PIPE CONNECTIONS FOR COOLING WATER AND ATMOZING STEAM	1/2"	1"	1 1/4"	2"
MINIMUM SIZE OF MAIN STEAM PIPE	4"	6"	8"	12"

A source of higher pressure atomizing steam offers no problem on most desuperheater installations. Generally, the steam being desuperheated is at reduced pressure, having either been throttled by a reducing valve or extracted from an intermediate stage of a turbine.

When a pressure reduction is required in conjunction with desuperheating the steam, it is recommended that the reduction take place prior to desuperheating for the following reasons:

1. Auxillary high pressure steam for atomization is immediately available

2. The pressure Regulator is not subject to a damaging accumulation of soluble salts precipitated by evaporation from the cooling water.
3. Elimination of resuperheating when the pressure reduction is after the point of superheat control.

If higher pressure steam is not available, a Mechanical Atomizing Desuperheater must be employed. The Injector Nozzle is identical with the Steam Atomizing Nozzle except that it does not have the advantage of secondary atomization into mist by the action of the steam.

NOISE REDUCTION

NOISE SUPPRESSOR



NOISE SUPPRESSORS

APPLICATION DATA

- Steam Pressure Reduction Stations where Noise Reduction is Desired

SUPPRESSOR ENDS

INLET ANSI	OUTLET ANSI
NPT.....	NPT
NPT.....	150#
NPT.....	300#
150#.....	150#
300#.....	150#
300#.....	300#

NOTE: ANSI 150# Flanges are flat faced.

It is recommended that the Noise Suppressor be insulated to reduce condensation formation in the acoustic material.

SIZING INFO PAGE 189

SERVICE to 500°F

- Standard sizes 3/8" to 8". Consult Factory for additional sizes
- Effective over a broad frequency band (up to 12,000 Hz)
- Noise attenuation up to 26 dBA
- Expansion fittings not required
- Straight through design minimizes pressure drop, permitting normal valve sizing

Canadian Registration # CSA-OH 6266.5R1C

DIMENSIONS inches (mm) AND WEIGHTS, pounds (kg) INLET SIZE 2 1/2" TO 8"

NOMINAL PIPE SIZE			D'-INSTALLED LENGTH		APPROX. WEIGHT		Average Attenuation dBA
A	B	C	150#	300#	150#	300#	
INLET	OUTLET	SHELL	x	x	x	x	
2 1/2	4	6	47	47	97	109	16
(65)	(100)	(150)	(1010)	(1194)	(44)	(49)	
2 1/2	15	6	47 1/2	48 1/8	99	115	16
(65)	(125)	(150)	(1200)	(1222)	(45)	(52)	
3	4	6	47	47 3/4	99	103	14
(80)	(100)	(150)	(1009)	(1214)	(45)	(47)	
3	5	6	47 1/2	48 1/4	101	119	14
(80)	(125)	(150)	(1207)	(1227)	(46)	(54)	
3	6	8	58 9/16	59 5/16	150	181	19
(80)	(150)	(200)	(1488)	(1506)	(68)	(82)	
4	5	6	47 3/4	48 1/8	105	129	12
(100)	(125)	(150)	(1214)	(1222)	(48)	(59)	
4	6	8	54 3/4	55 1/2	162	178	16
(100)	(150)	(200)	(1392)	(1410)	(74)	(81)	
4	8	10	66 1/4	67	256	299	21
(100)	(200)	(250)	(1684)	(1702)	(116)	(134)	
5	6	8	55 1/4	56	180	167	14
(125)	(150)	(200)	(1405)	(1422)	(82)	(76)	
5	8	10	66 3/4	67 1/2	289	247	19
(125)	(200)	(250)	(1696)	(1715)	(131)	(130)	
5	10	12	89 5/16	90 5/16	455	428	26
(125)	(250)	(300)	(2268)	(2294)	(207)	(194)	
6	8	10	66 3/4	67 1/2	295	299	17
(150)	(200)	(350)	(1697)	(1715)	(134)	(136)	
6	10	12	83 3/4	84 3/4	451	490	24
(150)	(250)	(300)	(2129)	(2154)	(205)	(222)	
8	10	12	84 1/4	85 1/4	468	507	21
(200)	(250)	(300)	(2141)	(2166)	(213)	(230)	

* +1/4" for 8" Shell and under, otherwise ± 3/8".

+ Consult factory for specifics.


NOISE SUPPRESSOR

SPECIFICATION

Noise Suppression equipment shall be of the dissipative reactive type. Suppressor shall not induce back pressure. It shall have expanded outlet flange for attachment to downstream piping. Equipment shall provide a minimum of 10 dBA reduction in noise. Installation must be insulated.

MATERIALS OF CONSTRUCTION

Pressure Shell Welded Steel Components
Acoustic Material Stainless Steel

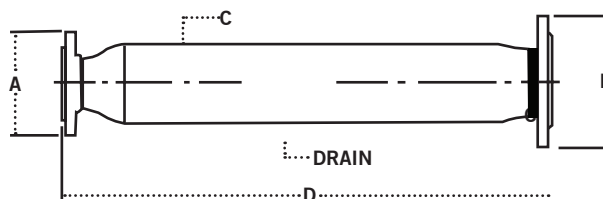

MAXIMUM OUTLET VELOCITY feet per minute (meters per minute)

NOMINAL PIPE SIZE	NOMINAL PIPE SIZE
0 - 2 (0 - 51)	17,000 (5182)
2 1/2 - 8 (64 - 203)	11,000 (3353)
>8 (>203)	9,000 (2734)


DIMENSIONS inches (mm) AND WEIGHTS pounds (kg) INLET SIZES 3/8" to 2"

NOMINAL PIPE SIZE			D* — INSTALLED LENGTH			APPROX. WEIGHT					Average Attenuation dBa1 [†]
A INLET	B OUTLET	C SHELL	NPTxNPT	NPTxNPT	300x300#	NPT x NPT	150# x 150#	300# x 300#	150# x 150#	300# x 300#	
3/8 (10)	3/4 (20)	2 (50)	18 (457)								16
3/8 (10)	1 (25)	2 (50)	18 5/16 (465)								16
3/8 (10)	1 1/2 (40)	3 (80)	26 5/8 (676)								22
1/2 (15)	1 (25)	2 (50)	21 5/16 (541)	19 7/8 (505)	2016 (516)				12 (5.4)	13 (5.9)	12
1/2 (15)	1 1/4 (32)	2 1/2 (65)	23 15/16 (608)	22 1/8 (561)	22 5/8 (575)				15 (6.8)	17 (7.7)	15
1/2 (15)	1 1/2 (40)	3 (80)	27 1/16 (687)	25 5/8 (650)	22 1/16 (662)	19 (9)	26 (12)	29 (13)			20
3/4 (20)	1 1/4 (32)	3 (80)	28 3/8 (721)	26 5/8 (676)	27 1/8 (689)	19 (9)	25 (11)	28 (13)			16
3/4 (20)	2 (50)	3 (80)	28 5/8 (727)	26 5/8 (676)	27 1/8 (689)	19 (9)	31 (14)	34 (15)			16
1 (25)	1 1/2 (40)	3 (80)	25 3/4 (654)	23 7/8 (607)	24 3/8 (619)	18 (8)	27 (12)	31 (14)			12
1 (25)	2 (50)	4 (100)	36 (914)	34 (864)	34 1/2 (876)	28 (13)	33 (15)	36 (16)			13
1 1/4 (32)	2 (50)	4 (100)	36 1/16 (916)	34 1/16 (86)	34 5/8 (889)	29 (13)	34 (15)	38 (17)			14
1 1/4 (32)	3 (80)	4 (100)		34 5/16 (872)	35 (889)		34 (15)	39 (18)			14
1 1/2 (40)	3 (80)	4 (100)		31 7/16 (798)	32 1/16 (814)		31 (14)	34 (15)			12
2 (50)	3 (80)	4 (100)		31 1/2 (800)	32 1/8 (816)		37 (17)	45 (20)			10
2 (50)	4 (100)	5 (125)		39 3/4 (1010)	40 3/8 (1026)		67 (30)	69 (31)			14

* ±1/4" for 8" Shell and under, otherwise ± 3/8".

† Consult factory for specifics.

MUFFLING ORIFICE PLATES (MOPS)

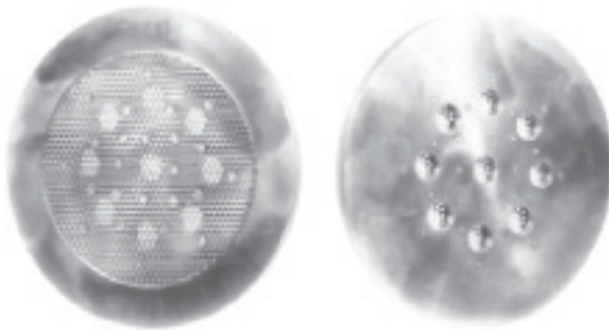

INLET


OUTLET

MUFFLING ORIFICE


APPLICATION DATA

- Spence Pressure Regulators or Control Valves where noise reduction is desired

SIZING INFO PAGE 193

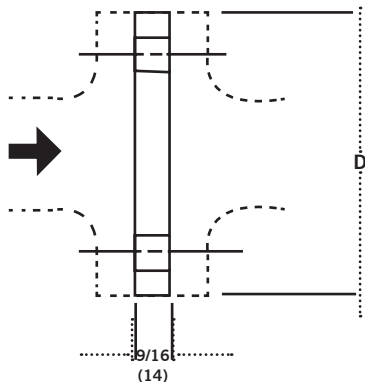

ANSI 125 & 150 FLANGED

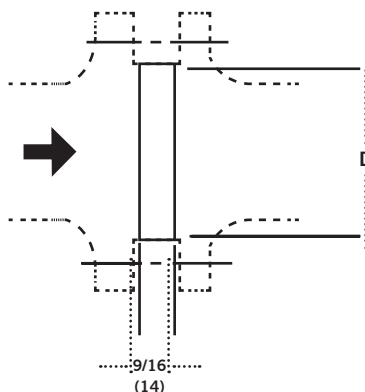

ANSI 250, 300 & 600 FLANGED

- Reduces noise by 6 dBA to 12 dBA
- Engineered for each application
- Designed to fit between ANSI flanges (DIN upon request)
- For noise reduction estimates, consult your Representative.

Canadian Registration # CSA-OH 6266.5R1C

MATERIALS OF CONSTRUCTION

Plate..... Steel ASTM A285-78 Gr. C.

Disc..... St. St. 302-2B

SPECIFICATION

A Muffling Orifice Plate to be constructed of materials suitable for the installation and compatible with the piping. Generally, it is to be of steel construction with stainless steel plate welded to the primary plate. The orifices are to be on the stainless steel plate. Orifice plates are to be designed for installation between two ANSI flanges in the enlarged piping downstream of the regulator or noise suppressor. Muffling Orifice Plates are to be designed to provide between 6 to 12 dBA of noise reduction on a high flow PRV.

DIMENSIONS inches(mm)

Size	Rating	Muffling Orifice Plates	
		OD	
		inch	mm
1	125/150	4.25	108
	250/300	2.81	71
	600	2.00	51
1-1/4"	125/150	4.62	117
	250/300	3.00	76
	600	2.50	64
1-1/2"	125/300	5.00	127
	250/300	3.62	92
	600	2.88	73
2	125/150	6.00	152
	250/300	4.19	106
	600	3.62	92
2-1/2"	125/150	7.00	178
	250/300	4.94	125
	600	4.12	105
3"	125/150	7.50	191
	250/300	5.69	145
	600	5.00	127
4"	125/150	9.00	229
	250/300	6.94	176
	600	6.19	157
5"	125/150	10.00	254
	250/300	8.31	211
	600	7.31	186
6"	125/150	11.00	279
	250/300	9.69	246
	600	8.50	216
8"	125/150	13.50	343
	250/300	11.94	303
	600	10.62	270
10"	125/150	16.00	406
	250/300	14.06	357
	600	12.75	324
12"	125/150	19.00	483
	250/300	16.44	418
	600	15.00	381
14"	125/150	21.00	533
	250/300	18.94	481
	600	16.25	413
16"	125/150	23.50	597
	250/300	21.06	535
	600	18.12	460
18"	125/150	25.00	635
	250/300	23.31	592
	600	23.00	584

STEAM PRESSURE REDUCING STATION NOISE REDUCTION

ENVIRONMENT	TYPICAL SOUND PRESSURE LEVEL (DBA)
THRESHOLD OF PAIN	135
THRESHOLD OF DISCOMFORT	120
PNEUMATIC HAMMER	105
NOISY FACTORY	90
NOISY OFFICE	75
NORMAL CONVERSATION	60
PRIVATE OFFICE	45
BROADCAST STUDIO	30
THRESHOLD OF AVG. HEARING	15
THRESHOLD OF ACUTE HEARING	0

INTRODUCTION TO NOISE REDUCTION

WHY IS NOISE IMPORTANT?

Excessive noise is stressful to the human body and constitutes a serious health hazard. The Walsh-Healy Public Contracts Act and the Occupational Safety and Health Act have prompted system designers to pay careful attention to the noise generated by pressure reducing stations.

OSHA has established limits on the length of time any employee may be exposed to various sound levels. These limits are shown in Figure 1 below. For a typical eight hour working day, the limit is 90 dBA. OSHA does not provide sound level limits for periods longer than eight hours. Figure 1 extrapolates the OSHA limits to a full 24 hour day.

When daily exposure is composed of two or more at differing sound levels, their combined effect must be considered. In such cases, the sum of the ratios of actual to permissible exposure times must not exceed unity. that is:

$$\frac{t_1}{T_1} + \frac{t_2}{T_2} = \dots = \frac{t_n}{T_n} \leq 1$$

Where:

T = permissible time at specified noise level
t = actual time at specified noise level
1, 2, ..., n = differing noise levels

FIGURE 1: OSHA MANDATED NOISE EXPOSURE LIMITS*

SOUND PRESSURE LEVEL (DBA)	115	110	105	100	95	90	85	82
PERMISSIBLE EXPOSURE (HOURS PER DAY)	1/4	1/2	1	2	4	8	12	24

* Values for 12 and 24 hour per day exposure are extrapolated.

NOTE: Ear protection must be worn above 90 dBA.

WHAT IS dBA?

Sound results from pressure fluctuations in the air. The sound pressure level which the most sensitive listener can detect is about 20µN/m². This level is normally taken as the reference point for the measurement of sound pressure levels.

Sound pressure level cover an enormous range of values. In order to compress this range, sound levels are usually expressed in decibels. A decibel (dB) is simply the logarithm of the ratio of two quantities. In this case, the two quantities

are the sound pressure level being measured and the reference level. The reference level is, by definition, 0 dB.

The human ear does not respond equally to all frequencies. It tends to be insensitive to very low and very high frequencies. Standard sound level meters are equipped with a scale which approximates the human ear’s response. Sounds measured on this scale are expressed as A-weighted decibels (dBA). The dBA is commonly used in engineering work.

IMPORTANT CHARACTERISTICS OF DECIBELS

ADDING SOUND LEVELS

Since decibels express a logarithmic ratio, they cannot simply be added or subtracted. Figure 2 below provides a means of adding decibels without lengthy calculations.

To add two sound levels:

1. Determine difference between sound level
2. Find correction from Figure 2.
3. Add the correction to the **higher** sound level

DECIBEL DIFFERENCE	0	1	2	3	4	5	6	7	8	9	10
DECIBEL CORRECTION	3.0	2.6	2.1	1.8	1.5	1.2	1.0	0.8	0.6	0.5	0.4

FIGURE 2

SOUND LEVEL REDUCTIONS

Similarly, a 10% reduction in the decibel level does not represent a 10% reduction in absolute sound pressure level. For example, a reduction from 60 dB to 54 dB (a 10% dB reduction) produces a 50% reduction in the

absolute sound pressure level.

A 6 dB reduction always cuts the absolute sound pressure in half. The relationship between decibel and absolute sound pressure level reductions is summarized in Figure 3.

RELATIVE REDUCTION (dB)	1	2	3	4	5	6	10	20	40
ABSOLUTE REDUCTION (%)	11	21	29	37	44	50	68	90	99

FIGURE 3

SOUND LEVELS DECREASE WITH DISTANCE

Sound ratings for reducing valves are conventionally established at a point three feet downstream from the valve's outlet and three feet from the outlet pipe's surface. At further distances from the pipe surface, the radiated sound drops off in intensity. Some typical values are shown below in Figure 4.

The values shown in Figure 4 assume that the valve is acoustically isolated from the surrounding structure. Sound can be transmitted throughout the structure with little attenuation if the piping system is not properly isolated or if surroundings are acoustically "hard". The piping system itself can also act as a conduit for sound.

DISTANCE FROM PIPE	3 Ft.	6 Ft.	12 Ft.	25 Ft.	50 Ft.
SOUND REDUCTION	0 dBA	3 dBA	6 dBA	9 dBA	12 dBA

FIGURE 4

NOISE REDUCTION DESIGN GUIDELINES

1. Size the regulator to provide a maximum inlet velocity of about 10,000 FPM.
2. Determine the regulator outlet velocity. If it would exceed 30,000 FPM, use a Spence Muffling Orifice or a second stage regulator.
3. Expand regulator outlet piping to limit discharge line velocity to about 10,000 FPM.
4. Avoid abrupt changes in pipe size. Limit pipe diameter changes to two pipe sizes per stage of expansion. Do not use eccentric reducers.
5. Directional changes in downstream piping should be made only after the line size has been increased. Use long radius fittings; avoid bullhead tee connections.
6. Provide as much straight run of pipe on both sides of the regulator as possible:
 - a. 10 pipe diameters minimum to the inlet.
 - b. 20 pipe diameters minimum of expanded line size from the outlet.
7. Size all piping components, including strainer and stop valves for a maximum flow velocity of about 10,000 FPM (Exception: An outlet stop valve mounted at the regulator outlet should be equal in size to the regulator.) In areas where low sound levels are specified, reduce this limit by 25% to 50%.
8. To limit noise transmission through the building's structure, keep the regulator and piping at least 3 feet away from solid surfaces. Use sound isolating piping supports.
9. Apply high density insulation to regulator body, piping and system components. Insulation reduces heat loss significantly and can provide moderate (3-6 dB) local noise attenuation. For greater noise reduction, use removable Spence Insulcap Jacket with lead lining on regulator body.
10. Use a Spence Noise Suppressor to reduce the propagation of noise via the downstream piping

SELECTING NOISE REDUCING DEVICES

SOURCE TREATMENT

A Spence Muffling Orifice will reduce high flow pressure regulator noise by 6 to 10 dBA. Installed in the expanded

downstream piping, the Muffling Orifice reduces the generation of noise at its source

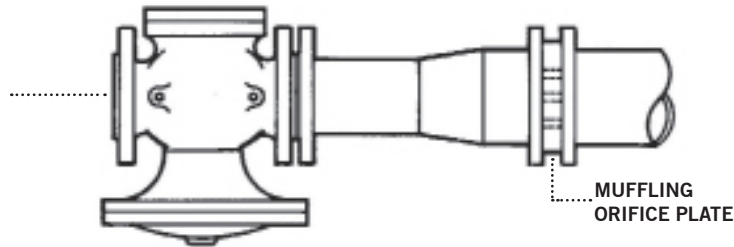


FIGURE 5A: SINGLE STAGE INSTALLATION WITH MUFFLING ORIFICE

PATH TREATMENT

A Spence Noise Suppressor will reduce pipeline carried noise by 10 to 20 dBA. Installed at the regulator outlet,

the Suppressor absorbs noise generated by the pressure regulator and limits its propagation through the piping system.

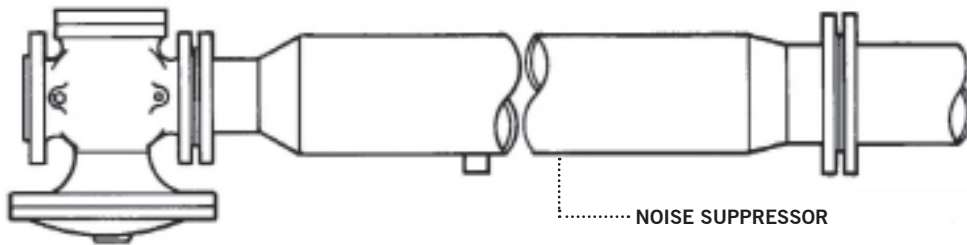


FIGURE 5B: SINGLE STAGE INSTALLATION WITH NOISE SUPPRESSOR

SOURCE AND PATH TREATMENT

For maximum reduction of pipeline transmitted noise, the combined installation of a Spence Muffling Orifice and Spence Noise Suppressor will reduce the sound pressure

level by 15 to 30 dBA. Installation of a Spence Insulcap Jacket with lead lining on the regulator body will further reduce sound pressure levels.

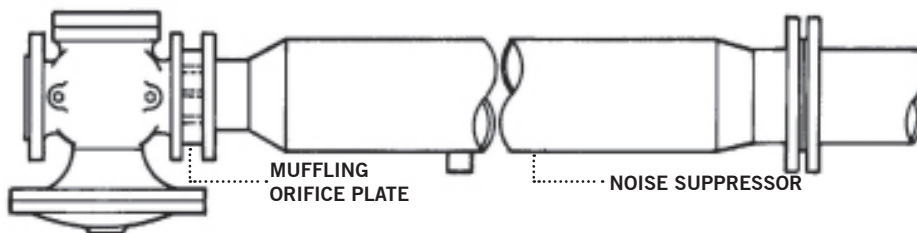


FIGURE 5C: SINGLE STAGE INSTALLATION WITH MUFFLING ORIFICE AND NOISE SUPPRESSOR

SIZING NOISE REDUCTION COMPONENTS

SELECTION OF SIZE AND TYPE OF COMPONENTS

REGULATOR SIZE

1. Enter Saturated Steam Flow Table (opposite) at the specified **initial pressure**. Read across the first tabulated value which includes the specified steam flow. The regulator size at the head of this column is the minimum required to limit inlet velocity to 10,000 FPM.
2. Move up this column to the specified **reduced pressure** (chosen outlet pressure, if Muffling Orifice is used) and note the tabulated flow value. If the specified flow is more than three times the tabulated flow, the regulator's exit velocity will exceed 30,000 FPM. (Use a Spence Muffling orifice or a second stage reduction.)

DELIVERY PIPE SIZE

Enter Saturated Steam Flow Table (opposite) at the specified reduced pressure. Read across to the first tabulated value which includes the specified steam flow. The pipe size at the head of this column is the minimum expanded pipe size to limit velocity to 10,000 FPM.

MUFFLING ORIFICE SIZE

If a Noise Suppressor is installed, the Muffling Orifice size is the same as the regulator size. Otherwise, it is the same as the delivery pipe size.

NOISE SUPPRESSOR SIZE

The inlet size of the Noise Suppressor is the same as the regulator size. The outlet size is the same as the delivery pipe size.

EXAMPLE

SPECIFIED CONDITIONS

Saturated Steam Flow	= 5,000 lb/hr
Initial Pressure	= 100 PSIG
Reduced Pressure	= 15 PSIG

REGULATOR SIZE

Entering Saturated Steam Flow Table (opposite) at 100 psig, the first tabulated value which includes 5,000 lb/hr is 5141 lb/hr. The head of this column indicates a 2^{1/2}" regulator is required to limit inlet velocity to 10,000 FPM.

Moving up this column to 15 psig, the tabulated flow is 1452 lb/hr. Specified flow is 3.47 times the tabulated flow. The exit velocity for a 2^{1/2}" regulator will be 34,700 FPM. The use of a Muffling Orifice is indicated.

DELIVERY PIPE SIZE

Entering Saturated Steam Flow Table (opposite) at 15 psig, the first tabulated value which includes 5000 lb/hr is 6030 lb/hr. The delivery pipe size at the head of this column is 5". For this pipe size, flow velocity will be 8,290 FPM.

ANSWER: 2 1/2" SPENCE REGULATOR WITH MUFFLING ORIFICE, NOISE SUPPRESSOR AND 5" DELIVERY PIPE.

NOTE: Regulators should always be protected by properly designed Strainers.

CALCULATING VELOCITY

VELOCITY FORMULA

The Saturated Steam Flow Tables (opposite) provide a convenient means of calculating flow velocity. The flows tabulated are based on 10,000 feet per minute (FPM) velocity. The velocities at other steam flows can be obtained by simple proportioning:

$$\text{Actual Velocity} = \frac{\text{Actual Flow}}{\text{Tabulated Flow}} \times 10,000 \text{ FPM}$$

Example

Pipe size	=	5"
Pressure	=	15 psig
Tabulated flow	=	6,030 lb/hr
Actual flow	=	5,000 lb/hr

$$\text{Actual Velocity} = \frac{5,000}{6,030} \times 10,000 \text{ FPM} = 8,290 \text{ FPM}$$

SATURATED STEAM FLOW TABLE

(LB/HR) AT 10,000 FPM

BASED ON SCHEDULE 40 PIPE

SIZES 3/8" THROUGH 4"

PRESS. (PSIG)	TEMP (°F)	REGULATOR or PIPE SIZE (inches)									
		3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
-10	160	10	15	27	43	75	102	168	239	370	637
-5	192	21	33	58	94	162	221	364	519	802	1381
0	212	30	47	83	134	233	317	522	744	1149	1979
5	228	40	63	111	179	310	422	696	993	1533	2641
10	240	49	78	136	221	382	520	858	1224	1890	3254
15	250	58	92	162	262	454	617	1018	1452	2242	3860
20	259	67	106	187	303	524	713	1176	1678	2591	4461
25	267	76	121	212	343	594	809	1333	1902	2936	5057
30	274	85	135	237	383	664	903	1489	2124	3280	5649
40	287	102	163	286	463	801	1090	1797	2564	3959	6818
50	298	120	190	334	542	937	1276	2103	3000	4632	7976
60	308	137	218	382	620	1073	1460	2406	3434	5302	9130
70	316	154	245	430	697	1205	1641	2704	3859	5958	10260
80	324	171	272	478	774	1340	1824	3007	4290	6624	11407
90	331	188	299	525	851	1473	2005	3305	4716	7282	12540
100	338	205	326	573	928	1606	2186	3604	5141	7939	13671
125	353	247	394	691	1119	1937	2637	4346	6201	9575	16488
150	366	289	460	808	1309	2266	3085	5084	7254	11201	19288
175	378	331	528	926	1500	2597	3534	5826	8312	12834	22101
200	388	373	594	1043	1691	2926	3982	6564	9366	14461	24903
250	406	457	728	1277	2070	3582	4875	8035	11465	17703	30484
300	422	545	867	1522	2466	4269	5810	9576	13664	21098	36331
400	448	710	1130	1984	3215	5564	7574	12484	17812	27502	47360
500	470	884	1407	2469	4001	6925	9425	15535	22166	34225	58936
600	489	1061	1688	2963	4801	8310	11310	18642	26599	41070	70724

SIZES 5" THROUGH 24"

PRESS. (PSIG)	TEMP (°F)	REGULATOR or PIPE SIZE (inches)									
		5	6	8	10	12	14	16	18	20	24
-10	160	1001	1445	2502	3944	5599	6767	8839	11189	13903	20108
-5	192	2170	3133	5425	8552	12139	14671	19165	24258	30143	43597
0	212	3110	4492	7778	12260	17403	21033	27475	34778	43215	62503
5	228	4150	5993	10377	16357	23218	28061	36656	46398	57655	83388
10	240	5114	7385	12787	20156	28611	34578	45170	57175	71045	102755
15	250	6067	8761	15171	23913	33943	41023	53589	67831	84287	121908
20	259	7011	10124	17531	27633	39225	47406	61927	78386	97402	140876
25	267	7946	11475	19871	31321	44460	53732	70192	88847	110401	159677
30	274	8877	12820	22199	34990	49668	60027	78414	99255	123334	178382
40	287	10714	15473	26793	42231	59946	72449	94641	119795	148857	215297
50	298	12535	18102	31345	49407	70133	84760	110723	140151	174151	251881
60	308	14347	20719	35877	56551	80272	97014	126732	160414	199330	288298
70	316	16123	23284	40318	63551	90209	109024	142420	180272	224005	323986
80	324	17926	25887	44827	70658	100297	121215	158346	200431	249055	360217
90	331	19706	28458	49278	77674	110256	133251	174069	220332	273784	395983
100	338	21484	31025	53723	84680	120202	145271	189771	240207	298481	431704
125	353	25912	37419	64795	102132	144974	175210	228881	289712	359996	520675
150	366	30312	43773	75798	119476	169593	204964	267749	338910	421130	609095
175	378	34732	50157	86852	136900	194326	234855	306796	388335	482544	697921
200	388	39135	56515	97862	154253	218959	264625	345686	437560	543712	786390
250	406	47907	69182	119796	188827	268036	323938	423167	535634	665579	962649
300	422	57094	82449	142771	225041	319440	386063	504322	638359	793224	1147267
400	448	74426	107479	186112	293357	416413	503261	657420	832146	1034024	1495545
500	470	92620	133751	231607	365066	518202	626280	818123	1035560	1286785	1861122
600	489	111143	160501	277928	438079	621843	751536	981748	1242672	1544142	2233347

NOISE REDUCTION COMPONENT FLOW COEFFICIENTS

1. Enter Cv Table below at the component's (regulator or orifice) **inlet pressure**. Read the tabulated value for **W/C_v** at the component's **outlet pressure**.
2. Divide the specified steam flow by the tabulated W/Cv to obtain the regulator (OVA) or orifice (Cvo) required flow coefficient.

Note that the lowest outlet pressure listed for each inlet pressure corresponds to a critical pressure drop. An outlet pressure lower than this will not provide any further increase in flow.

Refer to Rated Steam Capacity Tables earlier in this Section for rated capacities and minimum pressure drops for Spence Regulators. The definition of component **inlet** and **outlet pressures** is below.

FLOW FOR C_v = 1 TABLE
(W/C_v - LB/HR)

INLET PRESSURE (PSIG)	OUTLET PRESSURE (PSIG)	W/C _v	INLET PRESSURE (PSIG)	OUTLET PRESSURE (PSIG)	W/C _v	INLET PRESSURE (PSIG)	OUTLET PRESSURE (PSIG)	W/C _v	INLET PRESSURE (PSIG)	OUTLET PRESSURE (PSIG)	W/C _v
600	550	510	300	275	258	100	90	98.4	40	35	48.0
	500	706		250	357		80	136		33	56.2
	450	845		225	428		70	162		30	66.2
	400	953		200	483		60	183		25	79.0
	350	1040		175	527		55	191		20	88.8
	342	1050		168	538		52	196		17	93.6
550	500	488	250	225	236	90	80	93.8	30	25	43.1
	450	674		200	325		75	113		24	47.0
	400	805		175	388		70	129		22	53.6
	350	905		150	435		60	154		20	59.2
	325	947		145	433		50	173		15	70.2
500	313	966	200	139	453	80	46	179	25	11	76.5
	450	465		190	136		70	88.9		20	40.5
	400	640		175	211		60	122		19	44.1
	350	763		150	289		55	135		18	47.3
	325	812		125	342		50	145		15	55.3
	300	855		115	359		45	154		10	65.3
450	284	881	175	110	367	70	40	162	20	8.3	67.9
	400	440		165	128		60	83.8		15	37.7
	350	605		150	198		55	101		14	41.0
	325	666		125	270		50	115		13	43.9
	300	718		115	291		45	126		12	46.5
	275	763		100	317		40	136		10	51.2
400	255	795	150	95	325	60	34	145	15	5.4	59.4
	350	415		140	119		50	78.4		10	34.6
	325	500		125	183		45	94.3		9	37.6
	300	567		100	248		40	107		8	40.2
	275	623		90	267		35	117		7	42.6
	250	670		85	275		30	126		5	46.7
350	226	709	125	81	282	50	29	128	10	2.5	50.8
	300	387		115	109		45	52.4		5	31.3
	275	465		100	168		40	72.6		4	33.9
	250	527		90	194		35	87.0		3	36.2
	225	577		80	216		30	98.2		2	38.2
	200	619		75	225		25	107		0	41.7
	197	624		66	239		23	111		-0.4	42.3

DEFINITION OF COMPONENT PRESSURE

COMPONENT	REGULATOR ONLY		REGULATOR PLUS ORIFICE	
	INLET PRESSURE	OUTLET PRESSURE	INLET PRESSURE	OUTLET PRESSURE
REGULATOR	Initial Pressure	Reduced Pressure	Initial Pressure	+
ORIFICE	N/A	N/A	+	Reduced Pressure

+ Chosen regulator outlet/orifice inlet pressure. A rule of thumb is to choose this pressure so that regulator flow is barely subcritical.

SOUND PRESSURE LEVEL (SPL) CALCULATIONS

REGULATOR SOUND PRESSURE LEVEL

REGULATOR SIZE

1. Enter Regulator Sound Pressure Level Chart L_1 of SPLR at top of following page at the specified **initial pressure**. Move vertically to the specified **reduced pressure** (chosen outlet pressure, if Muffling Orifice is used). Read L_1 to the left of this intersection.
2. Enter Regulator Sound Pressure Level Chart L_2 of SPLR at bottom of following page at the required **regulator flow coefficient** (CV_R). Move vertically to the delivery pipe size. Read L_2 to the left of this intersection.
3. Regulator sound pressure level is:

$$SPLR = L_1 + L_2$$
 NOTE: If SPLR exceeds specified limits, use a Muffling Orifice to reduce the regulator's pressure drop.

MUFFLING ORIFICE SOUND PRESSURE LEVEL

REGULATOR SIZE

1. Enter Muffling Orifice Sound Pressure Level Chart L_3 of SPLO at top of following page at the chosen **orifice inlet** (regulator outlet) pressure. Move vertically to the specified **reduced pressure**. Read L_3 to the left of this intersection.
2. Enter Muffling Orifice Sound Pressure Level Chart L_4 of SPLO at bottom of following page at the required **orifice flow coefficient** (CV_0). Move vertically to the orifice plate size. Read L_4 to the left of this intersection.
3. Regulator sound pressure level is:

$$SPLO = L_3 + L_4$$

COMBINED SOUND PRESSURE LEVEL

Combine **SPLO** and **SPLR** as follows:

1. Determine difference between **SPLO** and **SPLR**.
2. Find correction from dB Correction Table at right.
3. Add the correction to the **higher SPL**.

EXAMPLE

SPECIFIED CONDITIONS

Saturated Steam Flow	= 5,000 lb/hr
Initial Pressure	= 100 PSIG
Reduced Pressure	= 15 PSIG

From the component sizing example on preceding pages, a 2 1/2" regulator with a 5" Muffling Orifice is required. Choose an orifice inlet (regulator outlet) pressure of 55 PSIG (critical pressure is 52 PSIG).

Entering Flow for $Cv=1$ Table on facing page at 100 PSIG, $W/Cv = 191$ at 55 PSIG outlet pressure. Thus $CVR = (5,000 \div 191) = 26.2$.

Flow for $Cv=1$ Table does not provide a listing for 55 PSIG inlet pressure. Using the critical pressures at both 60 PSIG and 50 PSIG, we estimate that $W/Cv = (128 + 111) - 2 = 120$; thus $CV0 = (5,000 \div 120) = 41.7$.


Entering L_1 of SPLR Chart on following page at 100 PSIG, $L_1 = 41$ at 55 PSIG outlet pressure. Entering L_2 of SPLR Chart at $CVR = 26.2$, $L_2 = 37$ at 5" pipe size. Thus $SPLR = L_1 + L_2 = 78$ dBA.

Entering L_3 of SPLO Chart on following page at 55 PSIG, $L_3 = 52$ at 15 PSIG reduced pressure. Entering L_4 of SPLO Chart at $CV0 = 41.7$, $L_4 = 16$ at 5" plate size. Thus $SPLO = L_3 + L_4 = 68$ dBA.


$SPLR - SPLO = 10$ dBA. From the dB Correction Table below, the decibel correction is 0.4 dB. Thus the combined $SPL = SPLR + 0.4 = 78.4$ dBA.

REGULATOR SOUND PRESSURE LEVEL CHARTS



L₁ OF SPLR CHART

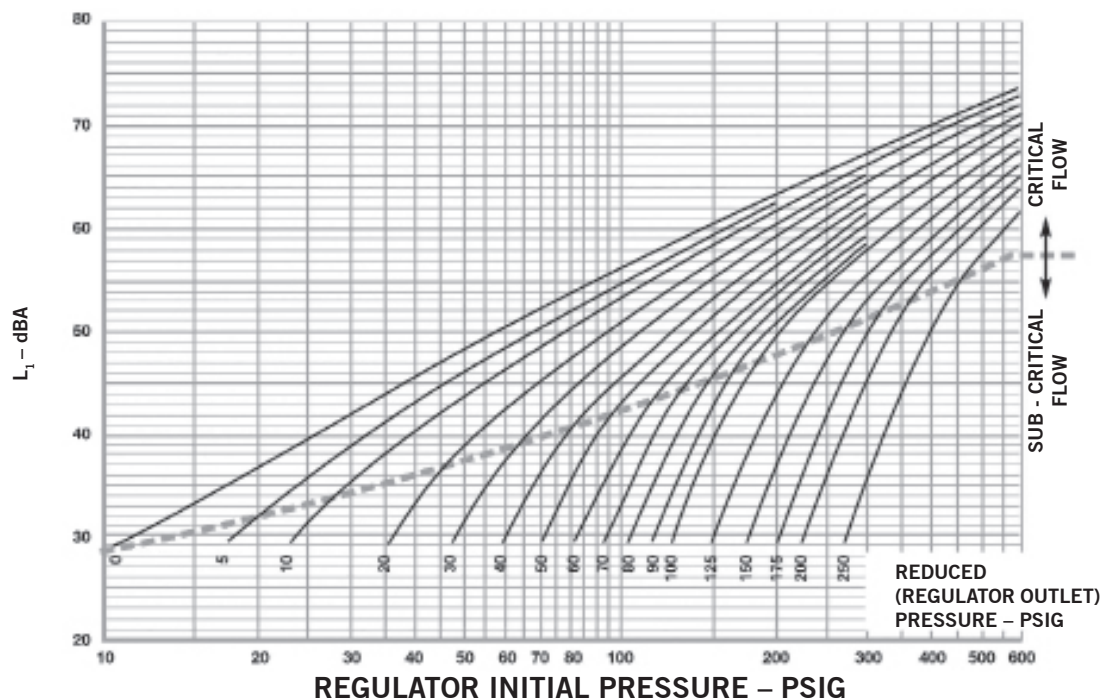

L₂ OF SPLR CHART

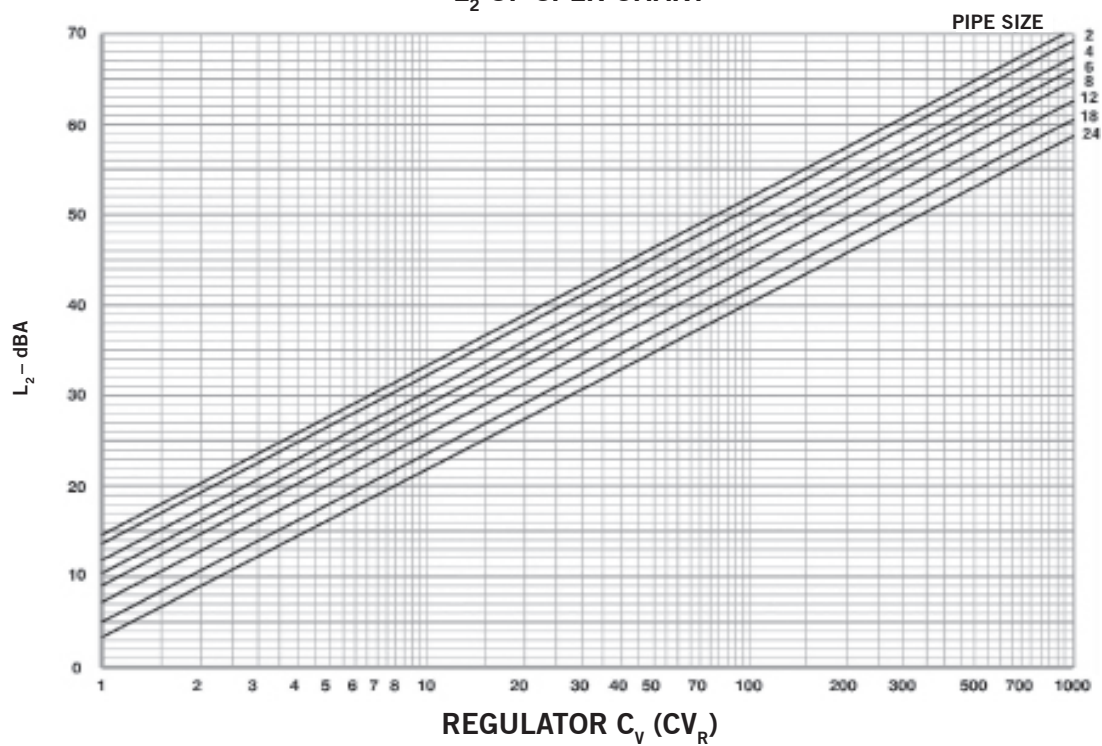

MUFFLING ORIFICE SOUND PRESSURE LEVEL CHARTS

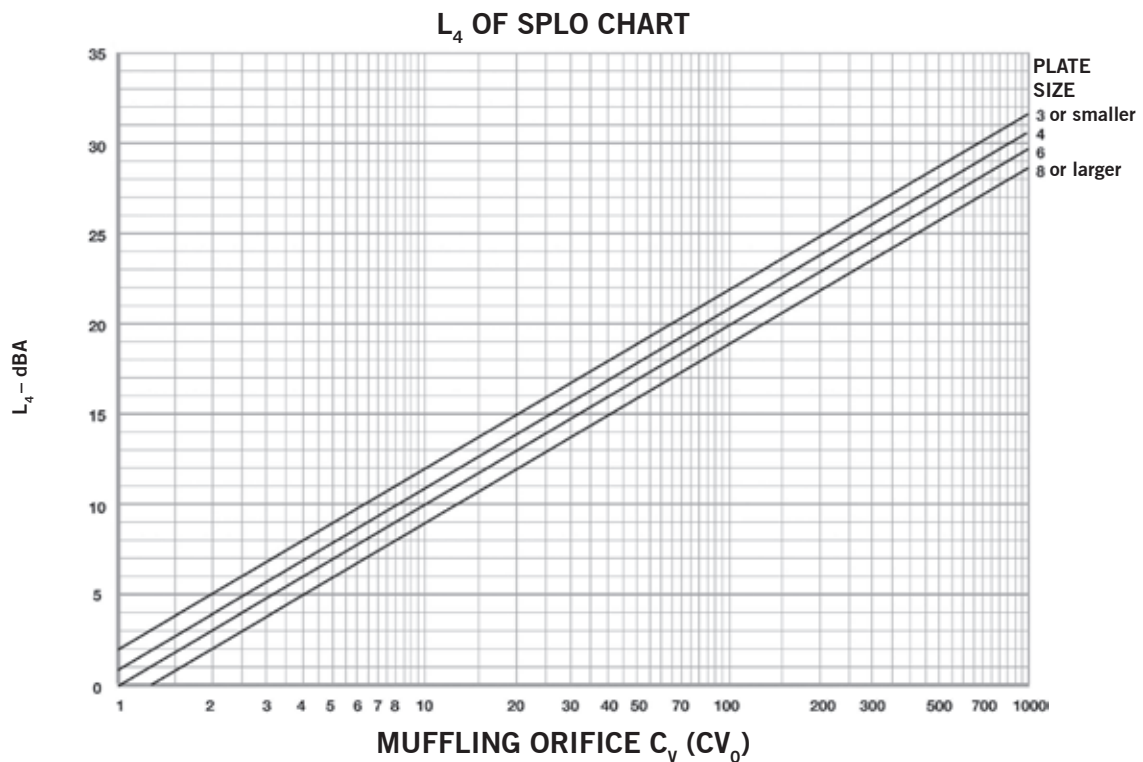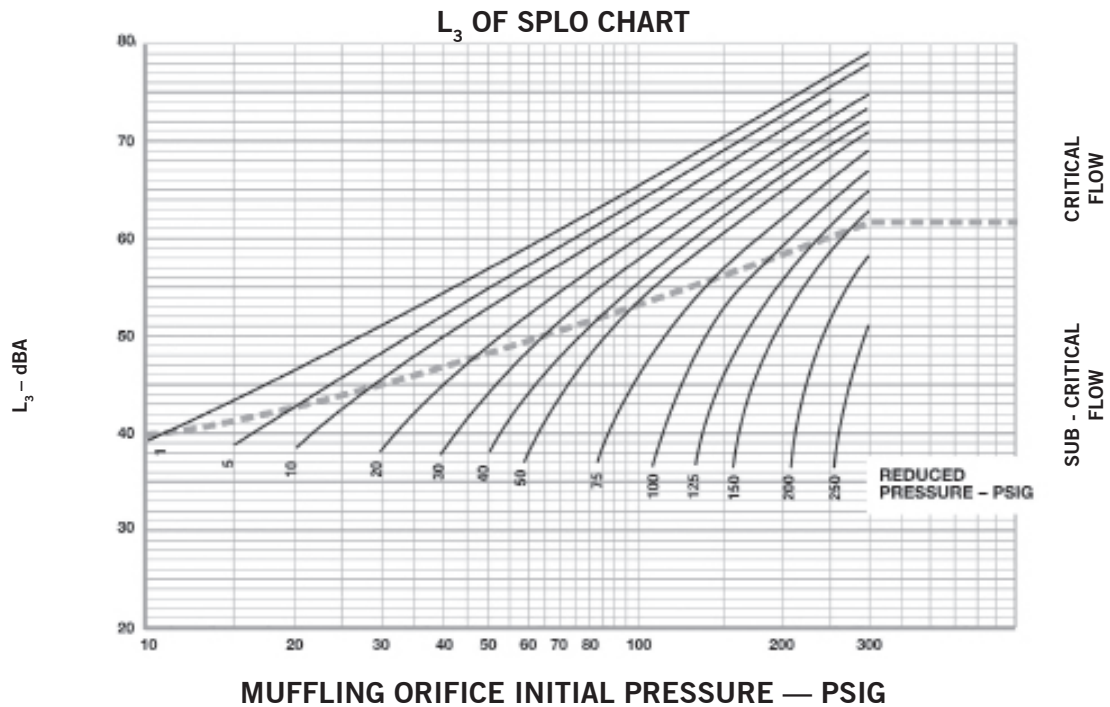

SECTION IV

APPLICATION GUIDE


TYPE ED SINGLE STAGE PRESSURE REDUCING VALVE

APPLICATION:

To reduce a steady or varying Inlet pressure to a constant adjustable delivery pressure.

OPERATION:

Valve is operated by incoming pressure. As delivery pressure nears spring setting on pilot, valve starts to modulate and maintain set pressure.

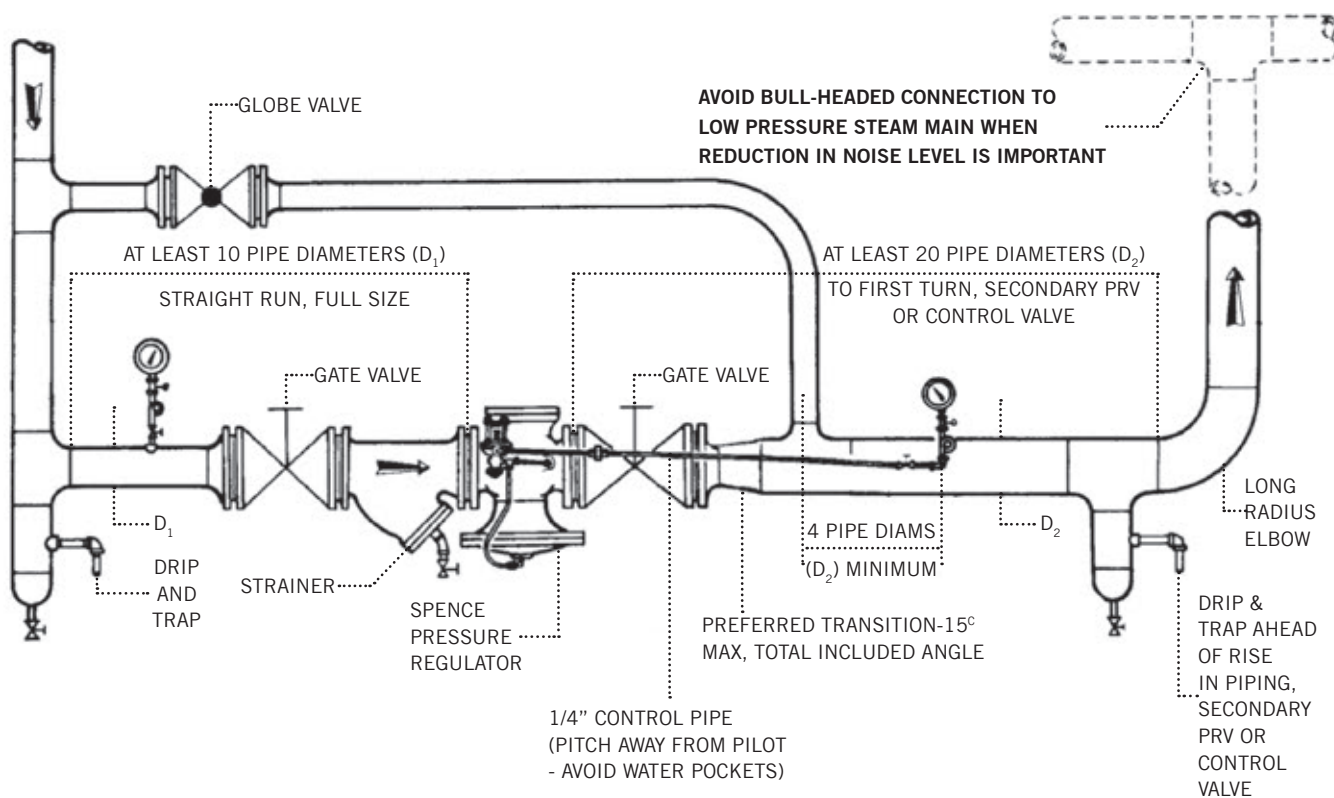

RECOMMENDED INSTALLATION OF REGULATOR WITH STRAINER

ADVANTAGES:

- Accurate, sensitive control.
- Packless construction.
- High capacity.
- Inexpensive.


TYPE ED PARALLEL (ADDITIVE) PRESSURE REDUCING STATION

APPLICATION:

Used on widely varying flow conditions

OPERATION:

Load is typically split 1/3 - 2/3. Small valve is sized for 1/3 of load and is lead valve set for desired delivery pressure. Large valve is lag valve set 2 - 3 psig lower than delivery pressure of small valve. On low flow demand, small valve only will be flowing; as flow increases and small valve cannot handle flow, the delivery pressure drops and large valve opens

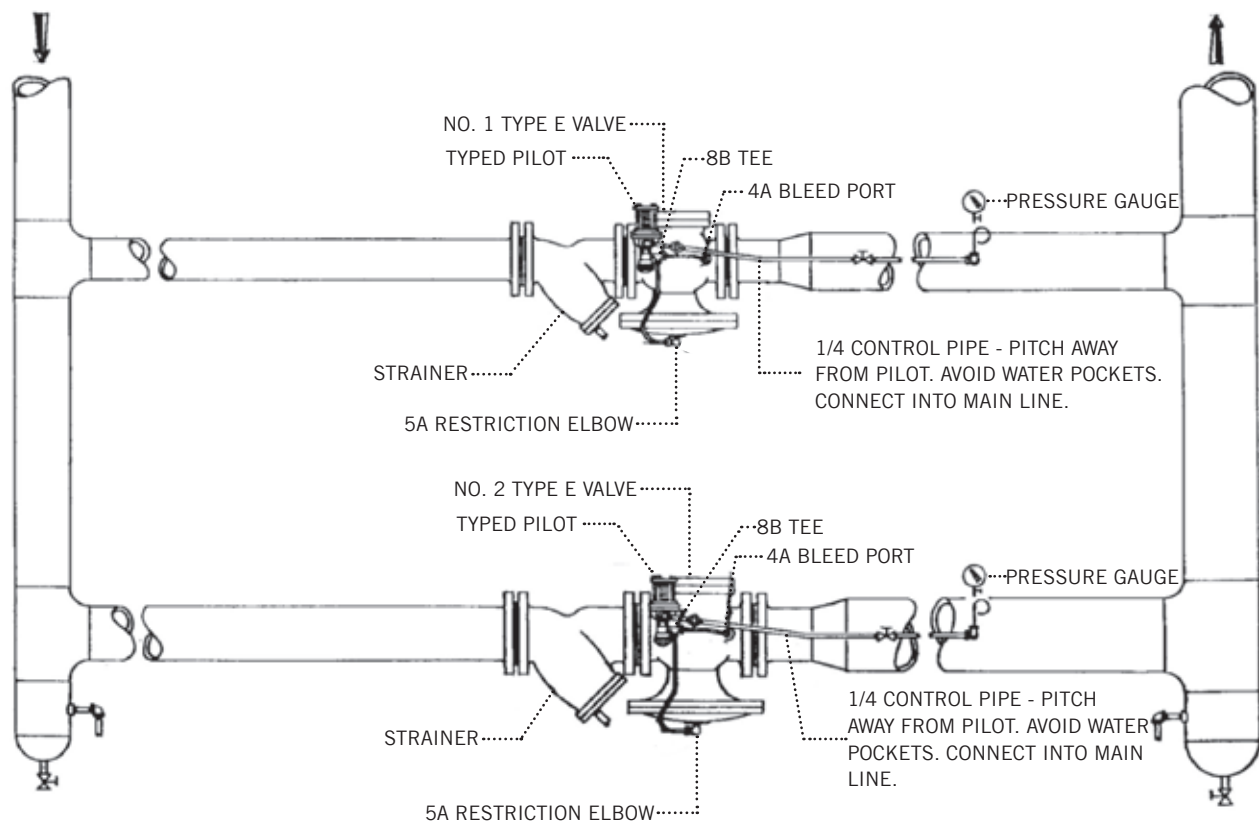

NOTE: PILOT FOR PRV NO.1 TO BE SET HIGHER THAN PILOT FOR PRV NO. 2

ADVANTAGES:

Better rangeability.
Accurate control.


TYPE ED TWO-STAGE PRESSURE REDUCING STATION

APPLICATION:

Used when reducing from high inlet pressure to low delivery pressure.

OPERATION:

Same as single stage reduction. When delivery pressure approaches spring setting on pilot, main valve throttles to maintain setting.

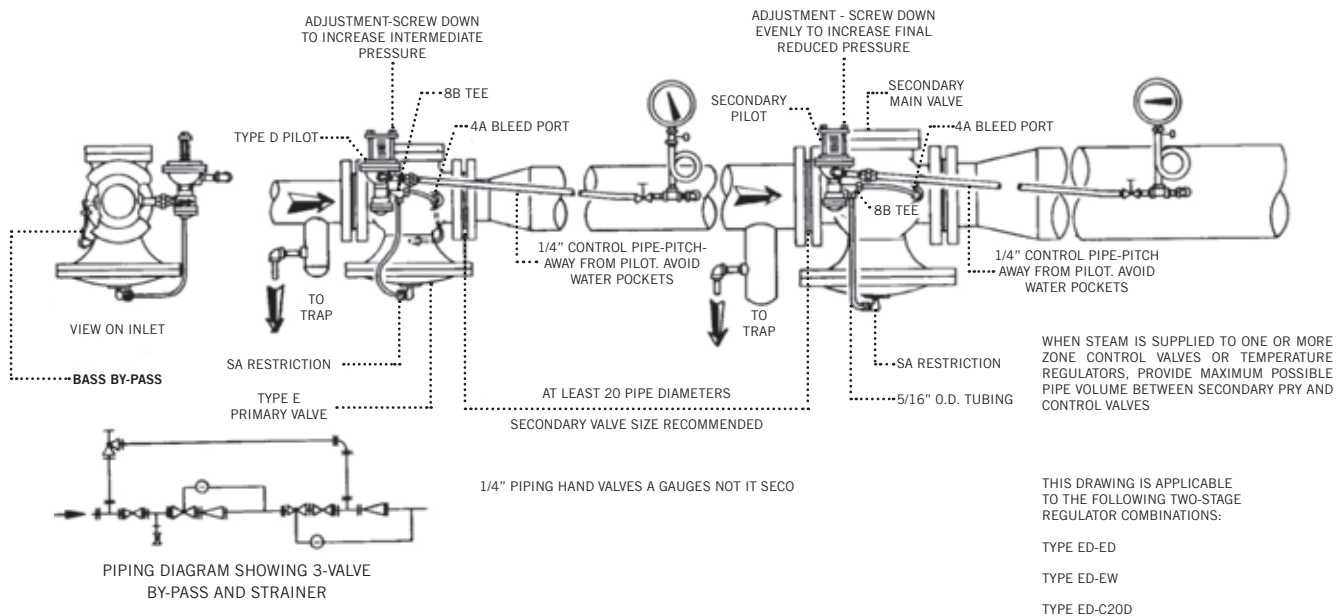

ADVANTAGES:

Less velocity noise.
Less maintenance costs.
Safety is increased.


TYPE ED TURBINE EXHAUST MAKE-UP VALVE

APPLICATION:

To provide additional (make-up) steam to turbine exhaust main.

OPERATION:

When turbine load decreases and turbine exhaust is insufficient for steam load, very slight drop in exhaust pressure causes pressure regulator to feed correct amount of steam to meet demand.

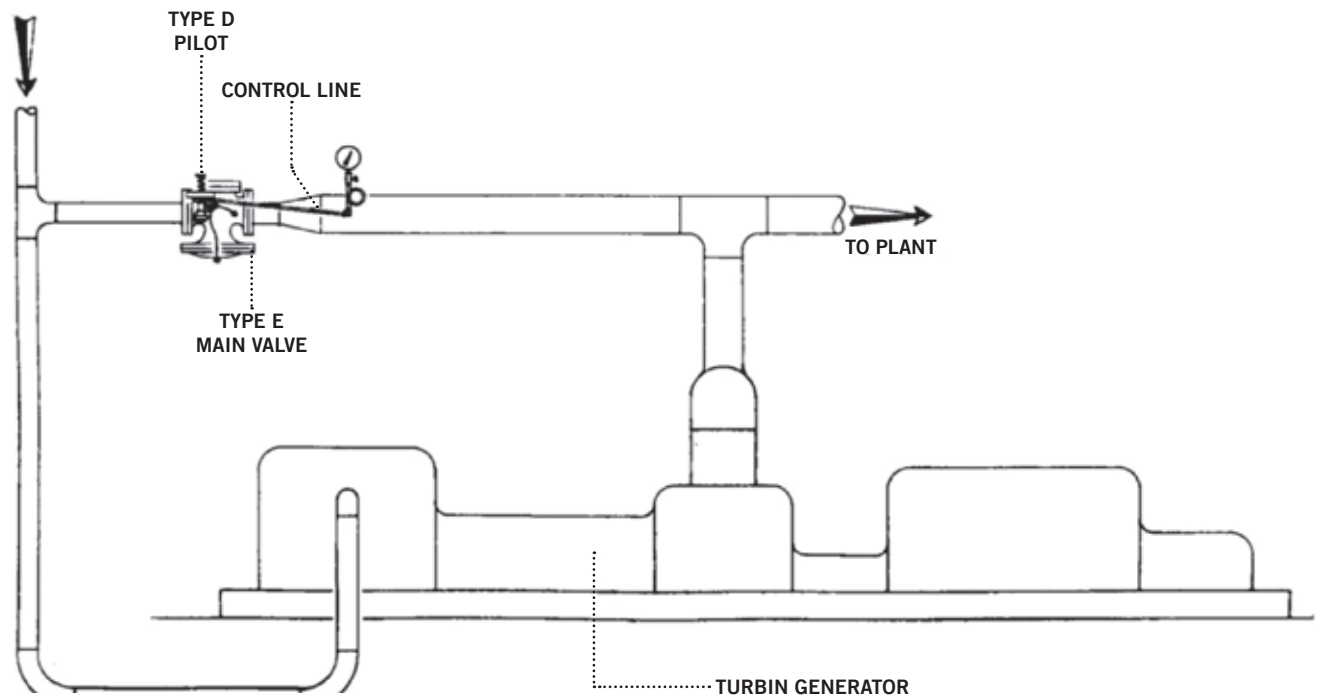

ADVANTAGES:

Pilot operated accuracy avoids undue pressure drop before makeup starts.

Constant accurate supply to user.

Ease of operation - "set & forget".


TYPE EF14 AND EF14D STEAM ALLOCATING VALVES

APPLICATION:

To provide for distribution of steam an occasionally overloaded boiler to most essential services first.

OPERATION:

With boiler operating within rated load and at rated pressure, F14 pilots (set slightly lower) are wide open and main valves are either wide open or under control of alternate pilots and delivering all the steam each line requires. Then, when load increases beyond boiler capacity and boiler pressure drops, the F14 pilots will throttle the main valves, restricting the flow to less vital processes and permitting the others to function at rating.

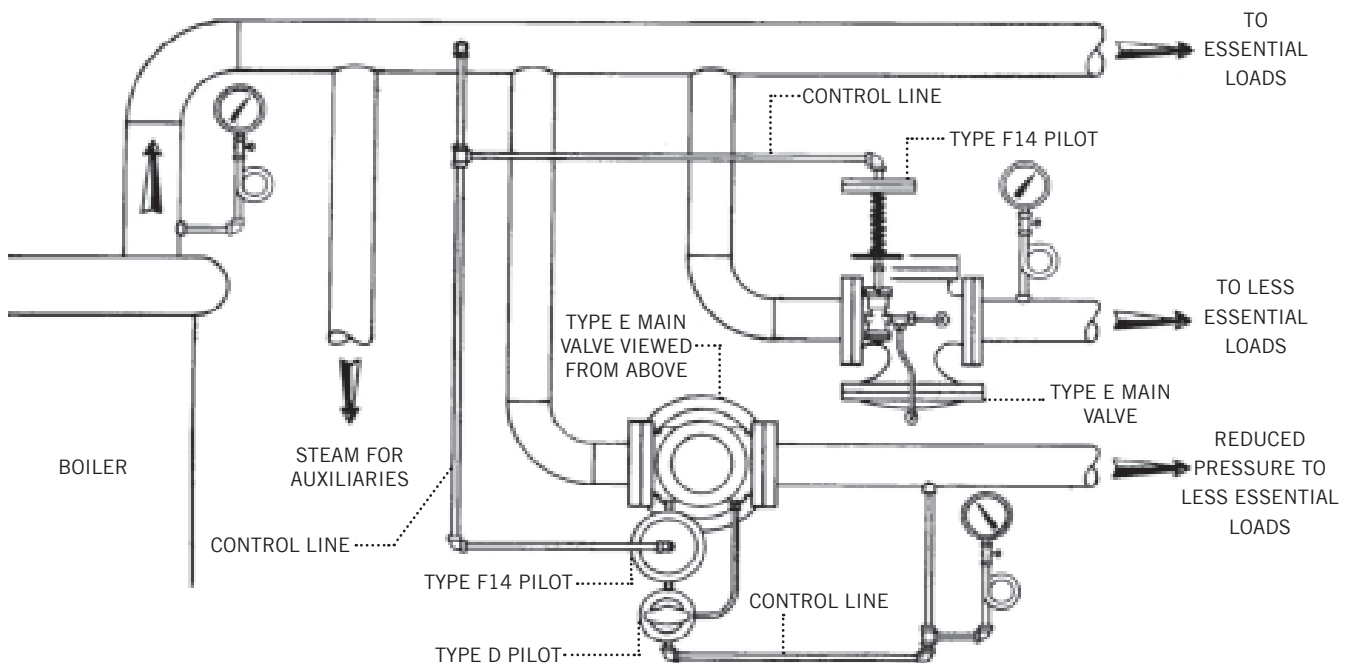

ADVANTAGES:

- Less expensive than separate back pressure valve (when combined with pressure, temperature or other regulating valves).
- Can frequently postpone necessity of buying larger boiler.
- Provides assurance against loss of steam to boiler auxiliaries.


TYPE ED REMOTE SHUT OFF

APPLICATION:

Provides easy shut-down on a process where frequent shut-down is required.

OPERATION:

Same as standard ED, except, closing 1/4" gate valve denies steam to the pilot and shuts main valve.

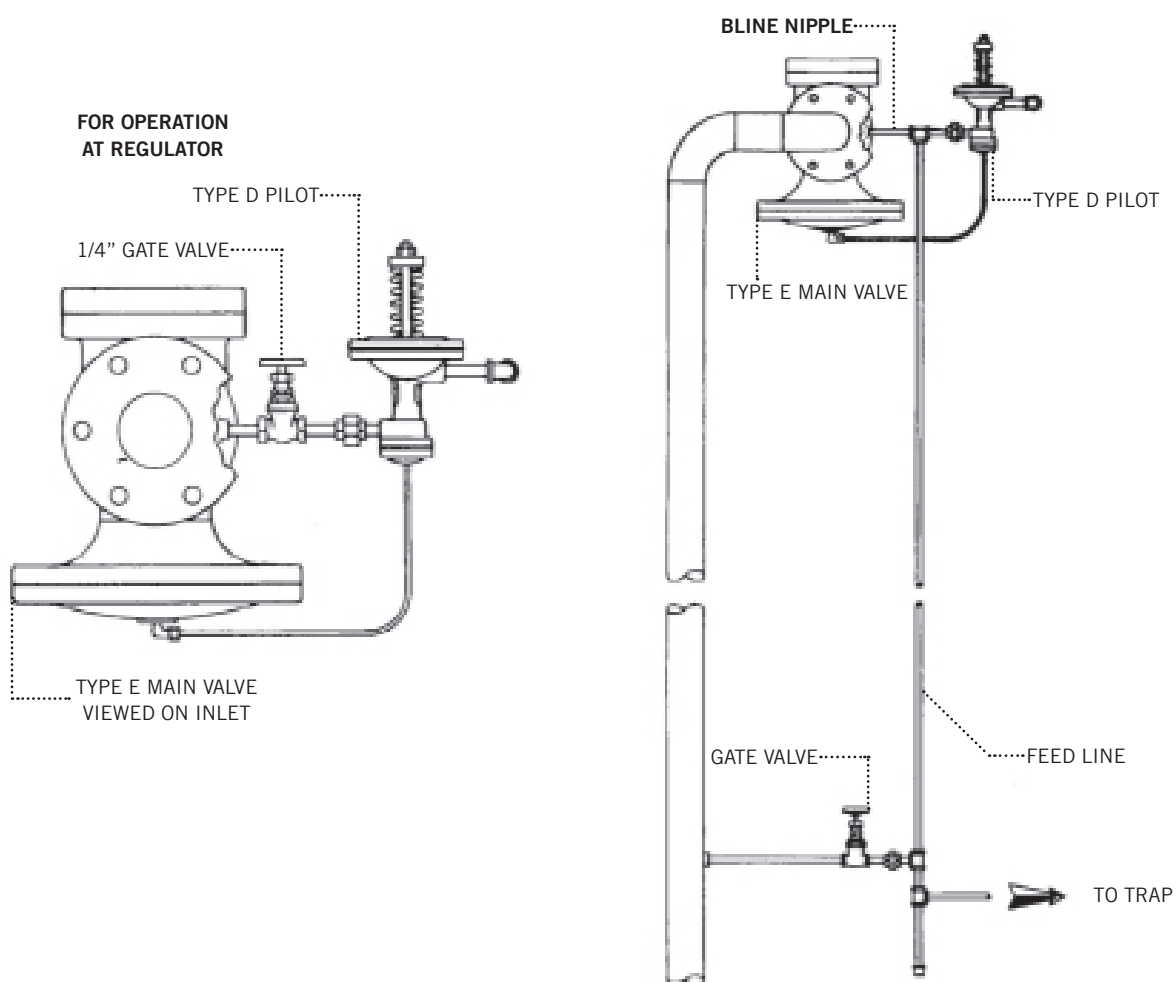

ADVANTAGES:

Easier and much faster than opening and closing the larger gate valve in main.

Reduces maintenance on the gate valve in the main line.

Self contained.


TYPE ED REMOTE MOUNTED PILOT

APPLICATION:

Provides remote location of pilot to area where pressure can be easily adjusted.

OPERATION:

Standard ED operation.

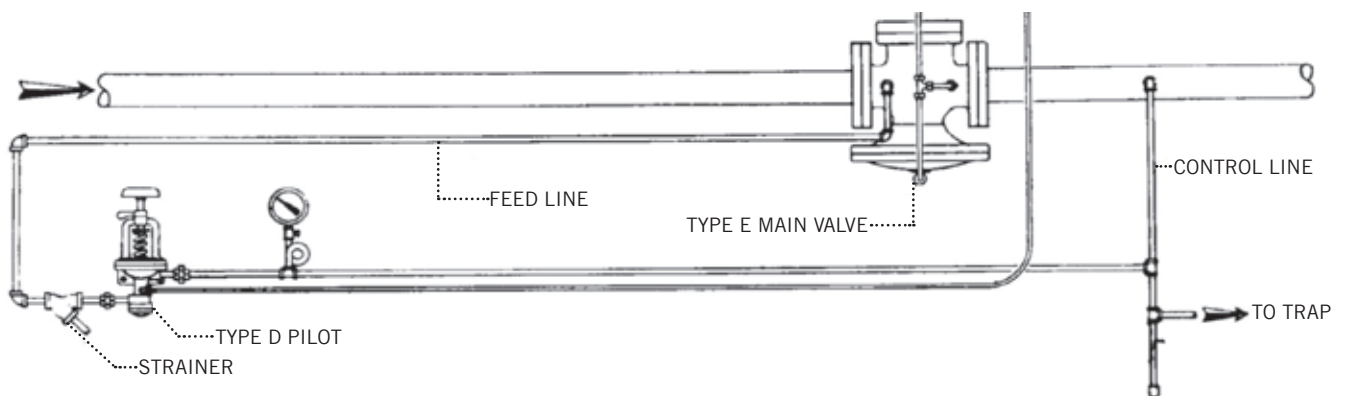

ADVANTAGES:

Least expensive of remote-adjusting arrangements (less than special extra equipment or re-routing main piping).

Maintenance personnel, who understand operation of standard mounted regulator, have nothing new to learn.

Can be applied to existing regulators by merely extending connections.

Can be furnished with panel board and gages.

TYPE EP125 TRIP VALVE

APPLICATION:


In some district heating and steam distribution systems, the use of relief valves and vent piping may not be feasible, because of building height. Where such a condition exists, and the system steam pressure does not exceed 400 psi, ANSI B31.1-1977, Paragraph 102.2.5 permits the use of a pressure reducing valve and a trip stop valve in series to provide over-pressure protection.

The P125 trip pilot is a self-operated device intended to be used in conjunction with a normally-closed Spence main valve, as cited in previous paragraph.

OPERATION:

During normal operation, the P125 pilot holds its main valve in the open position. Reduced pressure is under control of primary P.R.V

If reduced pressure rises to the set point of P125 (generally 5 psig over controlled pressure) it will shut and lock closed. This action closes its main valve and shuts system off.

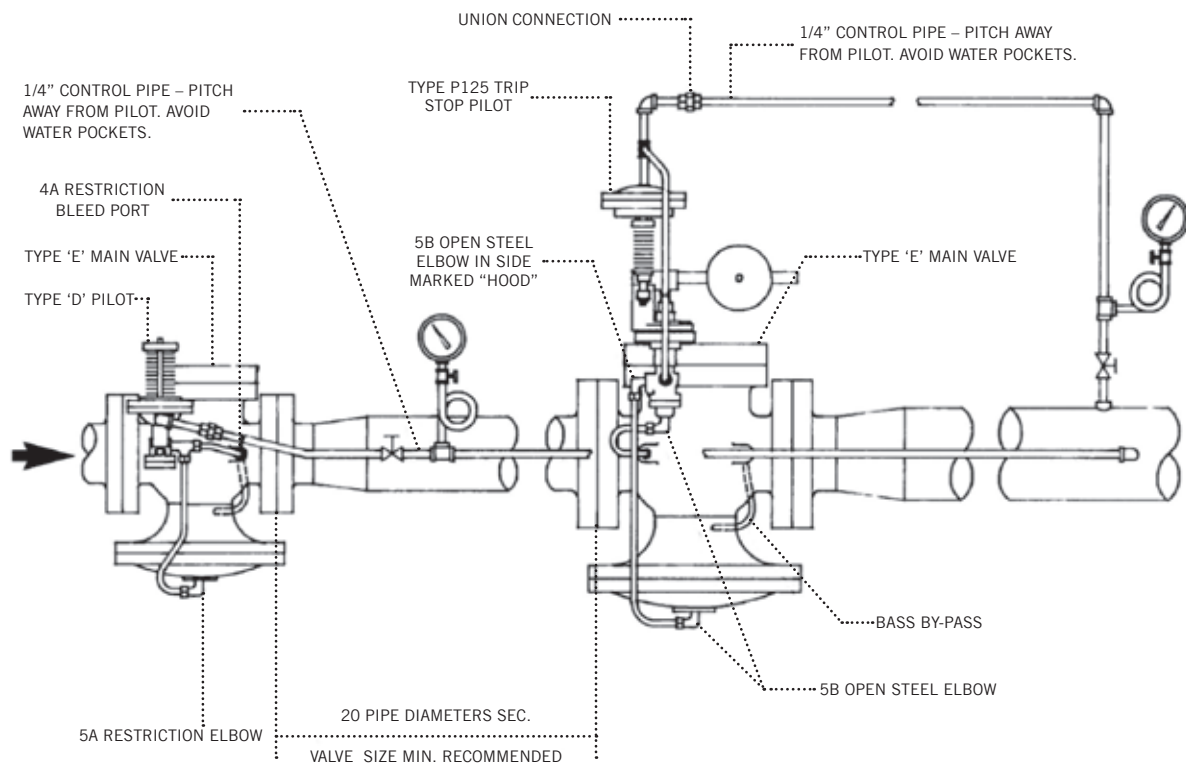

ADVANTAGES:

Trip valve has to be manually rest.

Less expensive than relief valve.

Control accuracy of ED.


TYPE D50 DIRECT OPERATED PRESSURE REDUCING VALVE

APPLICATION:

To reduce a steady or varying inlet pressure to a constant adjustable delivery pressure. Ideal for small flows such as unit heaters and sterilizers.

OPERATION:

Valve is operated by incoming pressure. As delivery pressure nears spring setting on pilot, valve starts to modulate and maintain set pressure.

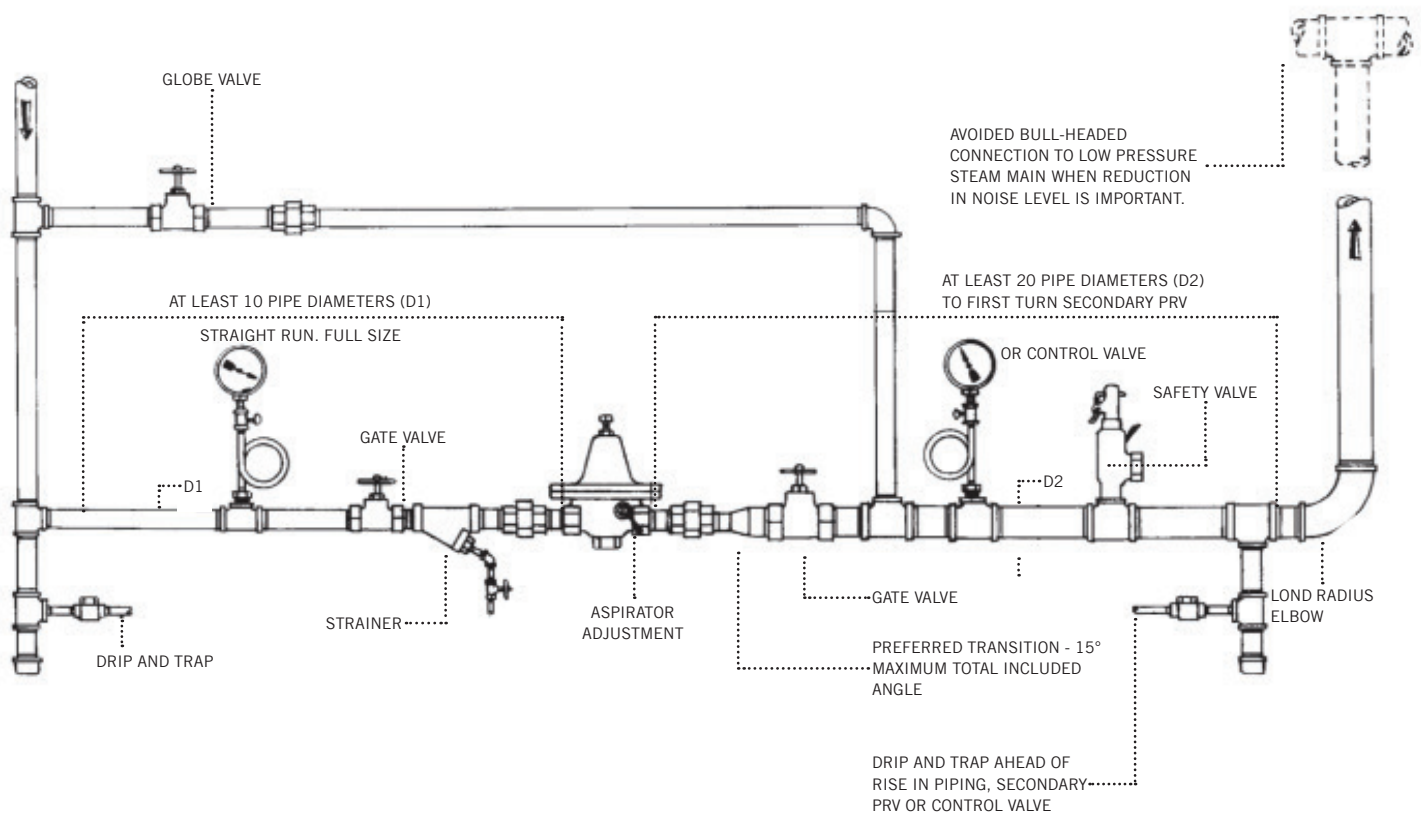

ADVANTAGES:

Accurate control.

Available in Cast Iron, Bronze and Stainless Steel.

Aspirator adjustment for greater sensitivity.


TYPE ED5 PRESSURE REGULATOR FOR ACCURATE CONTROL OF A DEAERATOR

APPLICATION:

To enhance the deaeration of boiler feedwater by accurately controlling the steam pressure and temperature in a deaerator.

OPERATION:

The Type ED5 Pressure Regulator is connected to the Deaerator as shown, with the Type D5 Pilot's Sensing Line connected to the Deaerator. Operation is identical to the Type ED except delivery pressure is sensed in the Deaerator, not the steam piping. The larger, more sensitive diaphragm of the Type D5 Pilot (1 to 25 psig delivery pressure) has twice the accuracy ($\pm 1/2$ psig) of the Type D Pilot (± 1 psig). With the Type D5 Pilot typically set at 5 psig, temperature variation inside the Deaerator is held to ± 1 °F.

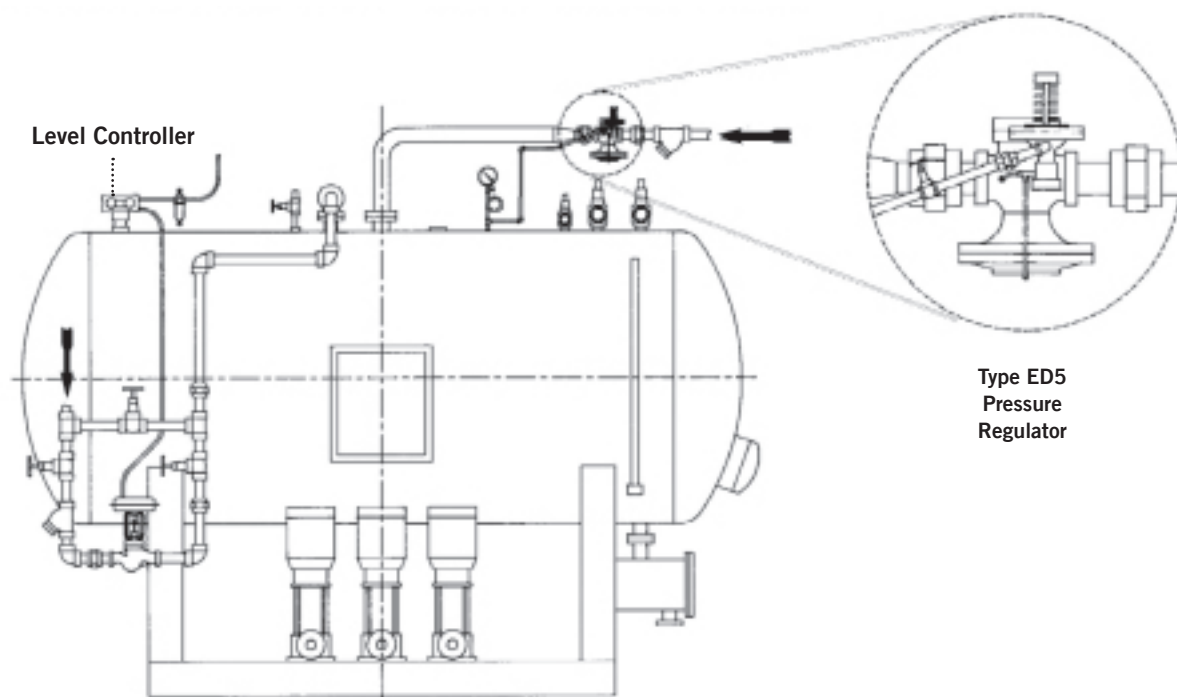

ADVANTAGES:

Self-contained, packless regulator

Increased accuracy for better deaeration

Type E2 substituted if initial steam pressure is between 9 and 15 psig


TYPE EP PRESSURE REGULATOR FOR SELF-CONTAINED CONTROL OF AN UNFIRED STEAM GENERATOR

APPLICATION:

To provide self-contained control of an Unfired Steam Generator.

OPERATION:

The Spence Type EP Pressure Regulator controls the steam supply to the Unfired Steam Generator and maintains a constant, average, adjustable steam outlet pressure of the Unfired Steam Generator regardless of changes in load.

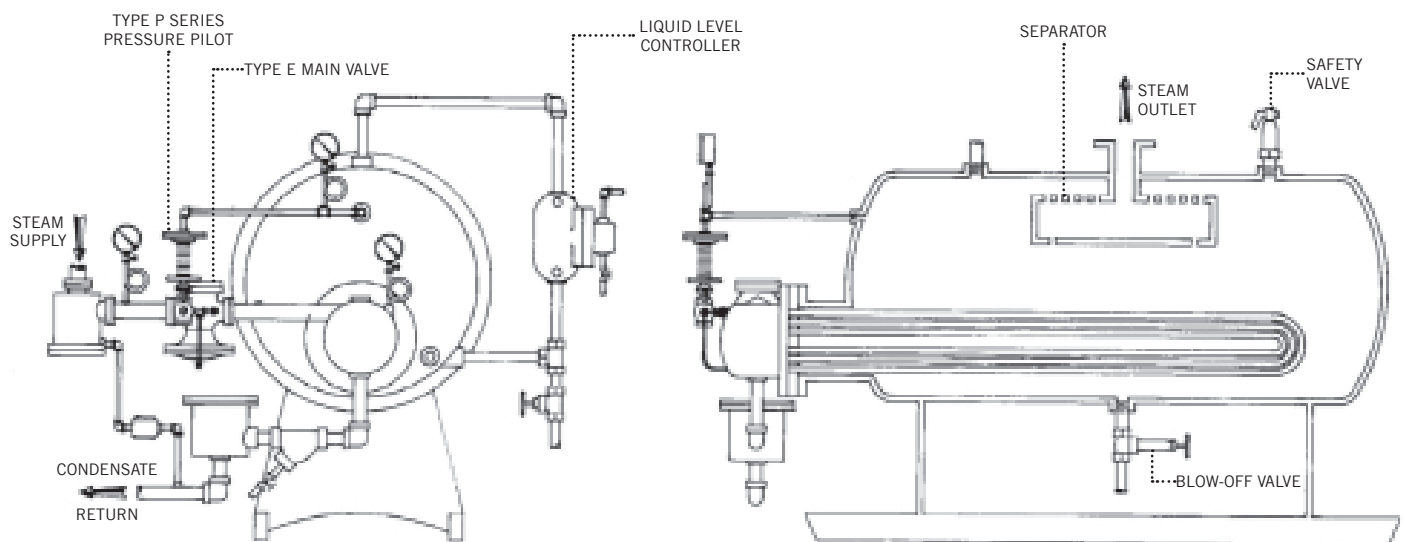

ADVANTAGES:

Can eliminate the need for a Pneumatic Control Valve, Positioner and Pressure Controller.

When additionally equipped with a Type D Pressure Pilot, making a Spence Type EPD Pressure Regulator, the need for a separate Pressure Reducing Valve may be eliminated.


TYPE EP PRESSURE REGULATOR INTEGRALLY MOUNTED FOR SELF-CONTAINED CONTROL OF AN UNFIRED STEAM GENERATOR

APPLICATION:

To provide self-contained control of an Unfired Steam Generator with Integrally Mounted Pilot option for increased rigidity.

OPERATION:

The Spence Type EP Pressure Regulator controls the steam supply to the Unfired Steam Generator and maintains a constant, average, adjustable steam outlet pressure of the Unfired Steam Generator regardless of changes in load.

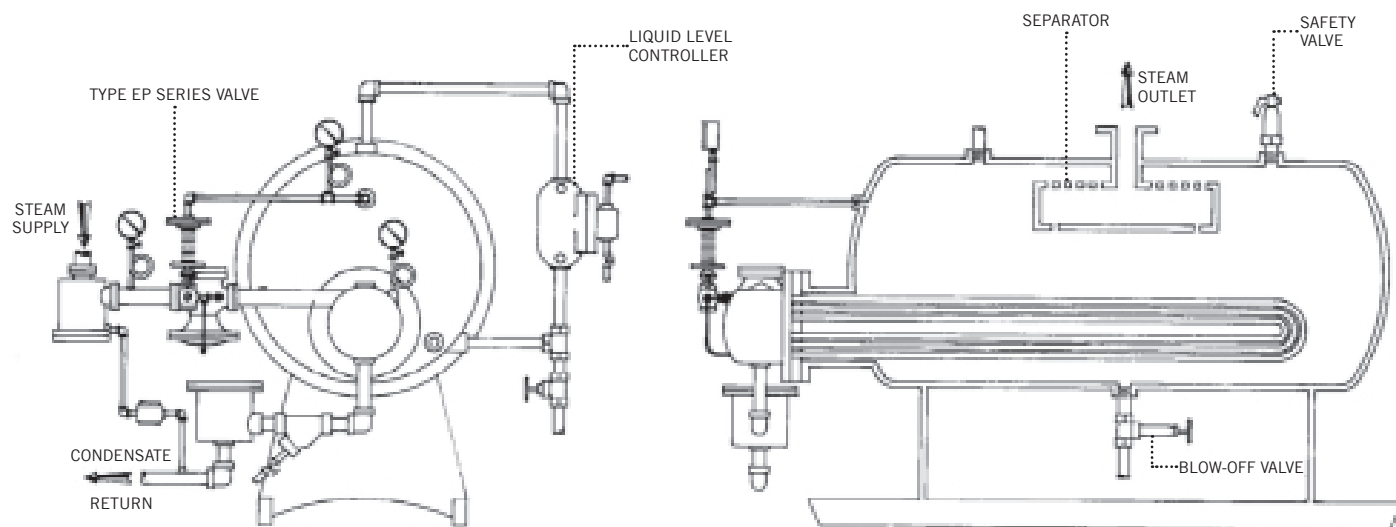

ADVANTAGES:

Can eliminate the need for a Pneumatic Control Valve, Positioner and Pressure Controller.

Integrally Mounted Pilot option increases the rigidity of the Pilot for O.E.M. installation on skid mounted equipment.

TYPE E8


AIR ADJUSTED PRESSURE REDUCING VALVE

APPLICATION:

To reduce high pressure to constant adjustable delivery pressure. Ideal for regulation when poor steam conditions exist.

OPERATION:

Valve is normally closed and is opened by air pressure under the diaphragm. The downstream pressure is on top of the diaphragm, and the required delivery pressure is obtained by adjusting the air pressure.

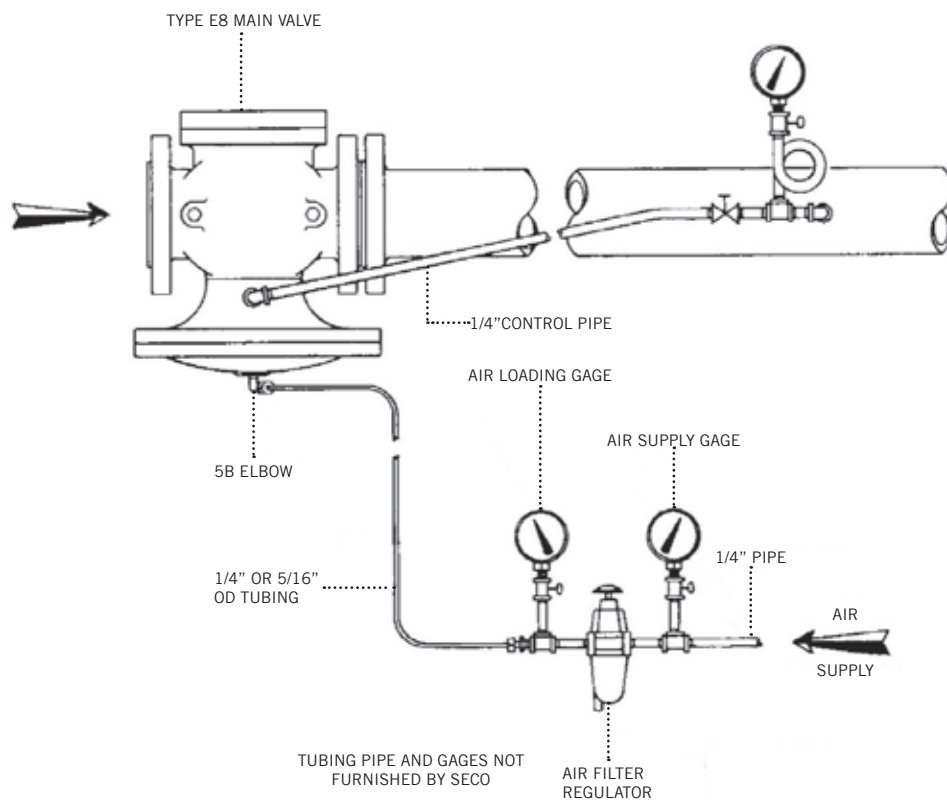

ADVANTAGES:

No pilot required.

No orifices to plug up.

Economy and performance of E valve.


EA SERIES AIR ADJUSTED PRESSURE REGULATOR

APPLICATION:

To provide simple accurate control when varying delivery pressures are required. Ideal for tire moulding, laminate presses and drum dryers.

OPERATION:

Delivery pressure is remotely adjusted by changing air pressure to pilots.

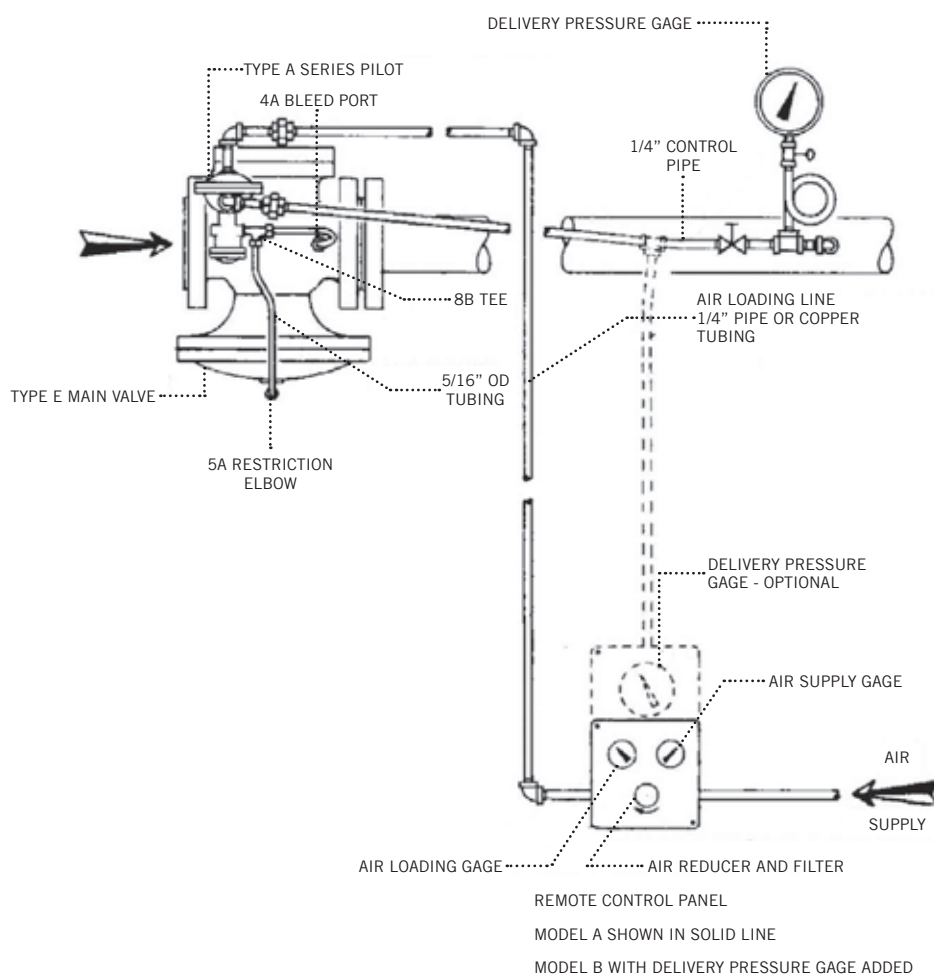

ADVANTAGES:

Ease of adjustment.

Operator control.

Many air adjusted Pilots available.

EA93 AUTOMATIC TRANSFER PRESSURE REDUCING STATION


APPLICATION:

The Spence Type EA93 Automatic Transfer Station is designed to provide accurate and stable control of reduced pressure throughout an exceptionally wide range of flow conditions. This design maximizes the rangeability of the station, while minimizing the extreme throttling encountered in single valve stations operating under the identical conditions. Balanced construction insures stability of regulator.

OPERATION:

The Type EA93 Automatic Transfer Station consists of two pressure reducing valves installed in parallel. The larger of these valves is sized for 100% of the required load. The smaller valve is sized for a fraction (typically 15% to 25%) of the required load. Both valves are operated in a predetermined sequence by a pneumatic controller. An interlocking system of pneumatic relays provided the logic to sequence the operation of the station.

Under low flow conditions, the smaller valve will handle the demands on the station; the larger valve will be shut. As demand increases, the smaller valve will gradually open until it reaches the full open position. Upon further increases in demand, the larger valve will open and, simultaneously, the smaller valve will shut. The larger valve will then carry the higher loads on its own. Should demand drop, this sequence reverses: control of the flow is transferred back to the smaller valve and, simultaneously, the larger valve closes.

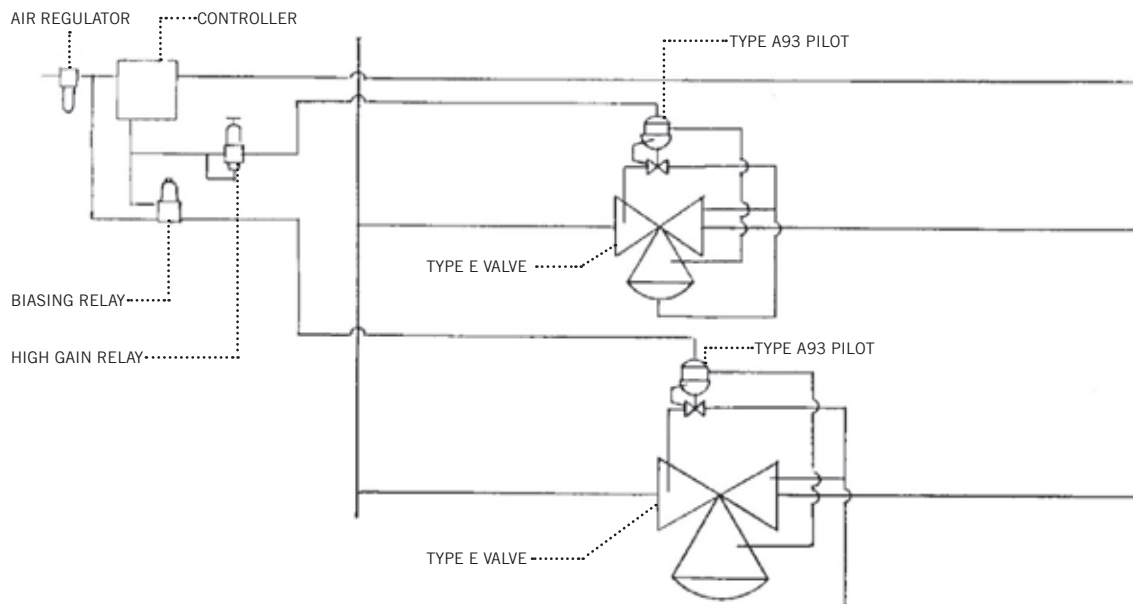

ADVANTAGES:

Greater rangeability than single valve.

Pressure switches can be adapted to system for additional safety.

Standard stock valves can be used.


TYPE E2 SLOW OPENING VALVE

APPLICATION:

When slow opening is required on a low pressure steam system, the E2 can be slowly opened by using a low volume flow control valve.

OPERATION:

System is turned on by activating solenoid, and supplying air to flow control, which sends air loading pressure to diaphragm of E2 valve. Opening time is regulated by adjusting needle valve on flow control. When solenoid is shut off, it bleeds loading air from diaphragm of the E2 valve allowing it to close.

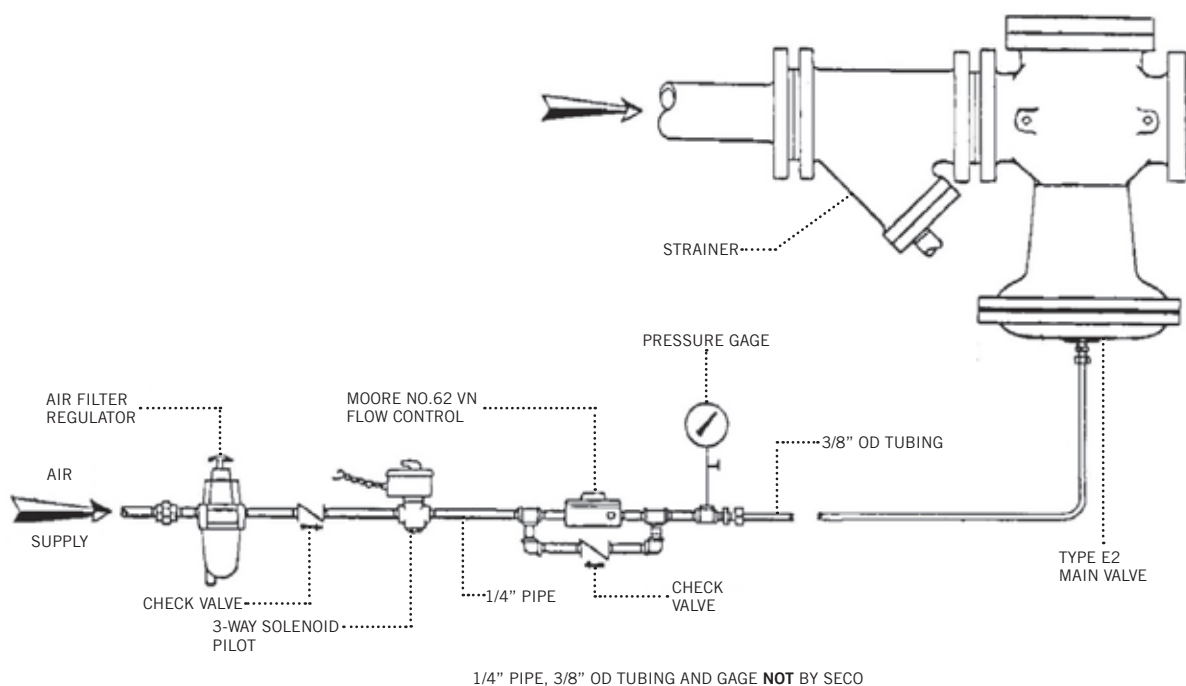

ADVANTAGES:

- Low cost.
- Closes on loss of air.
- Remote controlled.


TYPE EA PRESSURE REGULATOR WITH TYPE B PANEL FOR GAYLORD SHOWER CONTROL

APPLICATION:

To improve paper conditioning and reduce steam consumption by utilizing reduced pressure saturated steam instead of high pressure dry steam at the Gaylord Shower.

OPERATION:

A Spence Type EA Pressure Regulator supplied by a Type B Panel is installed in the steam supply line to the Gaylord Shower and Steamer Pipe (if used) to reduce the steam pressure used. When high pressure saturated steam is reduced in a single step to 0 psi, the quality of the steam may be so enhanced as to introduce a certain degree of superheat. By comparison to low pressure saturated steam, low pressure superheated steam is a rather inefficient transmitter of heat and moisture to paper.

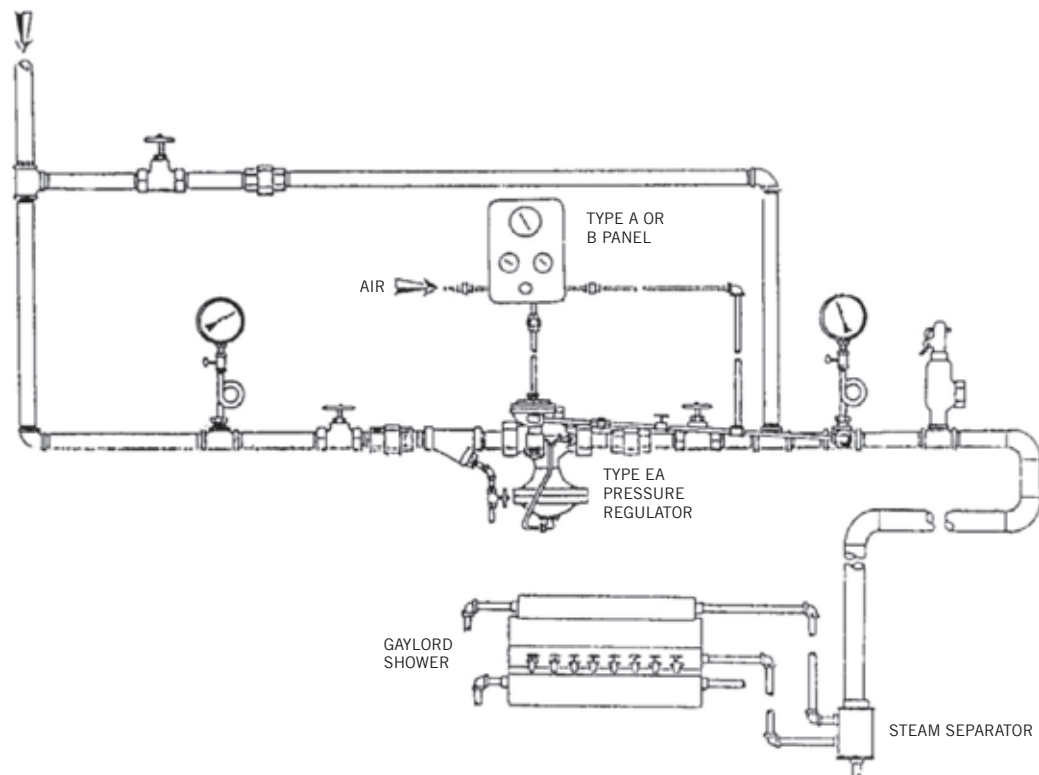

ADVANTAGES:

- Reduced steam consumption.
- Improved paper conditioning.
- Self-contained, packless construction.
- Reduced pressure relatively unaffected by varying supply pressures.
- B Panel may be remotely located.


TYPE EA PRESSURE REGULATOR WITH TYPE B PANEL FOR CONTROL OF THE PLATE SECTIONS OF A CORRUGATOR

APPLICATION:

When corrugator process speed is increased to the point that the flash steam available to the plate sections is insufficient, high pressure steam is admitted to the plate sections to permit increased process speed.

OPERATION:

A Spence Type EA Pressure Regulator is installed between a high pressure steam main and the flash steam supplied to the plate section. The Type B Panel is used to supply the air loading pressure to the Type A Pilot to establish the minimum steam pressure in the plate section. When insufficient flash steam is available to maintain the pressure desired, the Type EA opens and admits sufficient steam to maintain the set pressure.

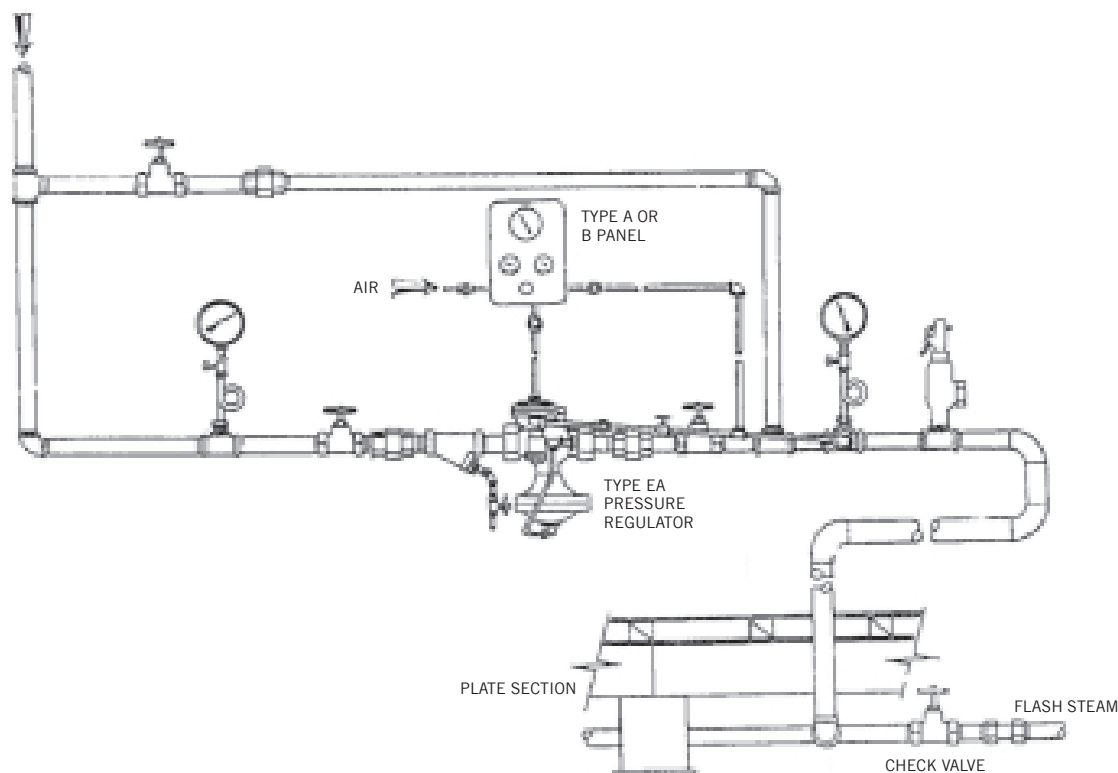

ADVANTAGES:

- Increased process speed may be possible.
- Self-contained, packless construction.
- B Panel may be remotely located.
- Fast response to process variables.

TYPE EM33D


ELECTRICALLY OPERATED REDUCING VALVE

APPLICATION:

To provide control of unit heater coil pressure and room temperature.

OPERATION:

When the thermostat closes the circuit and opens the Type M33 solenoid pilot, the D pilot operates the Type E main valve to control header pressure. Then, as unit heaters warm up, the aquastats close the individual fan circuits, starting the fans.

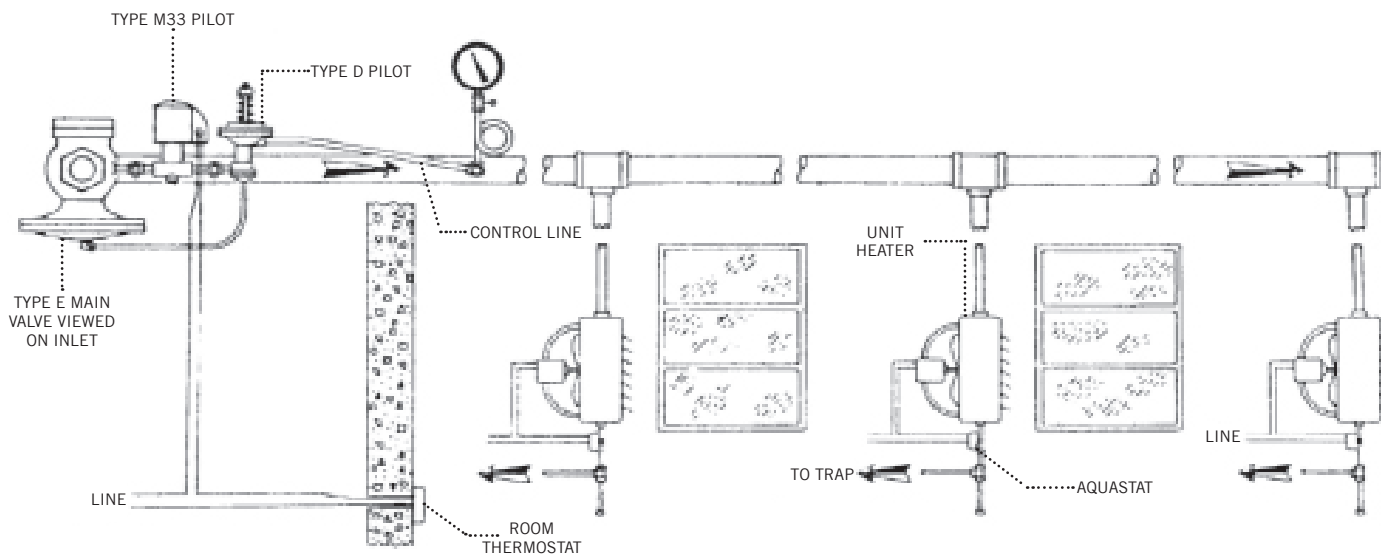

ADVANTAGES:

Reduced pressure can prevent “hot-blast”.

Reduced pressure reduces trap wear.

Steam shut-off and pressure controlled by same valve.

Aquastat operation prevents cold drafts.

Seasonal pressure adjustment partially balances output to load and reduces cycling on room temperature.


TYPE ED208D ELECTRONIC STARTUP CONTROL IN CONJUNCTION WITH A TIME PROPORTIONING OUTDOOR RESET CONTROLLER

APPLICATION:

Effect energy savings by adapting a Time Proportioning Reset Controller to a building's steam heating system. A Time Proportioning Outdoor Reset Controller regulates a building's heating system based on the actual heat loss for a given outdoor temperature by computing and varying the required "on/off" cycle with changing outdoor conditions.

OPERATION:

When the Time Proportioning Outdoor Reset Controller calls for an "on" cycle, it activates the D208's Electronic Time Controller. The ED208D then follows its preprogrammed start-up cycle, which gradually heats up and pressurizes the building's steam heating system until the downstream pressure reaches the setting of the D pilot, which then assumes normal control. When the Time Proportioning Outdoor Reset Controller signals an "off" cycle, the D208's Electronic Time Controller is deactivated and the ED208D closes in approximately one minute.

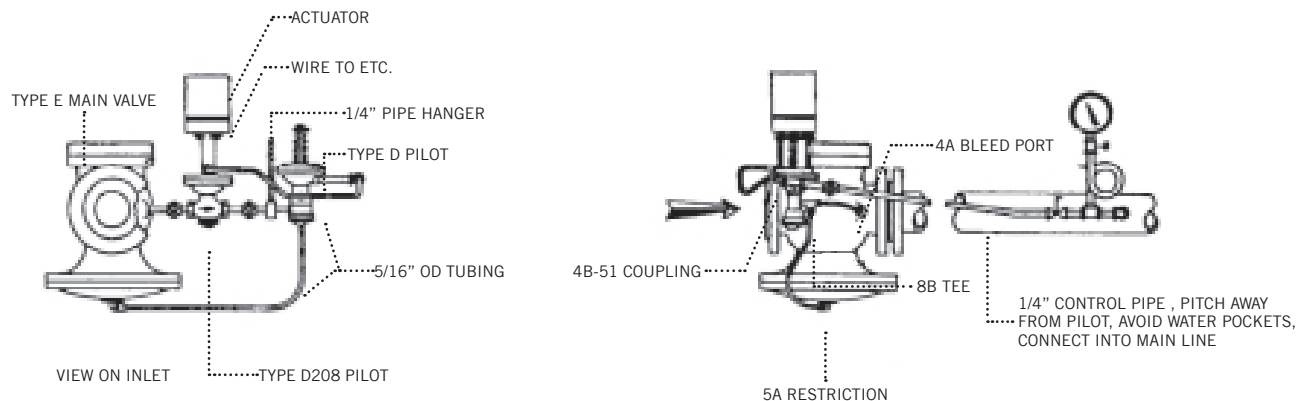

ADVANTAGES:

Substantial fuel savings since the steam heating system is energized only when required and in the amount necessary.

Substantial man-hour savings when frequent start-ups are necessary.

Reduces start-up load effect on boilers by controlling the rate at which the steam heating load is applied.

Minimizes the possibility of water hammer by gradually heating lines and enabling the traps to discharge condensate.

TYPE ED208P14-EF14D ELECTRONIC SLOW STARTUP CONTROL FOR PARALLEL OPERATION

APPLICATION:


To gradually heat up and pressurize a parallel installation.

OPERATION:

When activated, the D208 Electronic Slow Start-up Control on the lead valve follows its pre-programmed start-up cycle, which gradually heats up and pressurizes the system until the delivery pressure reaches the setting of the P14 pilot, which then assumes control. The output of the lead station's P14 pilot is also connected to the trailing station's F14 pilot. This F14 pilot is set approximately 20 psi higher than the delivery pressure. Arranged in this manner, the trailing station is prohibited from normal parallel operation until the lead station has been fully activated and its capacity exceeded.

FEATURES:

May be started from manual switch, thermostat or time clock. May be readily added to most existing Spence Parallel Operated Pressure Reducing Stations.

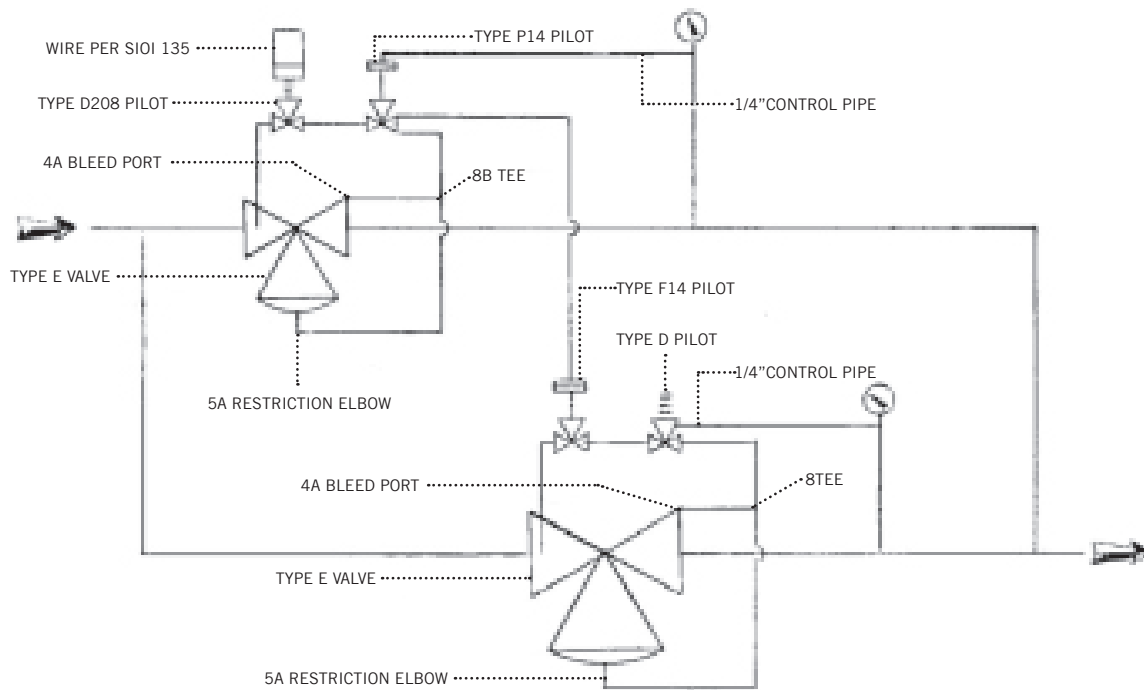

ADVANTAGES:

Substantial fuel savings when used to turn on steam heating mains only when required by outdoor thermostat control.

Substantial man-hour savings when frequent start-ups are necessary.

Reduces start-up load effect on boilers by controlling the speed with which the load is applied.

Minimizes the possibility of water hammer by gradually heating lines and enabling the traps to discharge condensate.

TYPE ED210


ELECTRONIC MODULATING REGULATOR

APPLICATION:

To electronically modulate a Main Valve to control pressure or temperature.

OPERATION:

The D210 pilot will modulate a process variable in relation to a proportional control input signal. There is a continuous signal between the system's input, the Servo-Amplifier and the pilot actuator. This constant signal gives the D210 pilot the ability to react immediately to a command from the input and modulate the Main Valve.

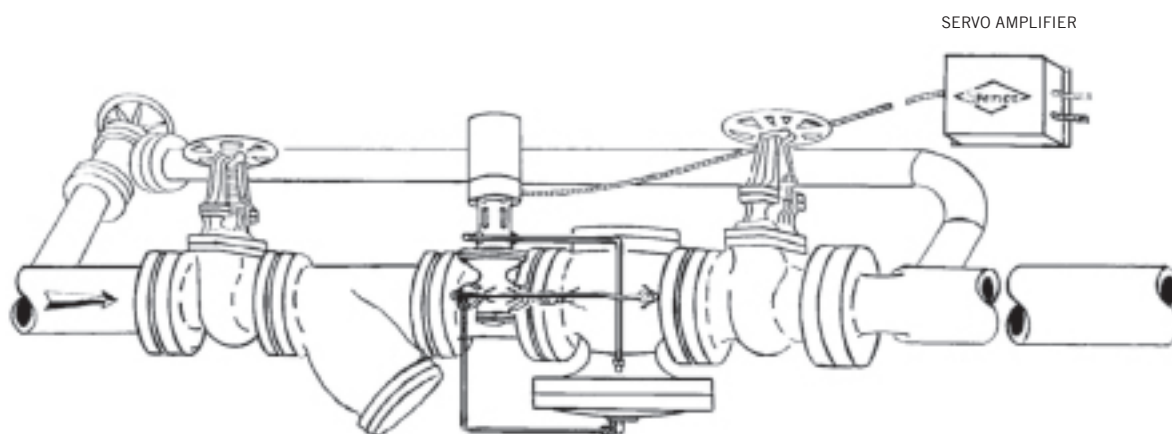

**Typical Installation of the Type ED210
Pressure Regulator protected by a Strainer**

ADVANTAGES:

Back-up power supply available.

Optional input signals:-

1 - 5 ma

4-20 ma

10 - 50 ma

Selectable from 0 to 24 VDC

Can be used on standard Spence valve. Adaptable to energy management systems.

TYPE ED208D


ELECTRONIC START-UP CONTROL

APPLICATION:

To gradually heat up and pressurize a steam distribution line.

OPERATION:

The D208 Pilot is controlled by a pre-programmed Electronic Time Controller (E.T.C.). When activated by the customer supplied “switch”, the Pilot slowly opens the Main Valve over the 6 - 96 minute time period selected. When deactivated, the Main Valve closes in 1 minute.

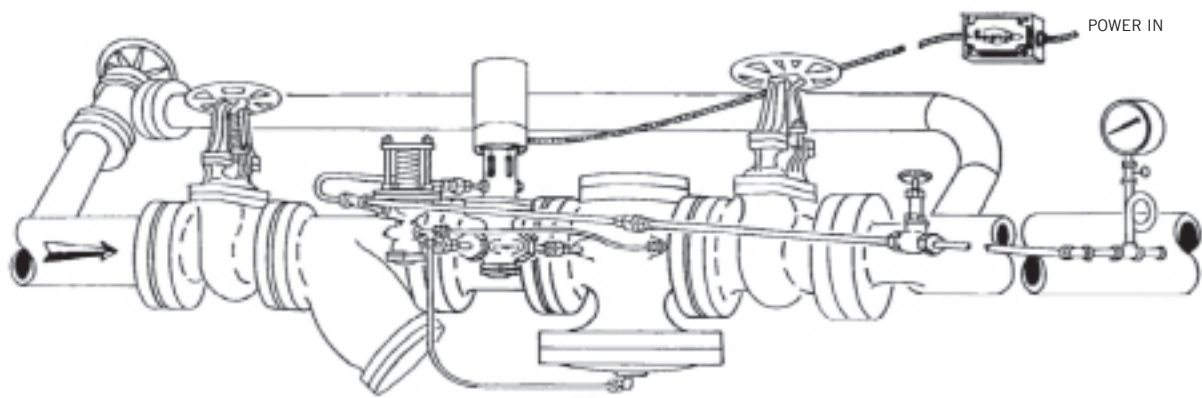

**Typical Installation of the Type ED208D
Pressure Regulator protected by a Strainer**

ADVANTAGES:

May be started from manual switch, thermostat or time clock. May be readily added to most existing Spence ED pressure reducing stations.

Substantial fuel savings when used to turn steam into heating mains only when required by outdoor thermostat control.

More even temperature is maintained in a comfort control system.

Substantial man-hour savings when frequent start-ups are necessary.

Reduces start-up load effect on boilers by controlling the speed with which the load is applied.

Minimizes the possibility of a water hammer by gradually heating lines and enabling the traps to discharge condensate.

Back up power supply available.


TYPE EDM33D PRESSURE REDUCING VALVE WITH TWO SET POINT CONTROL

APPLICATION:

To provide simple, economical and rapid means for alternating between a high and low control point, when two control settings are repeatedly used.

OPERATION:

Standard ED operation with one pilot set higher than other. Pilot No. 1 has the higher setting and is controlled by the M33 solenoid. When solenoid is closed, pilot No. 2 is in control at the lower setting. When higher setting is required, solenoid is opened and pilot No. 1 is in control.

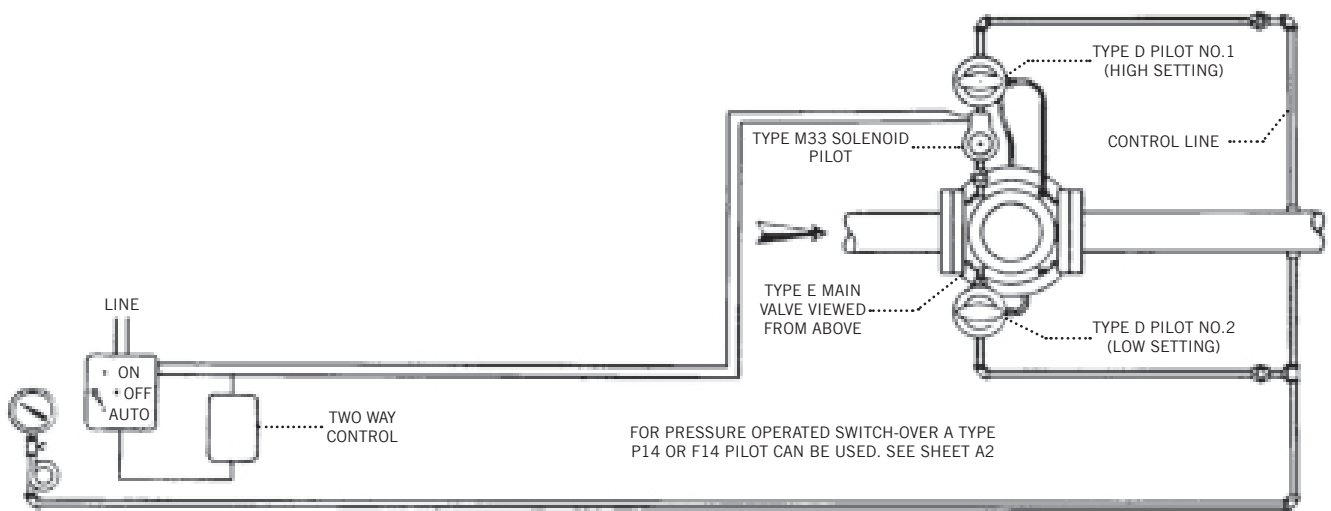

ADVANTAGES:

Consists of standard equipment.

Less expensive than two separate regulators.

Can be applied to existing regulator.

Can be tied to automatic control system (as illustrated). Essentially no limit on location of station.

TYPE D36


WATER PRESSURE REDUCING VALVE

APPLICATION:

Designed for liquid pressure reduction, where very fast reaction to intermittent flows or rapid changes are a system requirement.

OPERATION:

Valve is opened by compressing adjusting spring. Downstream pressure acts against adjusting spring, and pressure is set by increasing or decreasing spring pressure.

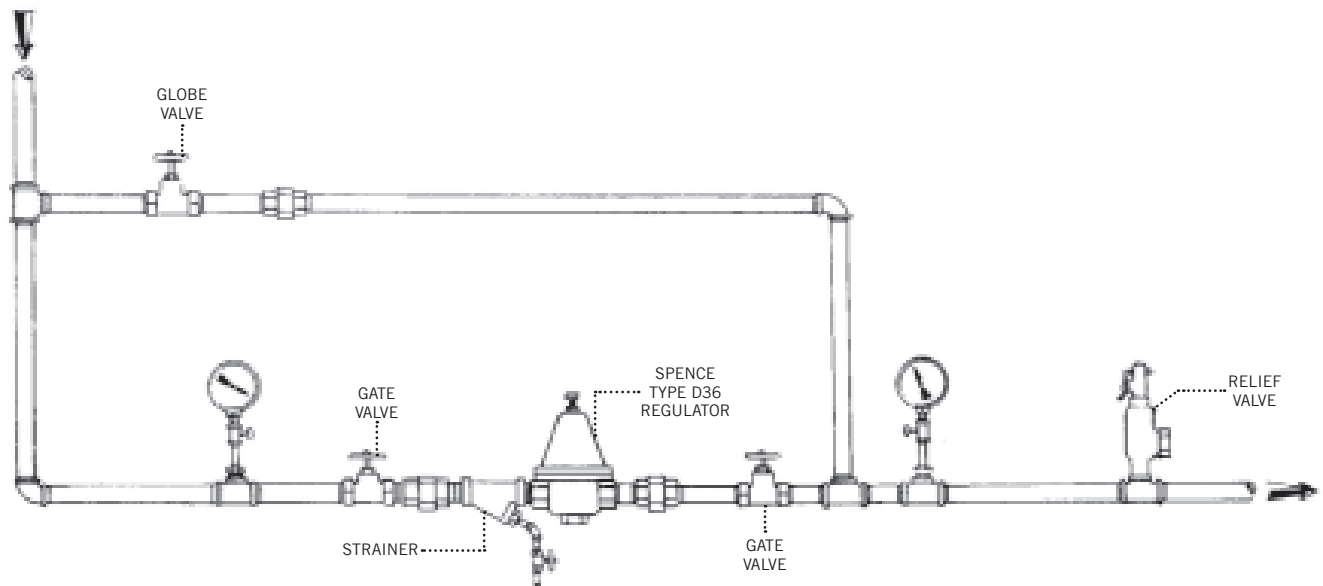

ADVANTAGES:

High capacity.

Large sensitive diaphragm.

Meets requirements of:

- A.S.S.E Standard 1003.
- Southern Standard Plumbing Code.
- MIL Standard MILV-18146A, Type I.
- I.A.P.M.O.
- City of Los Angeles.
- W.P.O.A. Uniform Plumbing Code.

TYPE C34D


PILOT OPERATED PRESSURE REDUCING VALVE

APPLICATION:

Designed to reduce a steady or varying inlet pressure to a constant, adjustable delivery pressure. Recommended for applications needing high accuracy of regulation, but with load changes not too violent for pilot operated valve.

OPERATION:

Delivery pressure, acting on pilot diaphragm, throttles main valve to maintain set pressure.

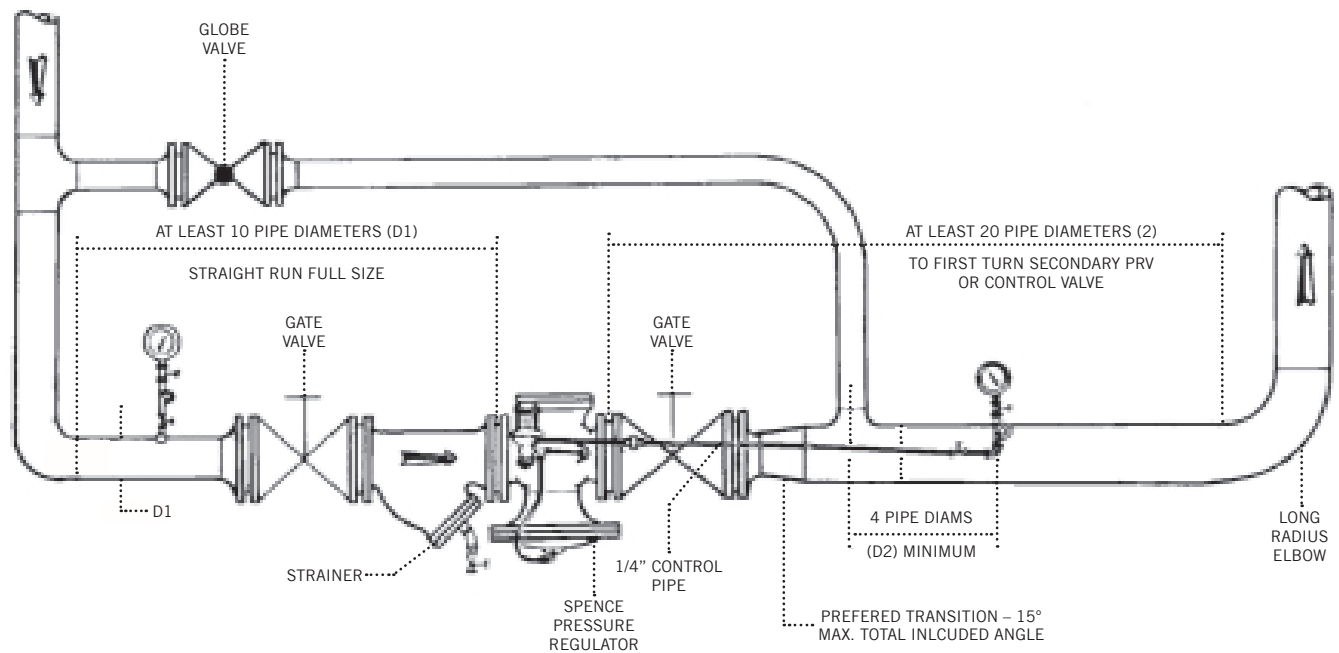

ADVANTAGES:

- Self operated.
- Packless.
- High Capacity.


TYPE ET14 & ET14D TEMPERATURE REGULATOR

APPLICATION:

To provide temperature control in a storage water heater.

OPERATION:

Steam flowing through the main valve is controlled by the T14 pilot. Variations in temperature at the thermostat opens and closes T14 pilot, which operates the valve. If pressure control is needed to protect heater coils, the D pilot is used.

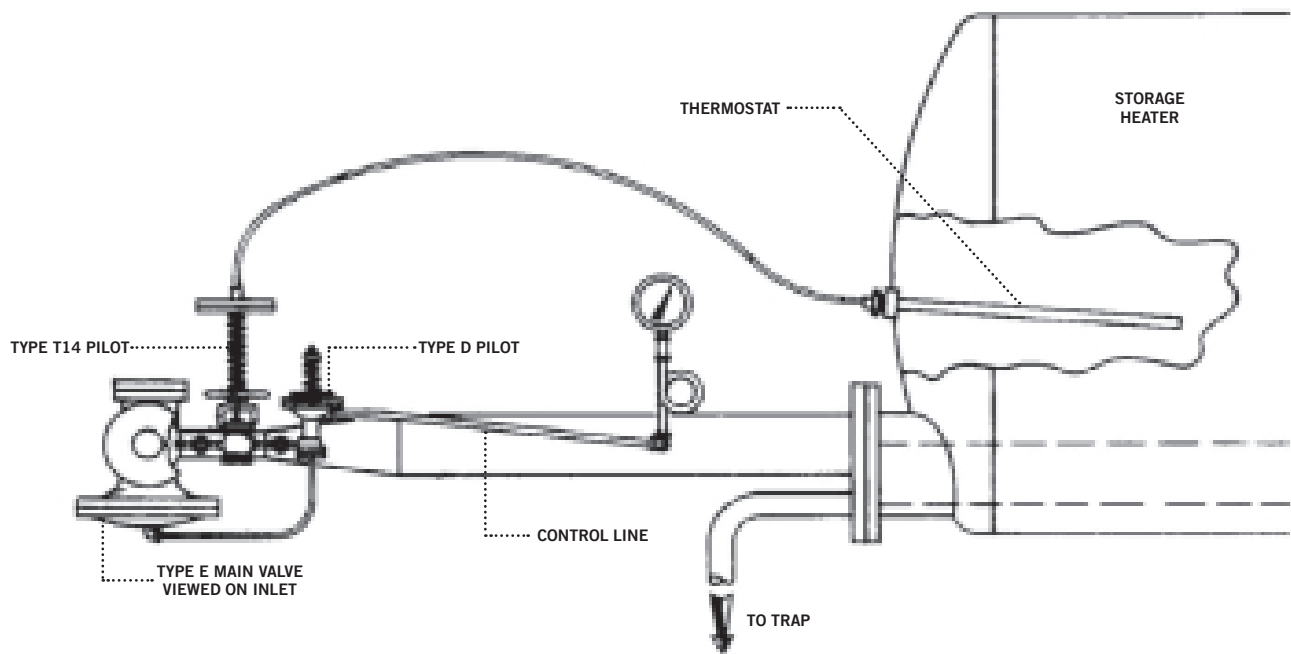

ADVANTAGES:

- Pilot operated accuracy.
- No separate PRV required.
- Many temperature ranges available.
- All packless construction.


TYPE ET124 & ET134 TEMPERATURE REGULATOR

APPLICATION:

To provide temperature control in a converter or instantaneous heater.

OPERATION:

Steam flowing through the main valve is controlled by T124 or T134 pilot. Steam pressure in the heater is modulated in proportion to temperature and load variations.

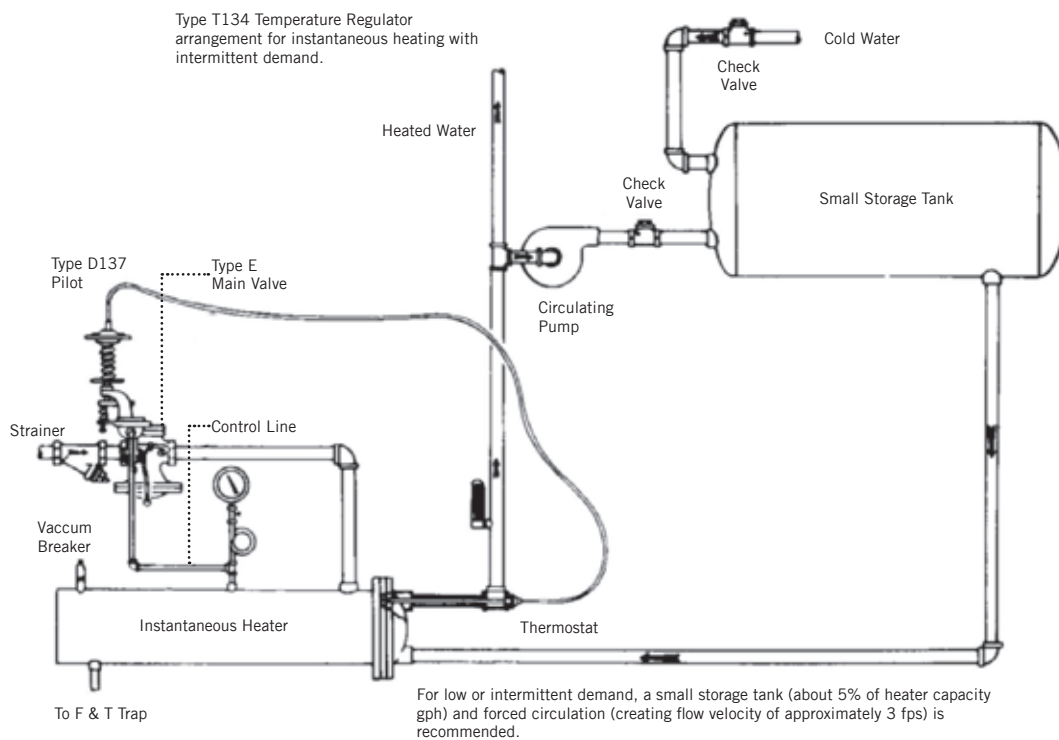

ADVANTAGES:

No separate PRV required.

Pressure sensing anticipates load changes before thermostat sees temperature change.

Standard stock valves.


TYPE C34T52 COOLING REGULATOR

APPLICATION:

To provide temperature control for refrigeration condensers, lube oil coolers, process coolers and water cooled heat exchangers.

OPERATION:

The main valve and pilot are normally closed. When the temperature at the thermostat bulb increases above its set point, the valve opens and flows cooling water to maintain temperature setting.

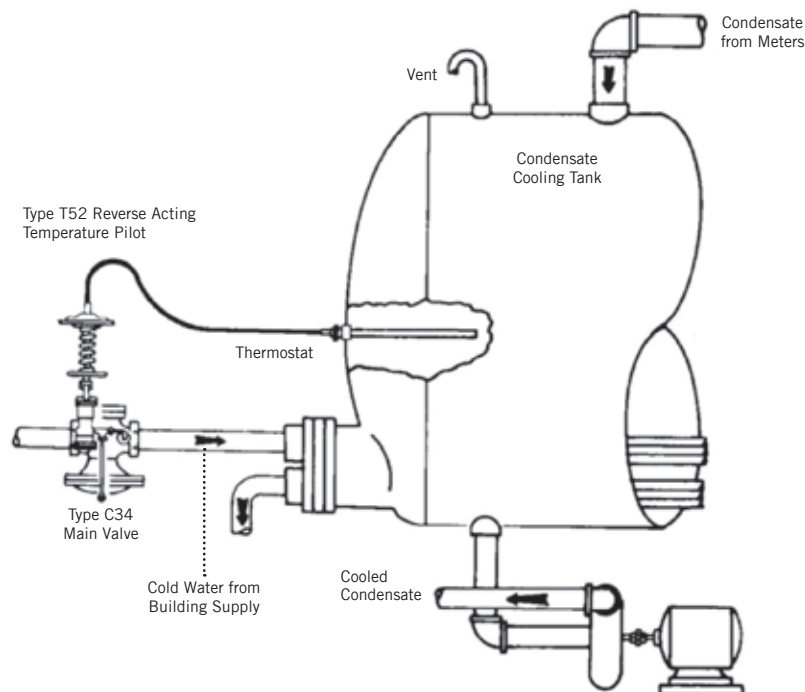

ADVANTAGES:

- Self contained.
- Balanced construction for greater stability.
- Can be furnished with pressure limit pilot.
- Tight shut-off.


TYPE ET14D TEMPERATURE REGULATOR

APPLICATION:

To control fuel oil temperature in a storage tank.

OPERATION:

The T14 pilot opens and closes the main valve with slight variations in stored-oil temperature. The D pilot “takes over” to control coil pressure when the T14 pilot opens wide. The thermostat bulb can be raised or lowered by loosening the packing nut and sliding the bulb extension through the packing.

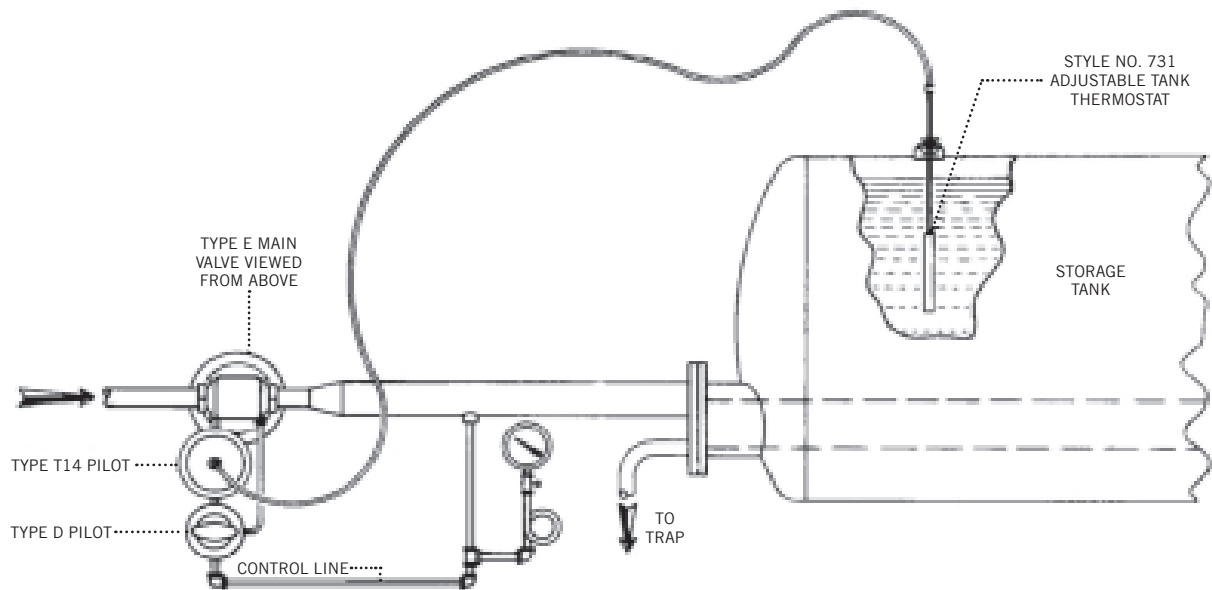

ADVANTAGES:

Permits top-insertion. Bulb can be removed even when tank is full.

Permits adjusting bulb location for best efficiency, as tank level varies.

Minimizes oil carbonation through pressure control.

Combining pressure and temperature regulation in same valve reduces maintenance.

Smaller high pressure line can be used for steam transmission to tank.


TYPE ET14T14 TEMPERATURE REGULATOR

APPLICATION:

To provide temperature control of heating coils and prevent freeze-up, if outside temperature drops below freezing.

OPERATION:

When outside temperature is above freezing, the pilot sensing that temperature is off and the valve is controlled by the pilot sensing inside temperature. If outside temperature drops below freezing, the pilot sensing outside temperature will open the valve regardless of inside temperature.

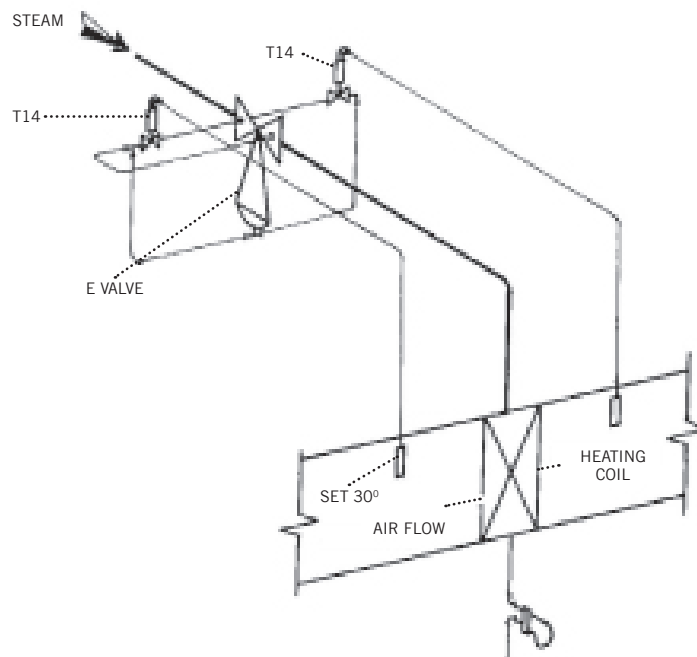

ADVANTAGES:

One pilot will over-ride other.

Pilot operated accuracy.

Self contained


TYPE ET134 TEMPERATURE REGULATOR FOR POULTRY SCALDER

APPLICATION:

To provide self-contained pressure reduction, temperature and pressure control to a Poultry Scalders.

OPERATION:

A Poultry Scalders is essentially an open tapped multi-nozzle steam injection heater custom fabricated to suit the customer's requirements. Steam flowing through the **Type E** Main Valve is controlled by the **Type T134 Pilot**. Steam pressure to the injection nozzles is modulated, within the pre-set range of the **T134's** pressure limit spring, in proportion to temperature, typically 140°F., and process variations.

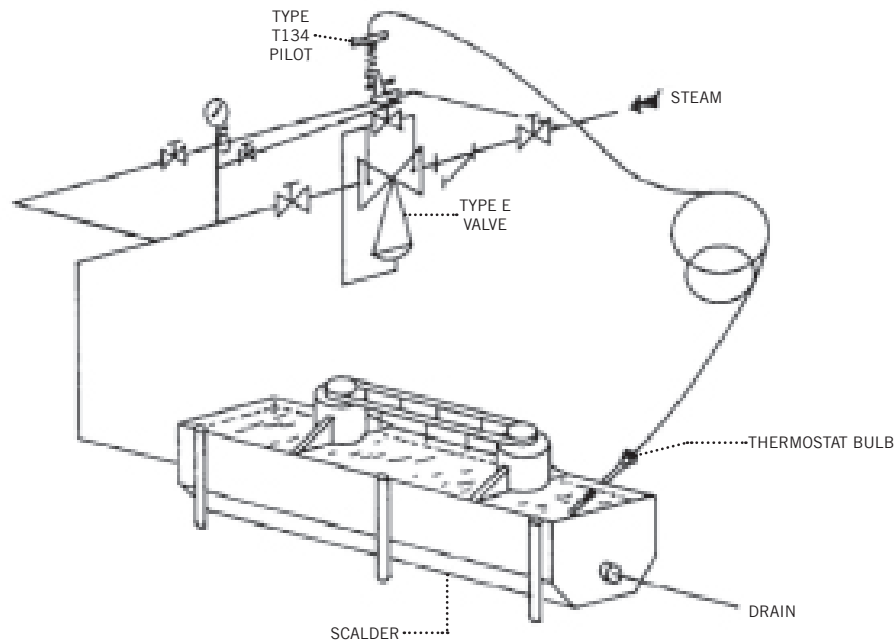

ADVANTAGES:

Self-contained, packless construction.

Provides pressure reduction, temperature and pressure control in a single unit.

Adaptable to existing scalders utilizing Pneumatic Temperature Controllers by substituting the appropriate Type T134 Pilot in place of the Type A Pilot.


TYPE C34T52 TEMPERATURE REGULATOR FOR CHILLED WATER SYSTEM

APPLICATION:

To provide self-contained temperature control of a chilled water system.

OPERATION:

The Spence Type C34T52 Temperature Regulator controls the chilled water return by not allowing water to return to its source until the set point of the T52 pilot has been reached.

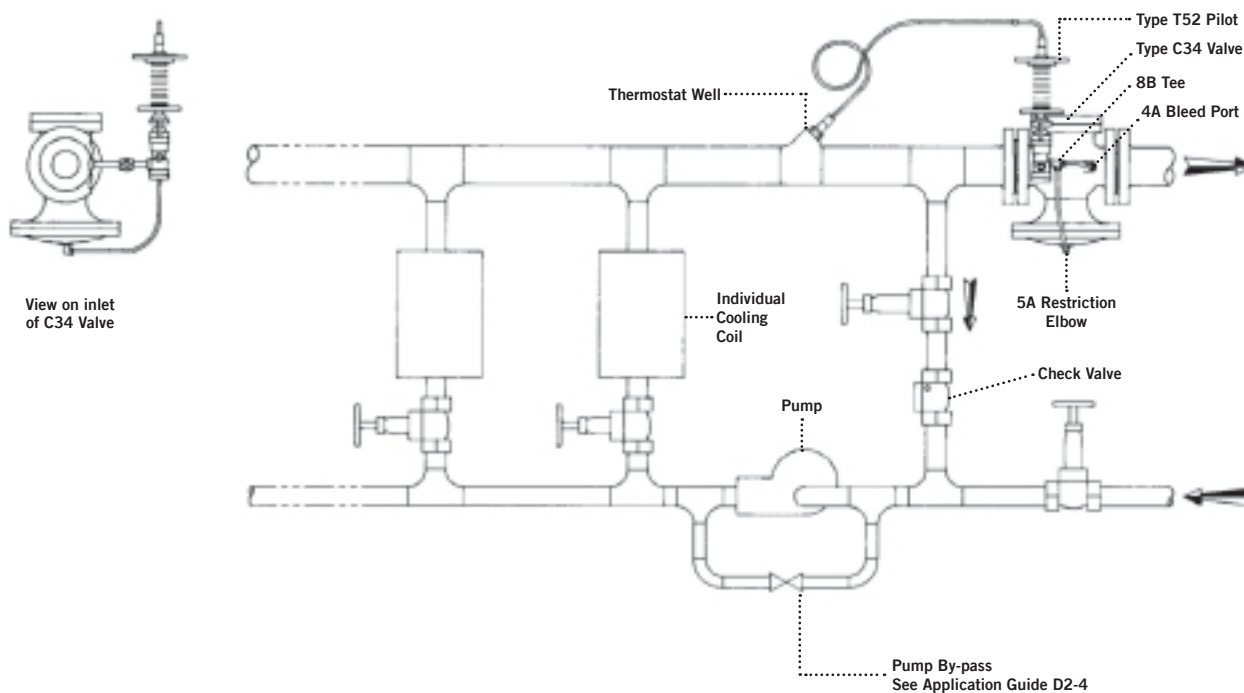

ADVANTAGES:

Self-contained.

Tight shut-off.

Pilot operated accurate temperature control.

Economical, chilled water only returned when set point temperature is reached.

System stability is maintained with variations in chilled water supply temperature.

NOTES:

1. For large high-rise buildings, a desired head pressure may need to be maintained. To accomplish this, an appropriate F Series pilot may be added to the C34T52.
2. If the chilled water return must not exceed a desired pressure, an appropriate D pilot may be added to the C34T52.


SERIES 2000 DIRECT OPERATED TEMPERATURE REGULATOR FOR STORAGE HEATER

APPLICATION:

To provide economical temperature control of a storage heater.

OPERATION:

Steam (or other heating medium) is supplied to the Series 2000 valve body. Variations in temperature at the bulb opens and closes the valve thus maintaining the desired temperature..

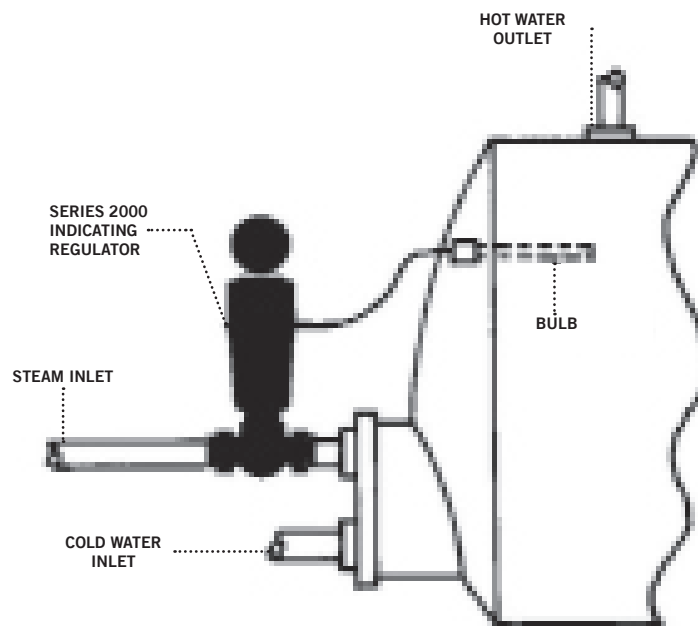

ADVANTAGES:

Inexpensive.

Uncomplicated

Ideal when load fluctuations are minimal

Self-contained


SERIES 2000 DIRECT OPERATED TEMPERATURE REGULATOR FOR PLATE HEATER

APPLICATION:

To provide economical temperature control of an open topped tank heater (ie: plating tank).

OPERATION:

Operation: Steam (or other heating medium) is supplied to the Series 2000 valve body. The bulb is suspended over the top of and into the tank. Variations in temperature at the bulb opens and closes the valve thus maintaining the desired temperature in the tank.

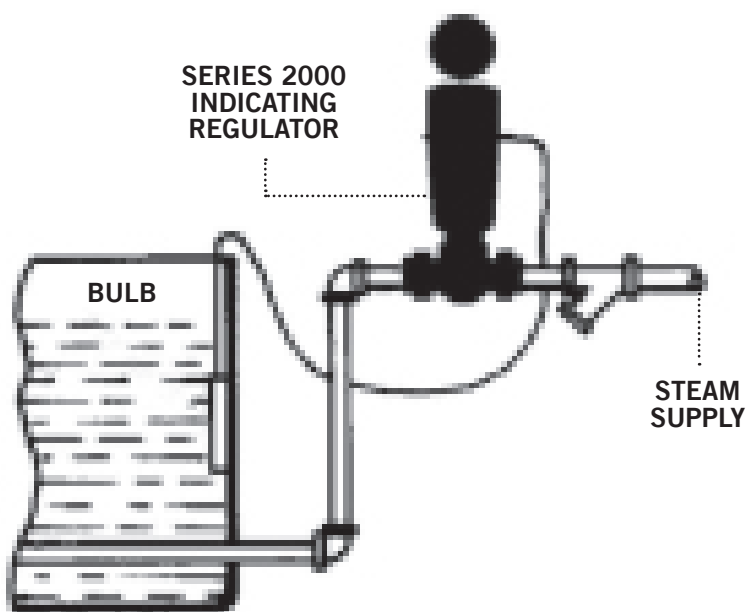

ADVANTAGES:

Inexpensive.

Uncomplicated

Self-contained


SERIES 2000 DIRECT OPERATED TEMPERATURE REGULATOR FOR ENGINE JACKET COOLING

APPLICATION:

To provide engine jacket cooling.

OPERATION:

Reverse acting Series 2000 is installed in the engine's cooling system as indicated in the diagram. The bulb senses the engine's coolant temperature and, when the coolant temperature reaches the Series 2000's set point, the valve opens and modulates to maintain the desired coolant temperature.

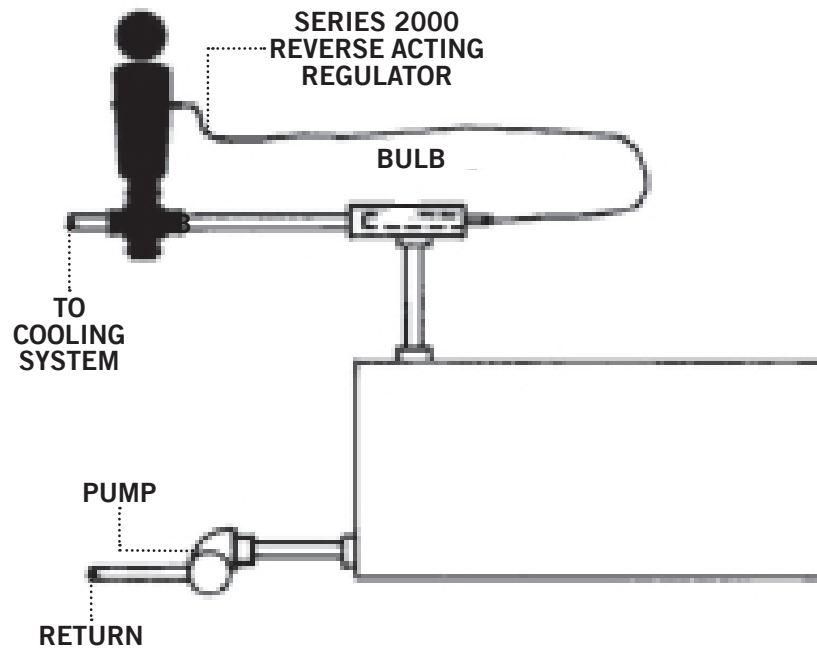

ADVANTAGES:

Inexpensive.

Uncomplicated

Self-contained


SERIES 2000 DIRECT OPERATED TEMPERATURE REGULATOR FOR LIQUID COOLING TANK

APPLICATION:

To operate a liquid cooling tank.

OPERATION:

As the warm liquid to be cooled reaches the Series 2000's bulb, the valve opens by admitting coolant (brine) into the cooler's coils. The Series 2000 modulates about its set point, thereby controlling the temperature of the cooled liquid.

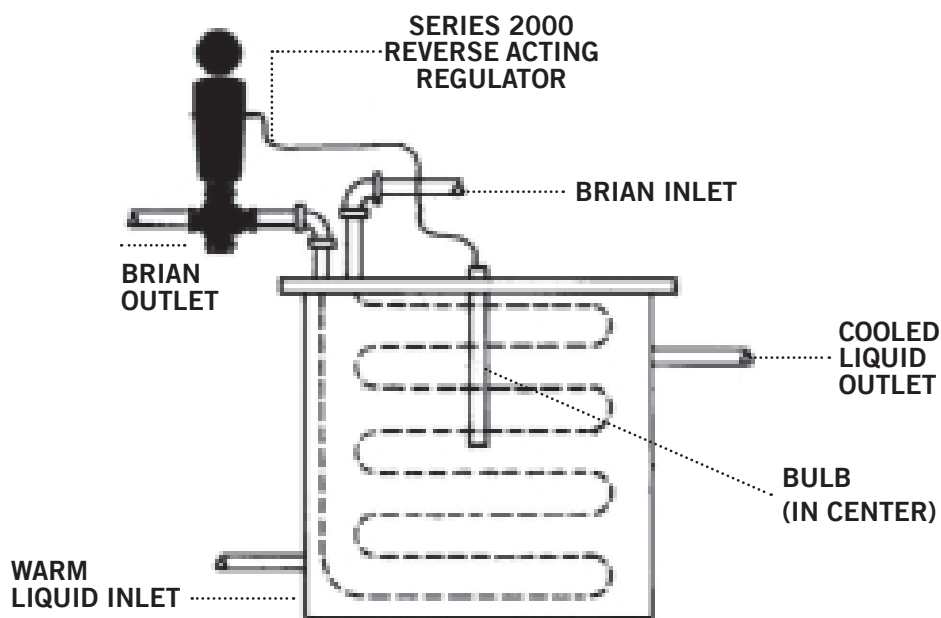

ADVANTAGES:

Inexpensive.

Uncomplicated

Self-contained


SERIES 2000 DIRECT OPERATED TEMPERATURE REGULATOR FOR THREE-WAY BLENDING/MIXING

APPLICATION:

To operate as a 3-way blending / mixing valve.

OPERATION:

The Series 2000 Three Way valve is installed as indicated in the diagram. In this case, cold water enters the valve from the left while the heated boiler water enters from the bottom. The bulb senses the temperature in the storage tank and modulates the amounts of cold and hot water blended (mixed) to maintain the desired temperature of the water in the storage tank.

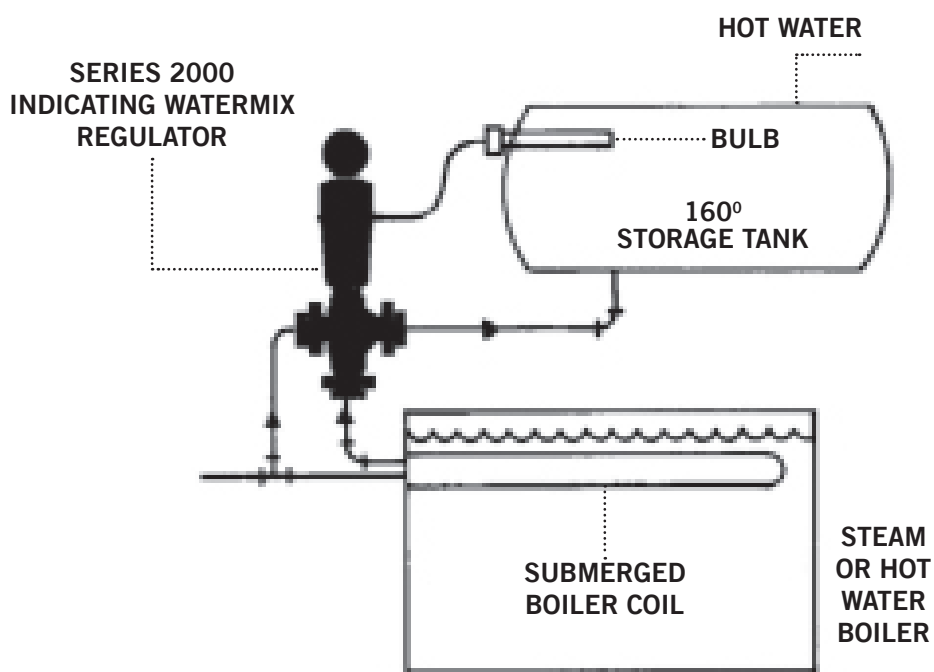

ADVANTAGES:

Inexpensive.

Uncomplicated

Self-contained


SERIES 2000 DIRECT OPERATED TEMPERATURE REGULATOR FOR THREE-WAY DIVERTING

APPLICATION:

To operate as a 3-way diverting valve.

OPERATION:

Engine coolant is supplied to the left, bottom discharge is returning to the engine and right discharge is to cooler. Engine coolant is returned to the engine until it reaches the valve's set point. At that point, the valve starts modulating between returning engine coolant to the engine and discharging to the cooler to maintain the desired temperature.

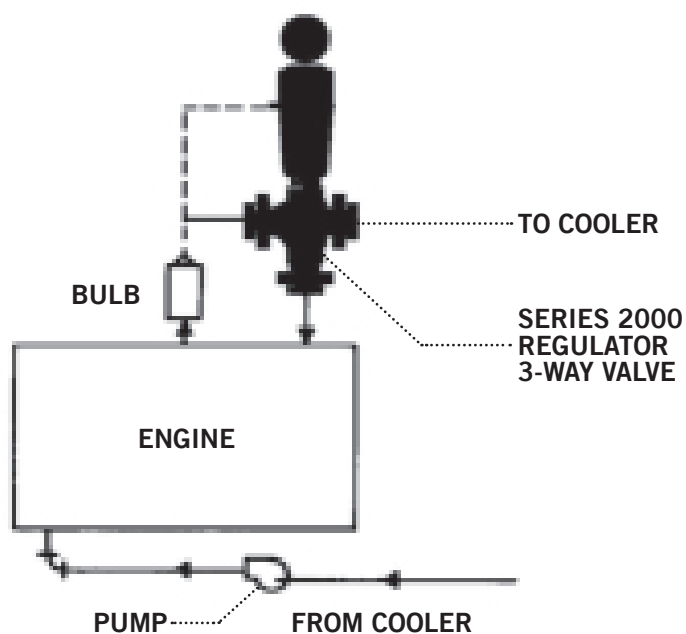

ADVANTAGES:

Inexpensive.

Uncomplicated

Self-contained


TYPE EAT61 AIR CONTROLLED TEMPERATURE REGULATOR

APPLICATION:

To provide fast accurate control on instantaneous heaters and difficult process applications.

OPERATION:

Temperature variations at thermostat bulb of T61 pilot changes its output air signal going to A series pilot. The changing air signal positions the A pilot and main valve to maintain temperature setting.

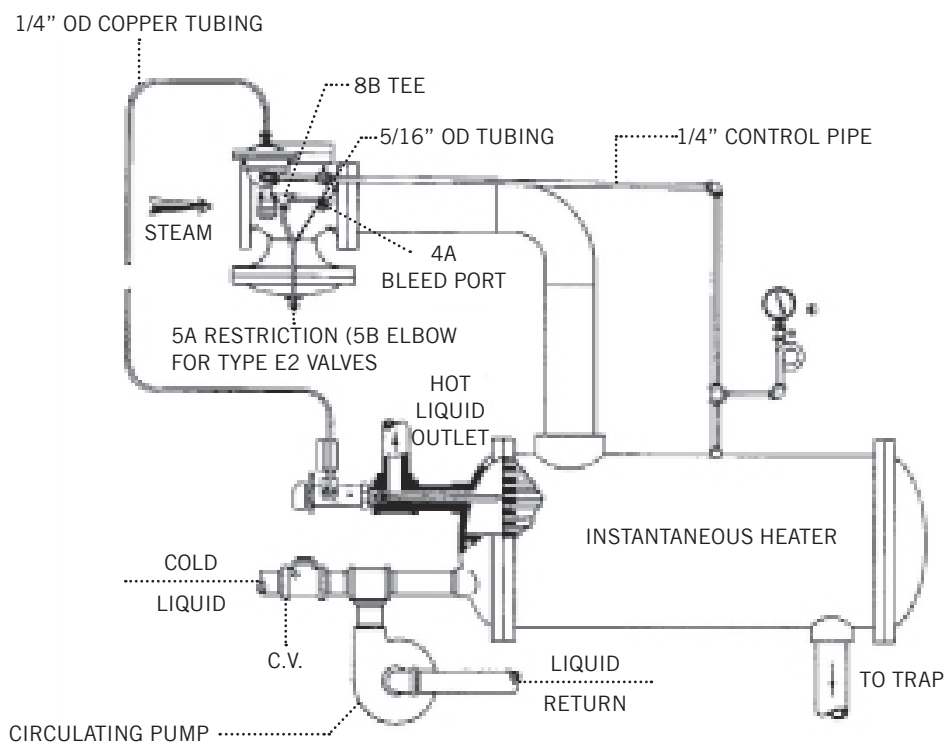

ADVANTAGES:

T61 and A pilot combine for cascade type control.

Accurate sensitive bi-metallic thermostat.

Low air consumption.


TYPE EA TEMPERATURE REGULATOR FOR REMOTE THERMOSTAT CONTROL

APPLICATION:

To provide indoor-outdoor temperature control of hot water temperatures in a heating system.

OPERATION:

The remote bulb thermostat on the master controller provides a pneumatic feed-back based on outside air temperature. The pneumatic feed-back from the master controller raises or lowers the set point of the sub-master controller, which puts out a varying signal to the Spence EA regulator to maintain proper water temperature.

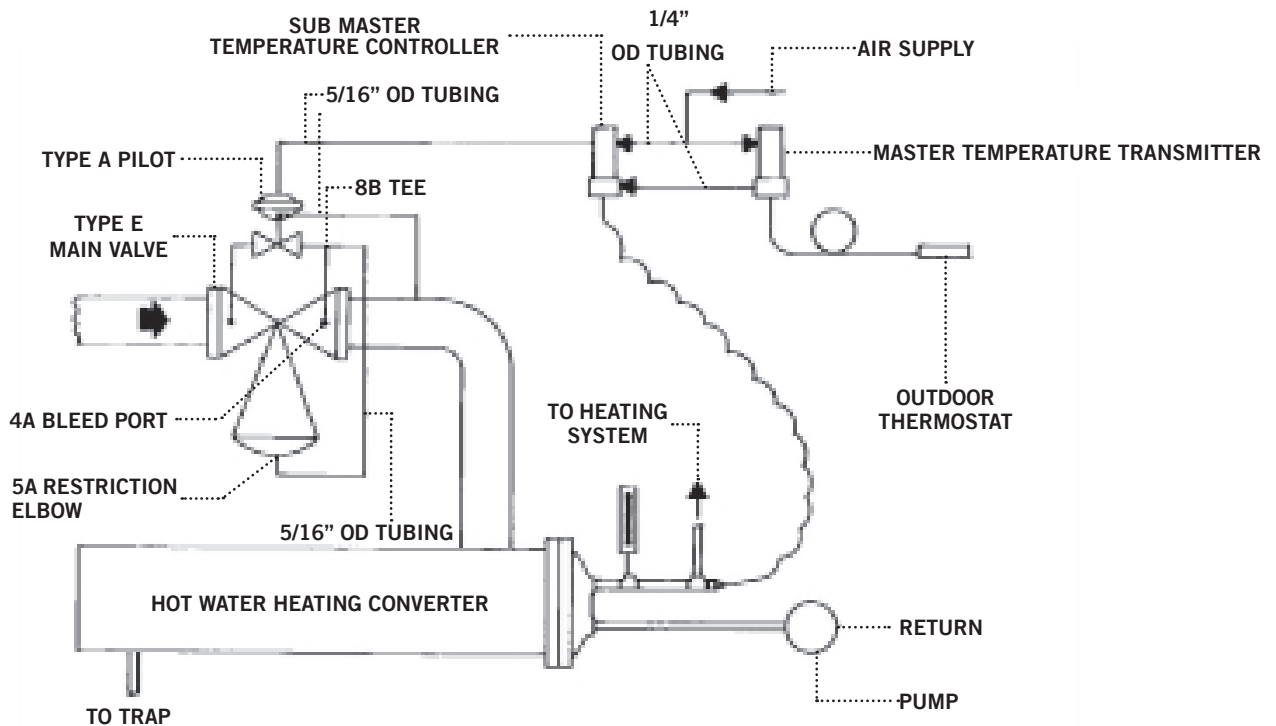

ADVANTAGES:

Accurate temperature control.

Economical, water heated only when needed.

Standard valve and pilot.


TYPE ET134 SELF-CONTAINED TEMPERATURE REGULATOR FOR STARCH MIXER

APPLICATION:

To provide accurate temperature control with pressure limitation in a Starch Mixer for corrugated adhesive usage.

OPERATION:

A Starch Mixer is essentially an open topped, agitated sparge tube storage heater, in which the adhesive is prepared before being placed in storage. The temperature probe of a Type T134 Temperature Pilot is placed in an active area of the Starch Mixer. Once activated, the ET134 flows steam to the heater until either the proper temperature or pressure limit is reached, then the ET134 closes, opens or throttles to maintain its preset temperature or pressure limit.

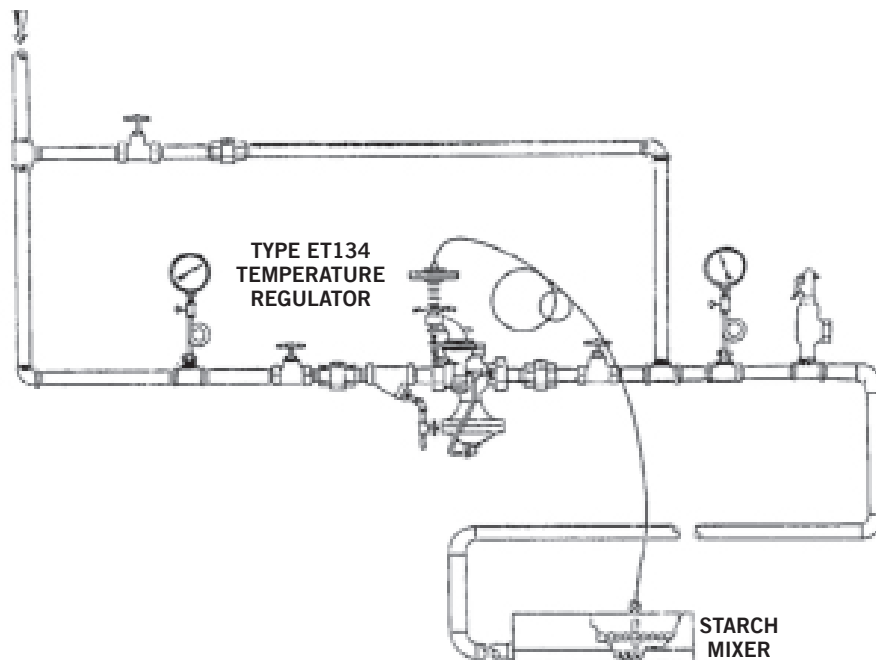

ADVANTAGES:

Self-contained packless construction.

If electronic activation of a remotely located regulator is needed, a Type M Pilot can be added, making an EMT134

No separate PRV needed


TYPE EAT60 TEMPERATURE REGULATOR FOR WAX APPLICATION CONTROL

APPLICATION:

To provide fast accurate control of the wax temperature in order to assure the proper coating of the product.

OPERATION:

The Spence Type EAT60 utilizes cascade control, whereby a pneumatic Temperature Controller, sensing wax temperature, is used to reset a pneumatically adjusted pressure regulator sensing the steam pressure in the heater. Any change in demand on the heater causes a change in the steam pressure in the heater, and the EA Pressure Regulator responds to it immediately, maintaining a given pressure in the heater. When a change in wax temperature is sensed by the T60 Temperature Controller, it resets the EA Pressure Regulator to a new pressure, thus maintaining a fixed wax temperature.

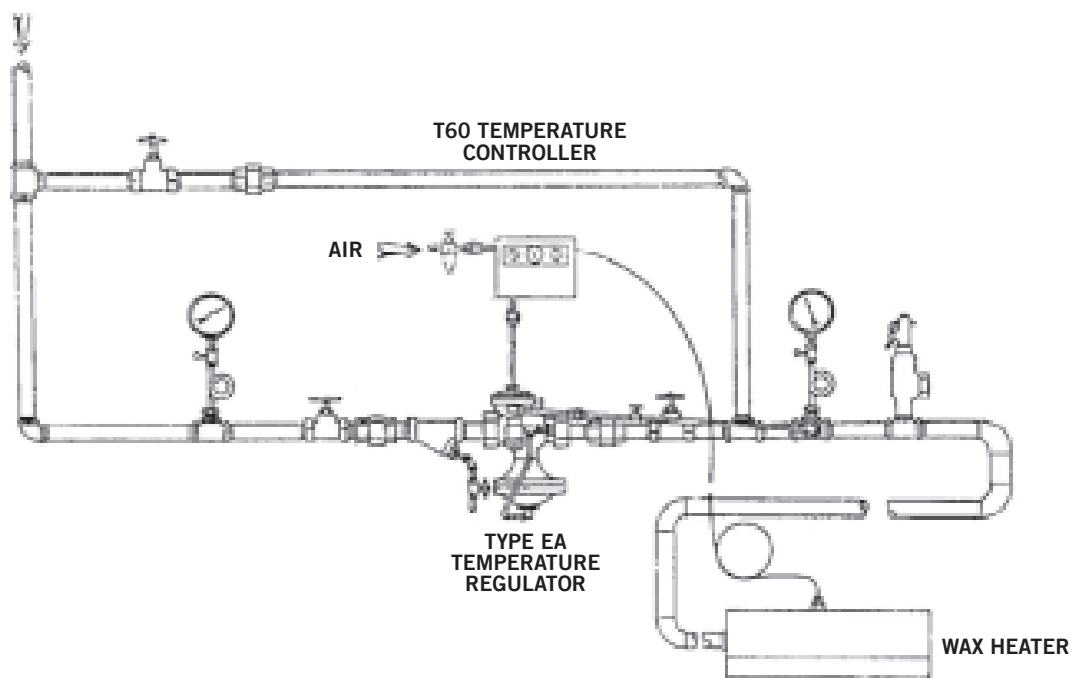

ADVANTAGES:

Fast accurate control of wax temperature

Packless construction

Pressure sensing anticipates load changes before thermostat sees temperature change (cascade control).

No separate PRV needed.

TYPE ET124A


VISCOSITY/TEMPERATURE REGULATOR

APPLICATION:

To provide increased economy by controlling the viscosity of the fuel oil to a burner unit while, at the same time, retaining conventional self-contained temperature regulation for emergency use in the event of pneumatic system failure.

OPERATION:

In normal operation the 1/4" gate valve supplying the Type T124 Pilot is closed, the 1/4" gate valve supplying the Type A Pilot is open. The Norcross Viscosity Meter samples the viscosity of the fuel oil discharge of the fuel oil heater and adjusts the 3 to 15 psi air loading signal to the Type EA Regulator. The correct steam pressure and flow is supplied to the fuel oil heater to optimize fuel oil viscosity for burner unit efficiency. In the event of a pneumatic system failure, closing the 1/4" gate valve supplying the Type A Pilot and opening the 1/4" gate valve supplying the Type T124 Pilot provides conventional temperature control by a Type ET124 Temperature Regulator. (see Application Guide C1-2)

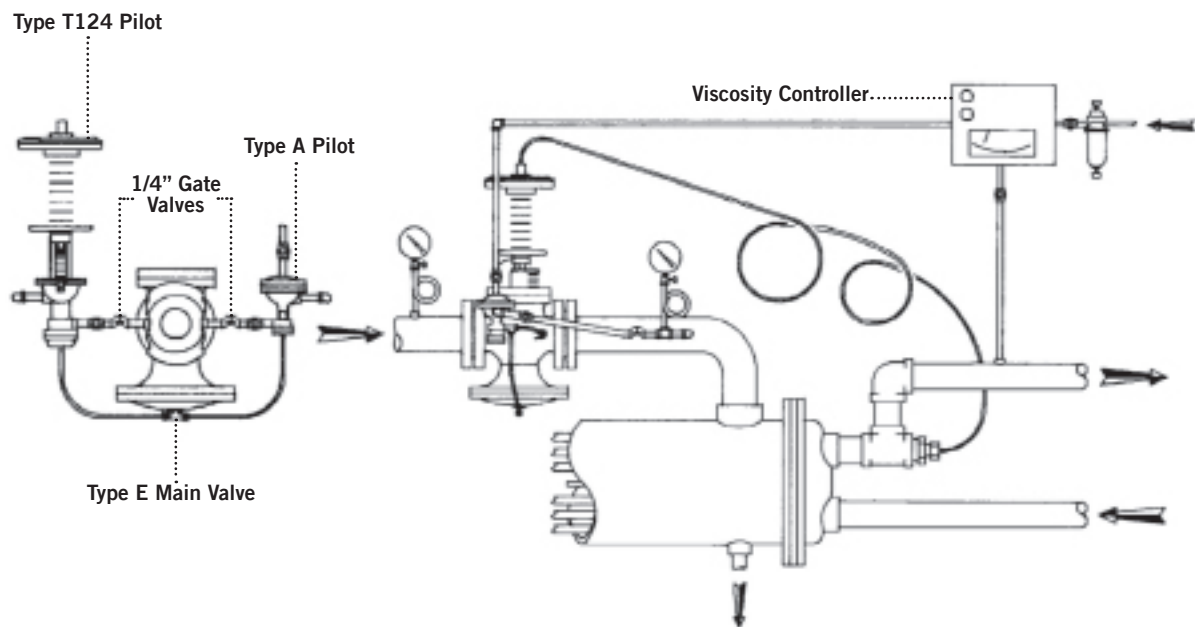

ADVANTAGES:

Increased fuel oil economy

Self-contained Temperature Regulator available for stand-by service


TYPE EQ BACK PRESSURE REGULATOR

APPLICATION:

To maintain pressure in a flash tank so that steam can be used in low pressure main.

OPERATION:

When steam pressure in the flash tank increases above the Q pilot setting, the E valve will open and vent the excess to maintain correct pressure.

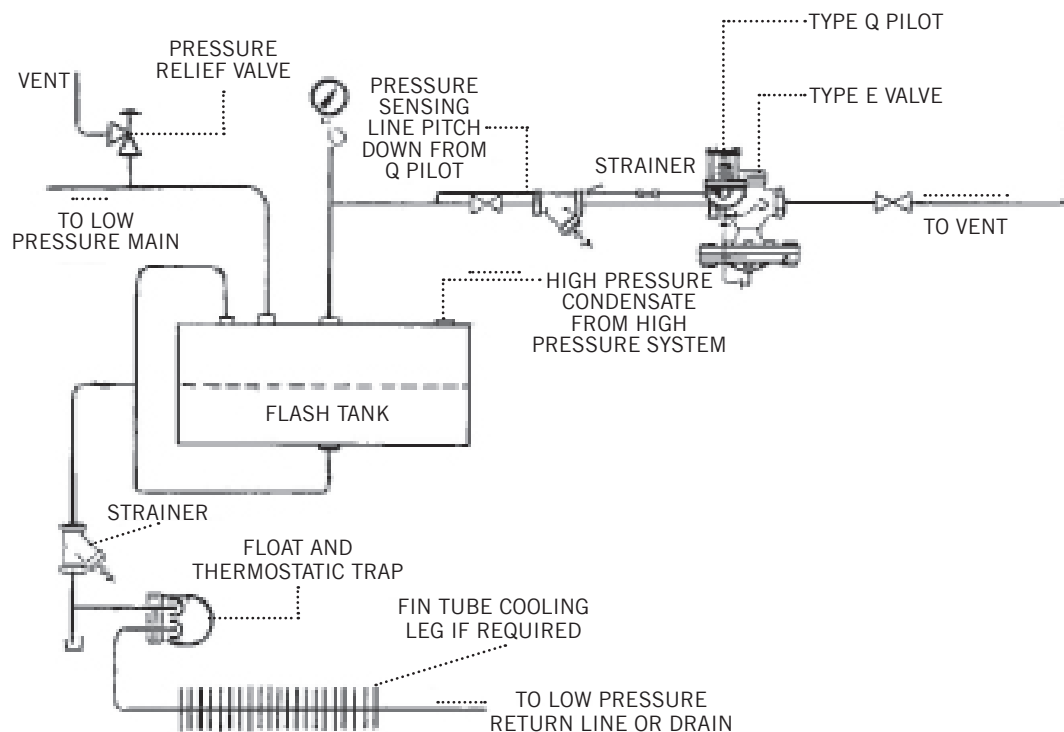

ADVANTAGES:

Accurate control.

Saves money by using flash steam.


TYPE EF14D PRESSURE REDUCING VALVE WITH BACK PRESSURE CONTROL

APPLICATION:

To retard flow of steam to a rate that can be handled by the boiler.

OPERATION:

Frequently, large automatic on-off control valves, or inexperienced equipment operators, impose load pick-ups on a steam system that the boilers cannot follow. An F14 pilot added to the pressure regulator feeding such loads can be set to throttle, when the boiler pressure sags, as it does on such a quick load surge. Then, when the boiler has increased its steam rate, the F pilot will re-open and permit full load to be handled.

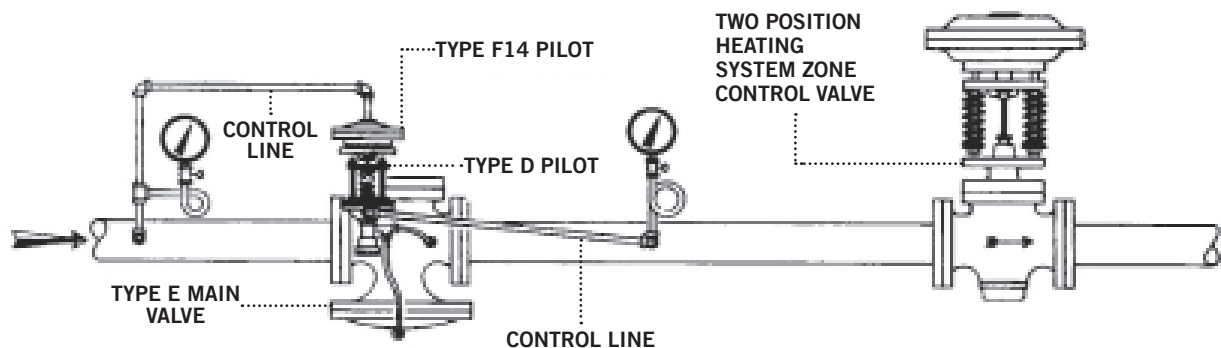

ADVANTAGES:

Only slight additional cost overpressure regulator alone.

Operates on small differential - does not allow large drop in boiler pressure.

Prevents “upsetting” boiler controls.

All standard equipment.


TYPE EQ BACK PRESSURE VALVE WITH FLOW CONTROL ORIFICE

APPLICATION:

To provide a valve that will limit flow and provide steam at a constant pressure.

OPERATION:

An orifice is sized for a known flow at a given pressure drop and is fitted in the upstream piping of the Back Pressure Valve. The Q pilot is set for the pressure required at the outlet of the orifice. If the pressure at the outlet of the orifice drops, the valve will start to close to maintain the pressure and flow.

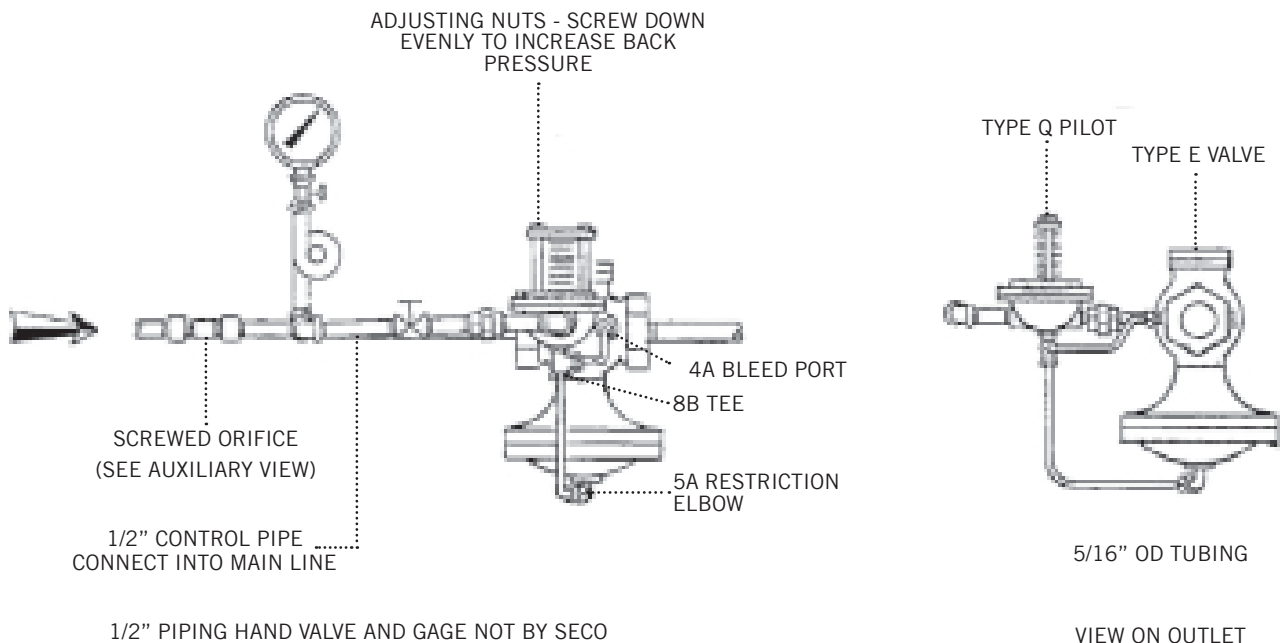

ADVANTAGES:

Standard Spence Valves.

Easily adjustable.


TYPE C34Q BACK PRESSURE PUMP BYPASS CONTROL

APPLICATION:

To maintain pump discharge pressure and insure constant circulation of water through pump.

OPERATION:

The Q pilot is set to open when pump discharge pressure raises, due to decreased need for water in system. The C34 will discharge excess water to return line.

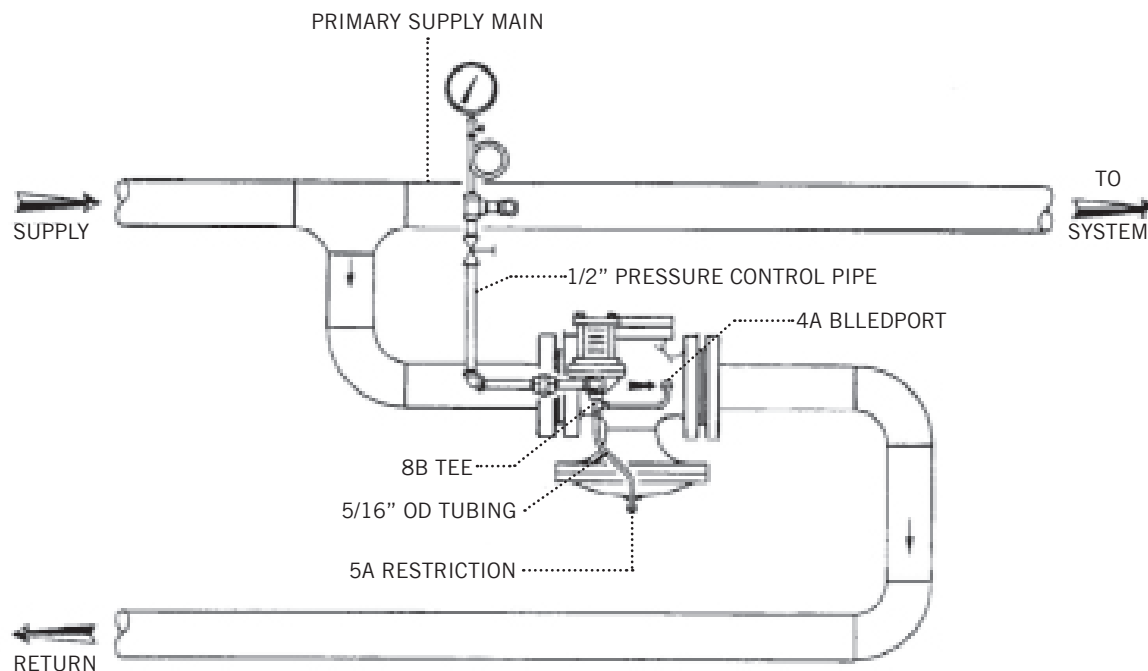

ADVANTAGES:

- Self operated.
- Balanced construction.
- High capacity.


TYPE EN DIFFERENTIAL REGULATOR

APPLICATION:

To regulate the atomizing steam pressure to an oil burner by pre-setting that amount higher than the oil pressure.

OPERATION:

The steam pressure under the diaphragm of the Type N Pilot is balanced by the oil pressure and the adjusting spring on top. Once set, the adjusting spring force is constant. Therefore, as the combustion control valve raises the oil pressure, the regulator raises the steam pressure until the pilot diaphragm is again in balance.

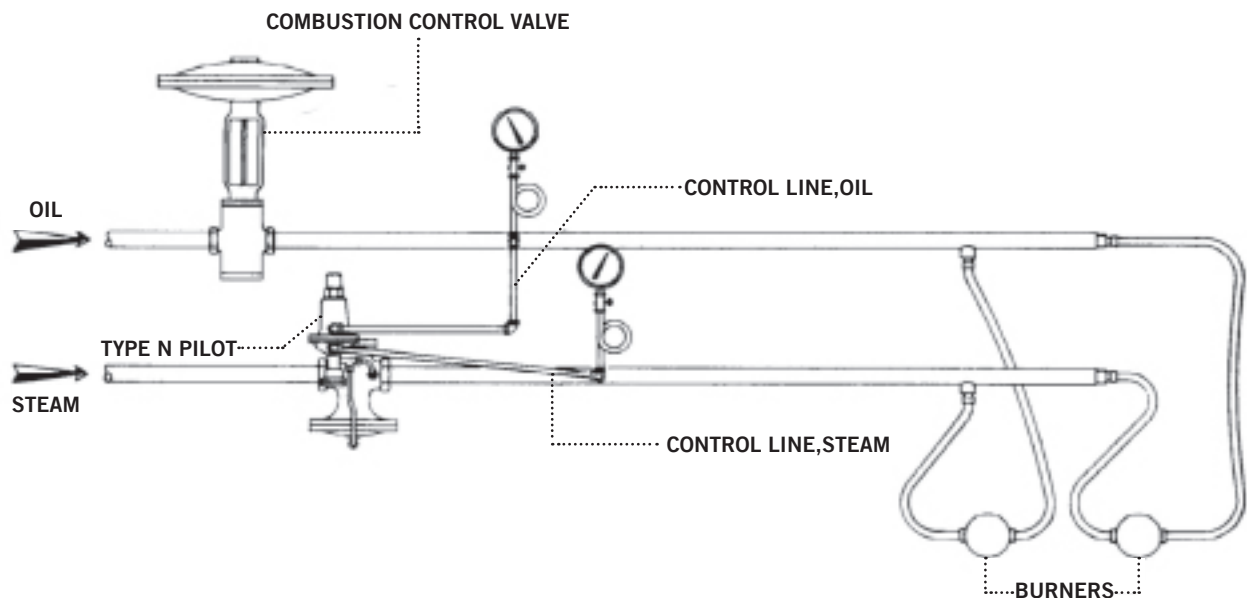

ADVANTAGES:

Accurate pilot control.

Valve can be balanced for greater rangeability.

Self contained.


TYPE N6 DIFFERENTIAL PRESSURE VALVE

APPLICATION:

To maintain pump discharge pressure at a constant differential above boiler steam pressure.

OPERATION:

The desired differential is made by the adjusting spring. The boiler feed pressure will then be maintained by the N6 at a constant pressure above the steam drum pressure by modulating the quantity of water by-passed to pump suction.

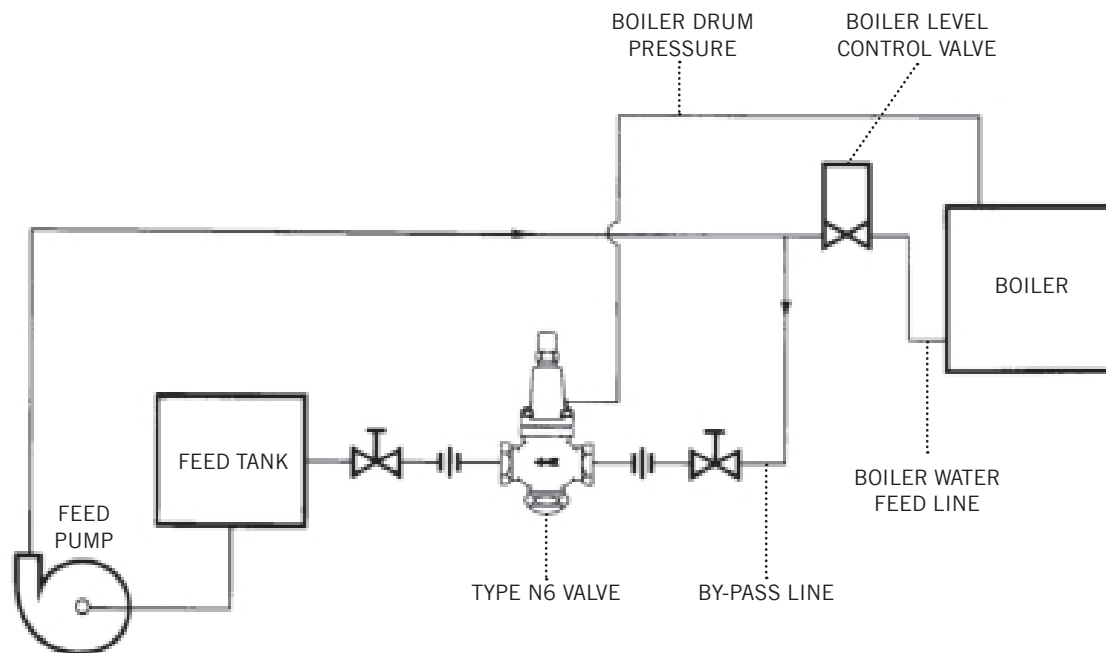

ADVANTAGES:

- Self contained.
- Easily adjustable.
- Stainless steel trim.

TYPE C34N


DIFFERENTIAL PRESSURE REGULATOR

APPLICATION:

To provide control of pressure drop across the boiler level regulator, when boiler is supplied by a motor driven centrifugal pump.

OPERATION:

As the demand for feedwater decreases and the level regulator throttles, the C34N also throttles, offsetting the increased pump discharge pressure and maintaining the inlet pressure to the level regulator at a constant differential over the boiler pressure. For high temperature water over 200°F., use E main valve instead of C34.

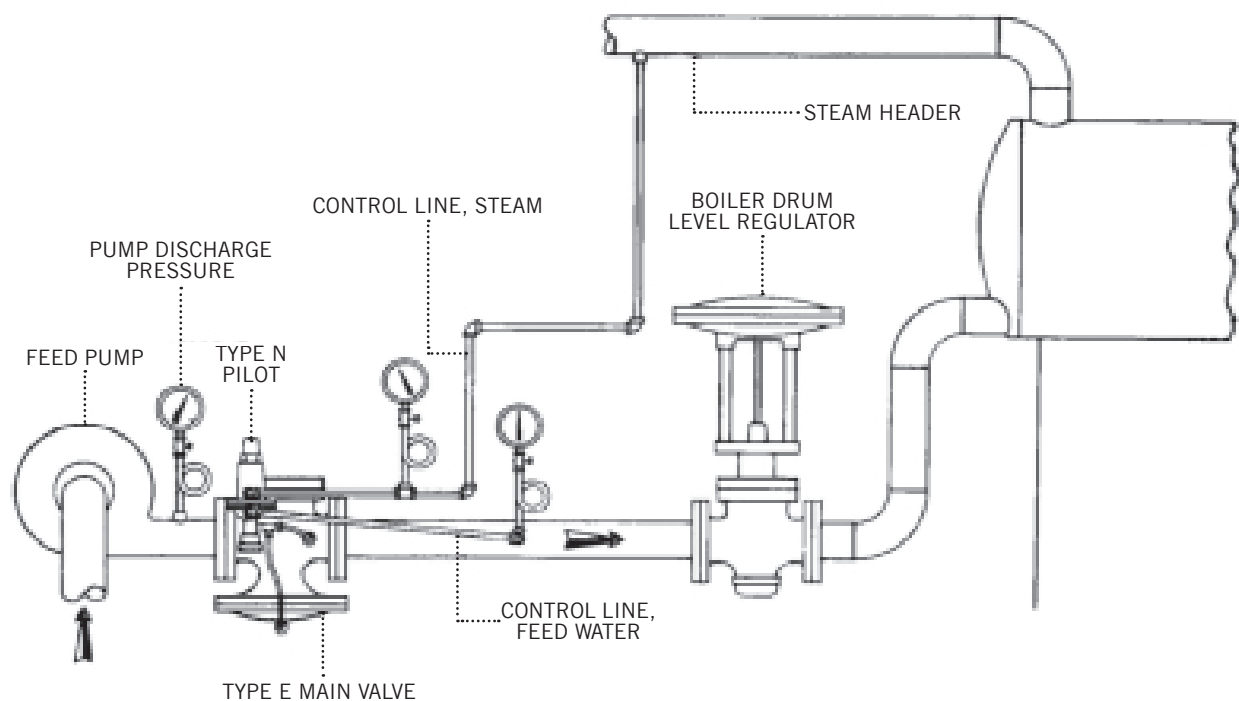

ADVANTAGES:

- Reduces maintenance on level regulator.
- Self operated.
- Accuracy of pilot operation.


TYPE C34N20 DIFFERENTIAL REGULATOR

APPLICATION:

To maintain a constant pressure differential across the terminal units of a chilled water system.

OPERATION:

The differential pressure across the system is adjusted by increasing or decreasing the spring compression on the N20 pilot. This spring force, plus the return line pressure, is balanced by the supply line pressure. A change in flow through the terminal units will be compensated by the C34 valve, with the result that the pressure drop across the system will be held at a constant value.

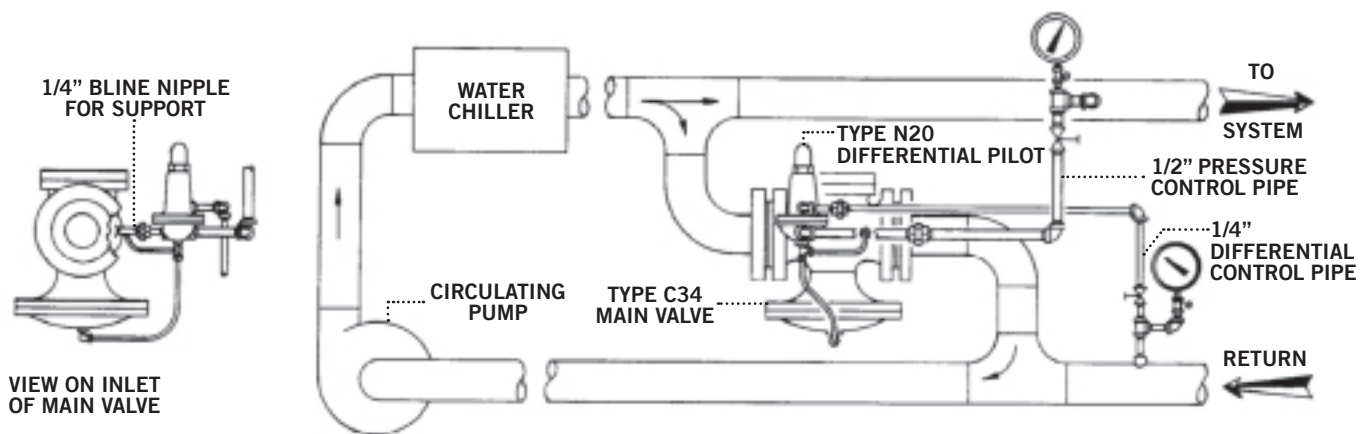

ADVANTAGES:

- Optimizes performance of terminal units and circulating pump.
- Prevents chiller freeze-up by maintaining continuous flow.
- Permits use of two-way rather than three-way valves at terminal units.
- Economical, self-contained unit.
- E valve may be used instead of C34.


TYPE EP14 PUMP GOVERNOR

APPLICATION:

To provide control of a steam pump discharge pressure feeding burners.

OPERATION:

Increase or decrease in pump discharge pressure throttles or opens the pilot, which in turn operates the main valve. Controlling the steam going to the cylinder keeps a constant oil pressure ahead of the combustion control valve for optimum performance.

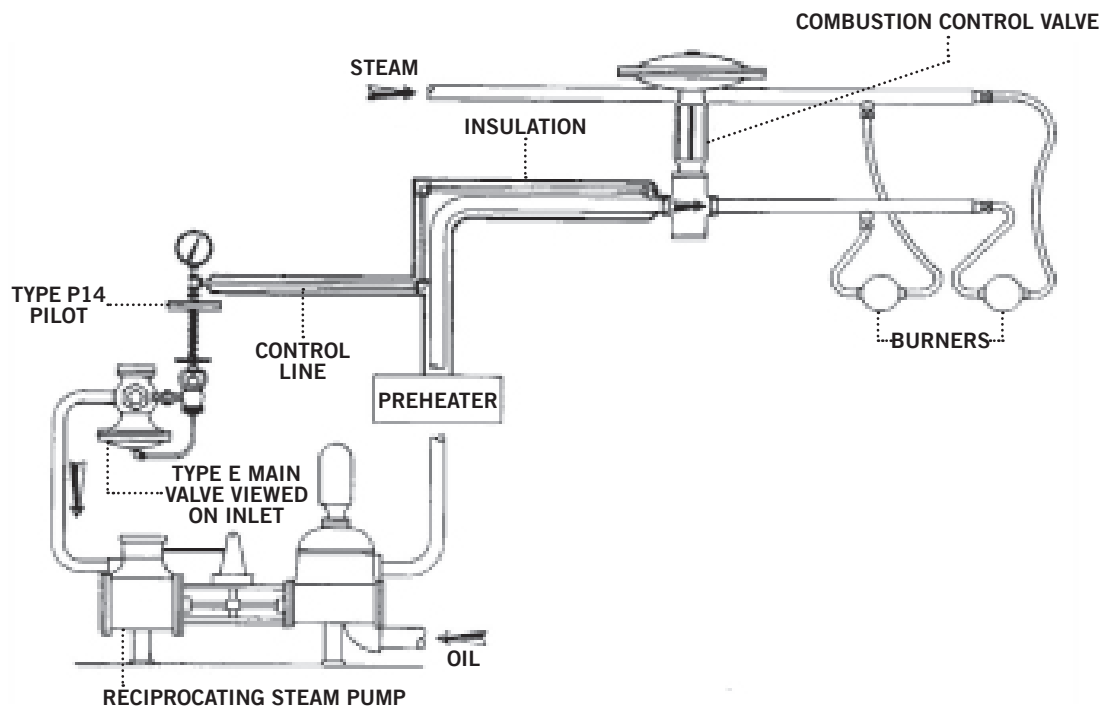

ADVANTAGES:

Pilot operation give close control through wide load range.

Pressure control at combustion control permits best performance of it.

Pressure pilot (Type D) can be added to make a Type EP14D regulator that puts a positive limit on chest pressure.


STEAM ATOMIZING AIR OPERATED DESUPERHEATER

APPLICATION:

Spence steam atomizing desuperheaters are designed to reduce and control the temperatures of superheated steam by the controlled injection of a cooling water mist.

OPERATION:

Water and steam are injected into a superheated steam line through the injector nozzle. The nozzle is designed to break the water into a fine mist to be easily absorbed by the oncoming steam. The flow through the nozzle is controlled by the dual control valve, and a pneumatic temperature controller.

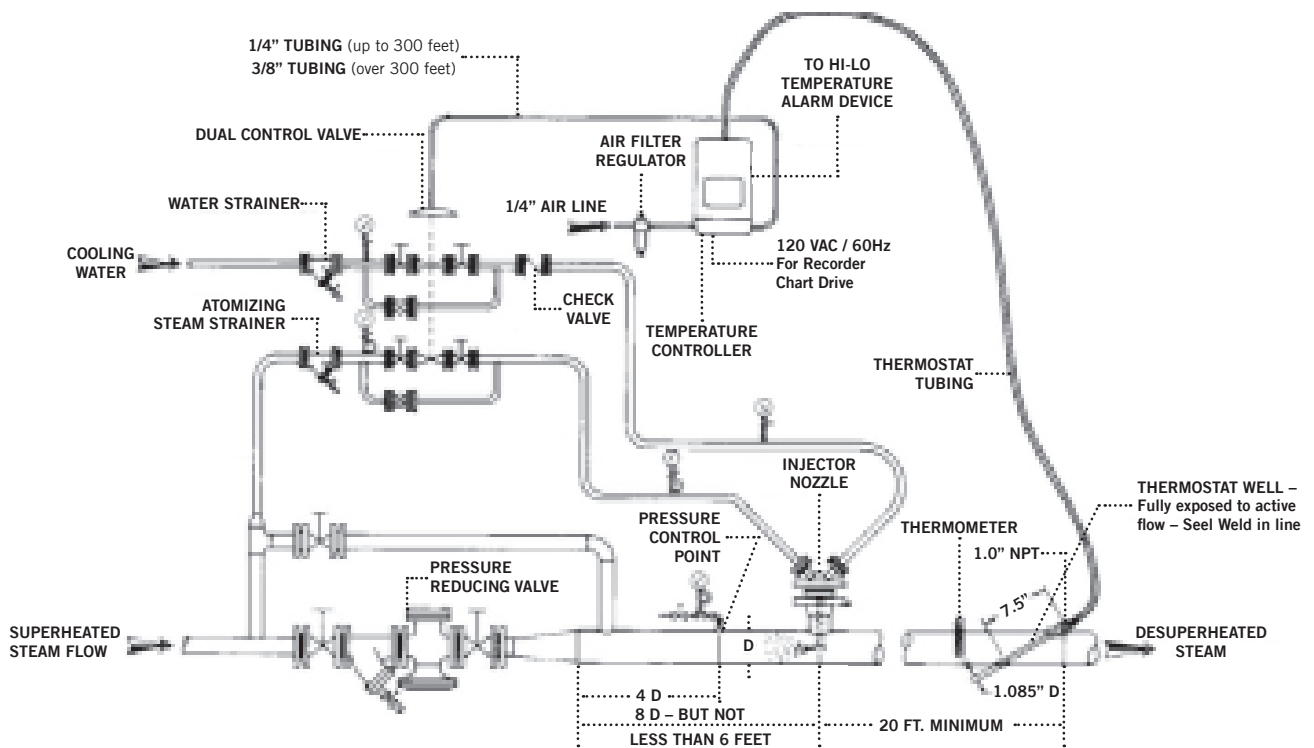

ADVANTAGES:

- Unique Dual Control Valve.
- Complete package by Spence.
- Spence Pressure Reducing Valve available.
- Many sizes available.


PRESSURE REGULATOR WITH MUFFLING ORIFICE

APPLICATION:

The Spence muffling orifice reduces the generation of pressure regulator noise at its source. It provides an economical means of attenuating high flow PRV noises by 6 - 20 dBA.

OPERATION:

The muffling orifice consists of a steel plate with primary orifices, to which is welded a stainless steel plate with secondary orifices. The plate is installed in the expanded downstream piping, and creates the desired back pressure on the PRV for maximum attenuation.

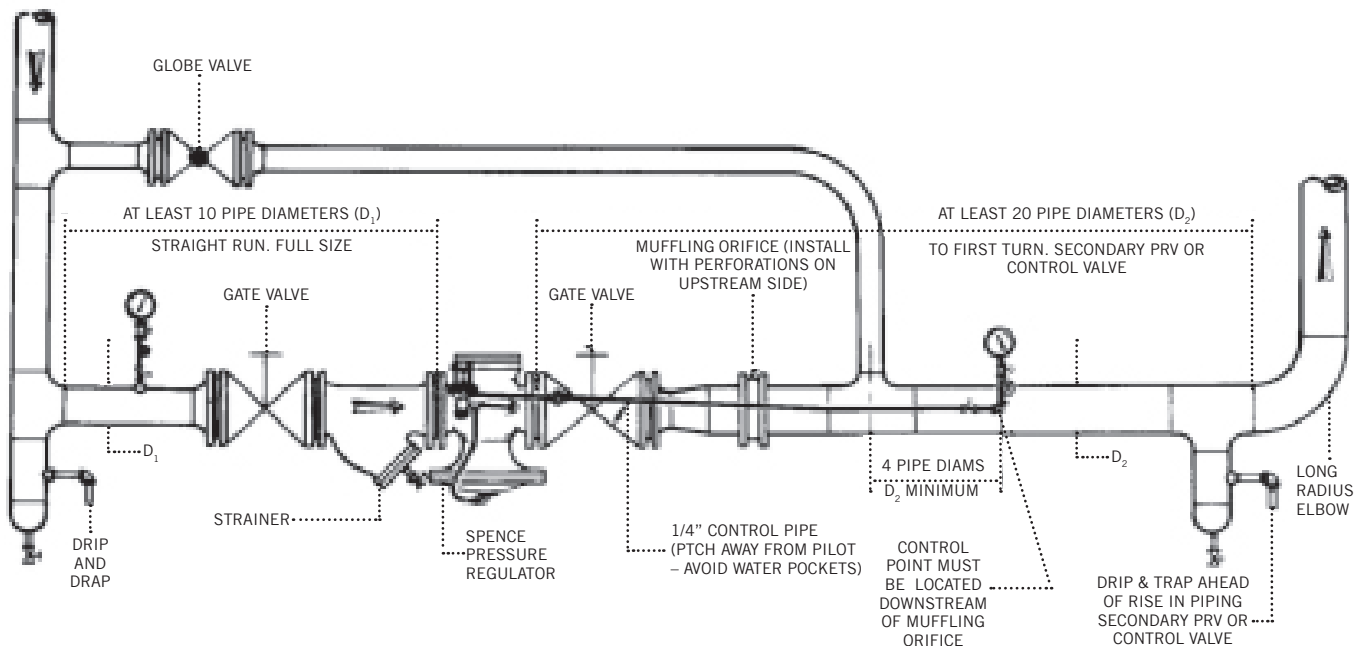

ADVANTAGES:

- Inexpensive.
- Maintenance free.
- Capacity of valve not reduced.
- Ease of installation.


PRESSURE REGULATOR WITH NOISE SUPPRESSOR

APPLICATION:

The Spence Noise Suppressor is designed to attenuate the noise generated by a pressure reducing station. These devices are particularly effective in limiting the propagation of valve-generated noise into the downstream piping. Being of the dissipative reactive type, they are effective over a broad frequency band (up to 12,000 Hz). Depending upon flow and piping configuration, noise attenuation of up to 20 decibels is obtainable.

OPERATION:

Installed at the reducing valve outlet, the required pipeline expansion takes place within the noise suppressor. This expanded outlet feature eliminates the expense and noise often associated with separate expansion fittings. A reflector assembly improves performance by increasing the interaction of flow and acoustic material. The straight through design minimizes pressure drop, permitting normal valve sizing.

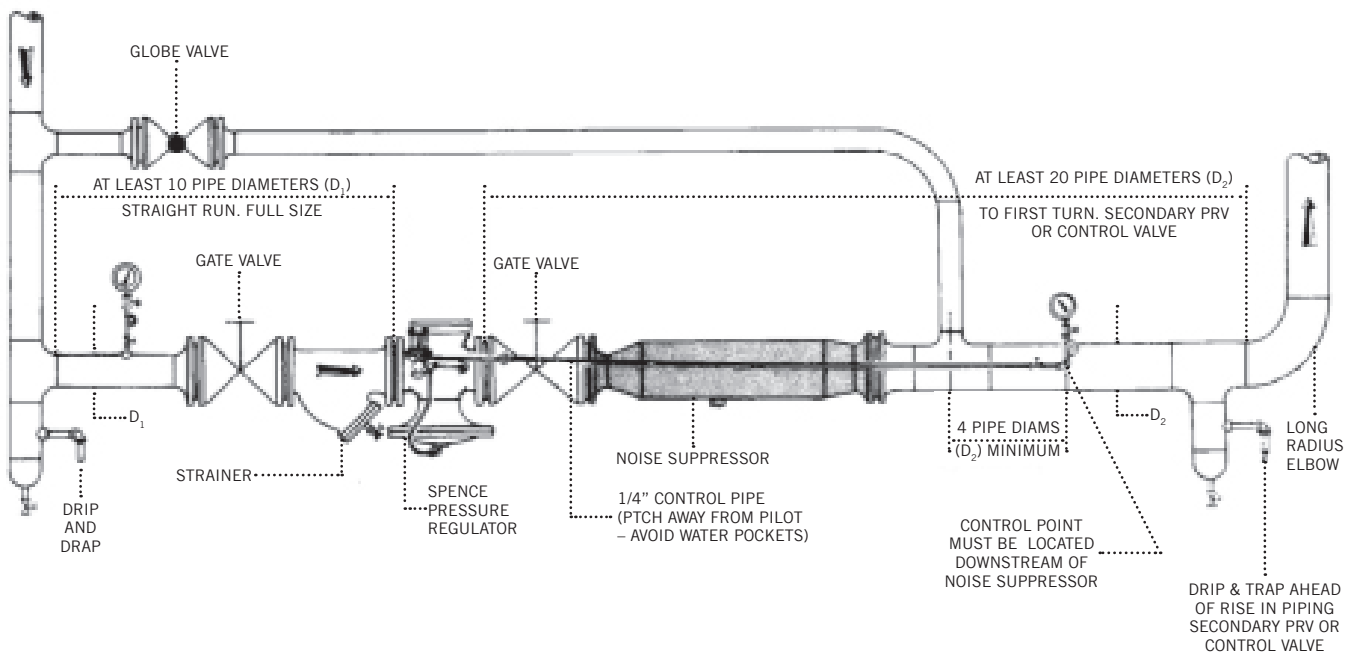

ADVANTAGES:

Maintenance free.

Standard Spence valves used.

Capacity of valve not reduced.

TYPE J CONTROL VALVE AND LIQUID LEVEL CONTROLLER FOR BOILERS

APPLICATION:


To provide water to a boiler at all times, even if water in condensate tank falls too low.

OPERATION:

As the level in the condensate receiver increases, an output signal from the pilot controller causes the number one J control valve to open and the number two control valve (make-up) to close.

As the level continues to increase, valve number one fully opens, admitting water from the condensate receiver to the boiler feed pump, valve two simultaneously closes, cutting off the soft water make-up supply.

Should the level in the condensate receiver decrease, reverse action of the above occurs and, at low level, all water to the boiler feed pump is obtained from the soft water make-up supply.

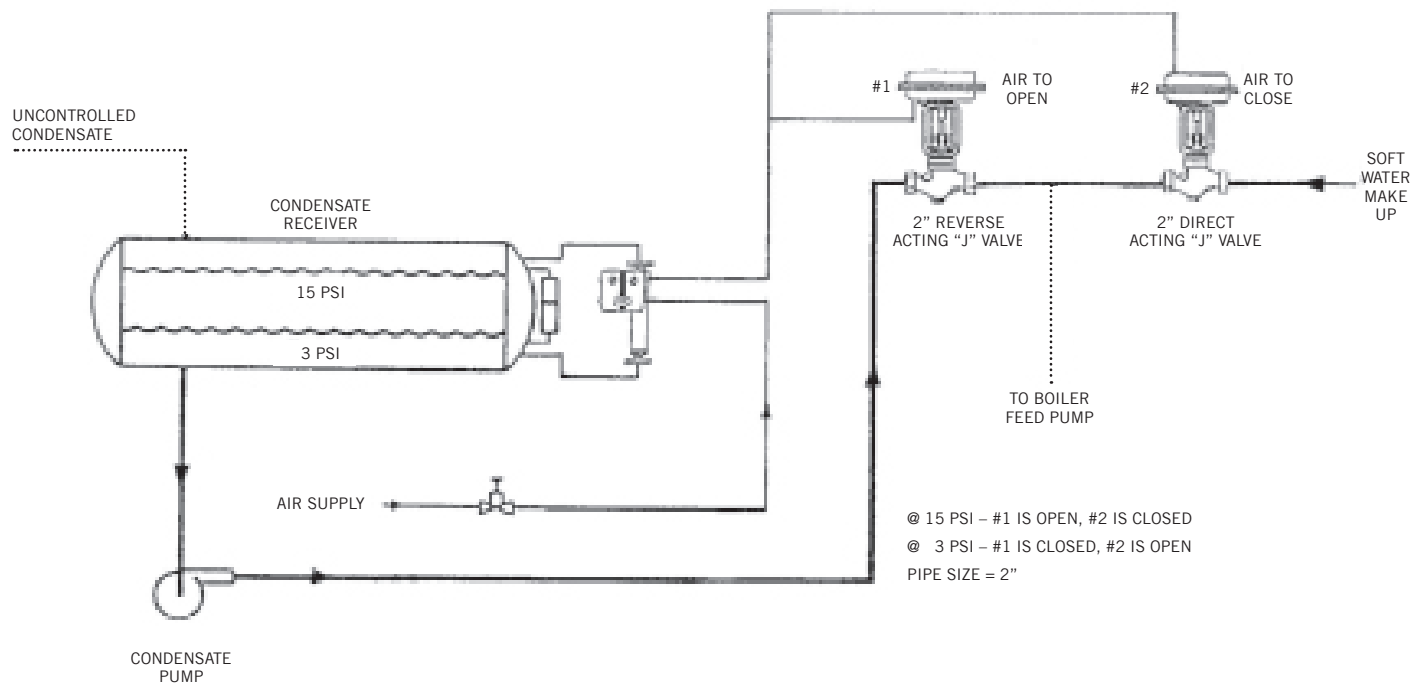


TYPE J CONTROL VALVE WITH ELECTRO-PNEUMATIC POSITIONER FOR COMPUTERIZED COGENERATION CONTROL

APPLICATION:

To interface either a computerized cogeneration control, or electronic controller, to a turbine exhaust make-up valve in order to control the generating turbine's exhaust pressure and flow for secondary steam usage.

OPERATION:

A pre-programmed computer, or electronic controller receiving a 4-20 MA signal from a P/I Transmitter, is used as the controlling device for a Type J Control Valve with an electro-pneumatic positioner opening the by-pass line to the extent necessary to maintain the desired operating conditions.

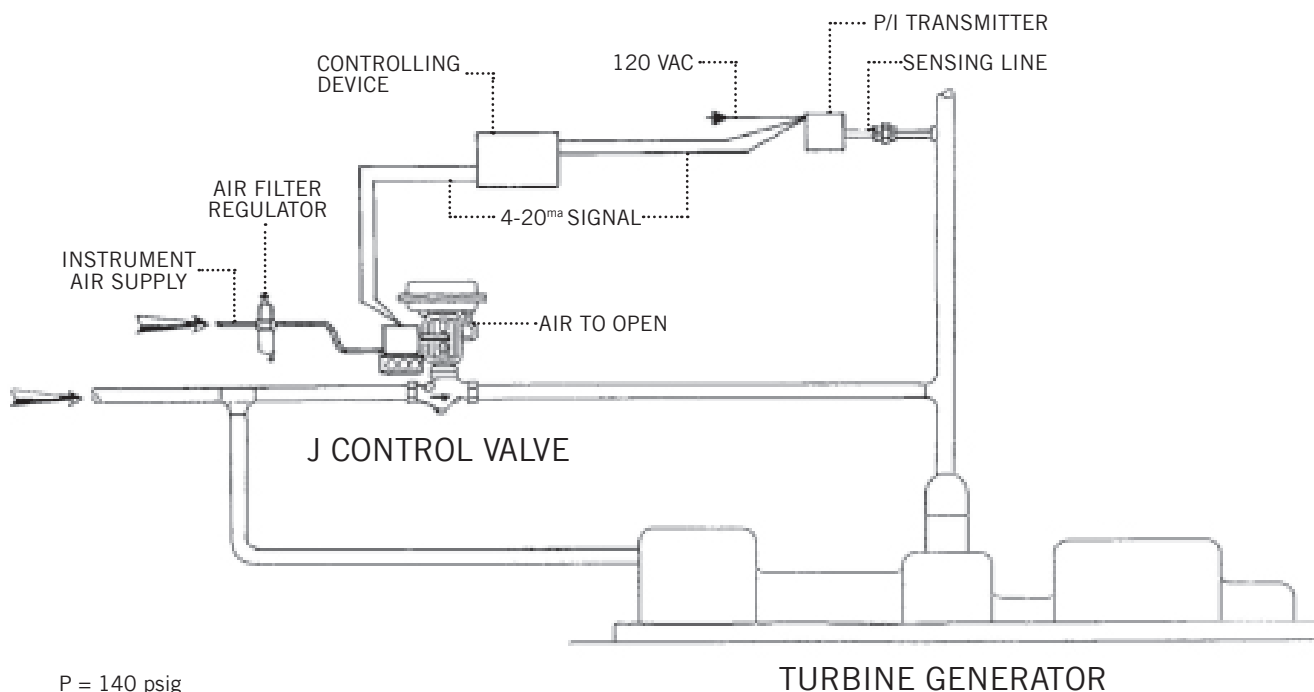

P = 140 psig

P¹ = 17 psig

W² = 8000 lbs/hr

2" J Valve, 1 3/4" Port


TYPE J CONTROL VALVE FOR LEVEL/MAKE-UP ON A DEAERATOR

APPLICATION:

When insufficient condensate to meet the demand for boiler feedwater is returned to the deaerator, the make-up water control valve is opened to satisfy this requirement.

OPERATION:

When the Deaerator's Pneumatic Level Controller senses low water level, it sends a proportional 3 to 15 psia pneumatic signal to the Type 'J' Control Valve. The Type 'J' Control Valve responds by opening, closing or modulating the flow of raw make-up water into the Deaerator, thereby satisfying the demand for boiler feedwater.

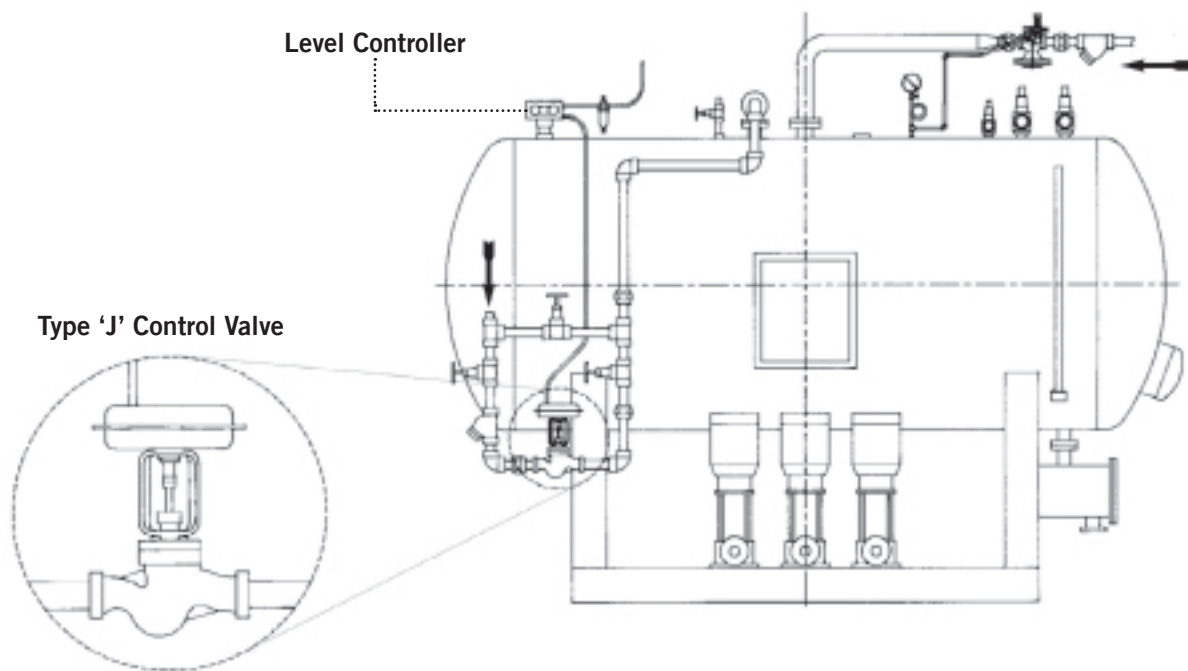

ADVANTAGES:

Precise control of make-up water

The standard modified equal percent plug contour provides superior throttling action

This image shows a full page of white paper with horizontal dotted lines. The lines are evenly spaced and run across the width of the page, providing a guide for handwriting practice. There are no margins, text, or other markings on the page.

SECTION V REFERENCE & PIPING DESIGN

GLOSSARY OF TERMS

REPRINTED COURTESY FLUID CONTROLS INSTITUTE

PRESSURE REGULATOR - A self-operated device, either pilot or direct operated, in which power to position the valve closure member is provided by the pressure of the controlled variable.

PRESSURE REDUCING REGULATOR - A device that controls and responds to changes in its outlet pressure.

BACK PRESSURE REGULATOR - A device that controls and responds to change in its inlet pressure.

DIFFERENTIAL PRESSURE REGULATOR - A device that maintains a constant differential pressure between a reference pressure and the pressure of the controlled fluid.

PUMP PRESSURE REGULATOR - A device that controls the speed of a pump in response to changes in pump discharge pressure.

TEMPERATURE REGULATOR - A self operated device in which the energy to position valve closure member(s) is provided by changes of temperature energy of the controlled variable.

DIRECT OPERATED - A regulator that uses a temperature thermal system to directly provide the power to move the plug.

PILOT OPERATED - A regulator that uses a temperature thermal system to power a pilot mechanism which generates an amplified signal to position the plug of the regulator. The pilot may be internal or external.

PRESSURE TEMPERATURE - A dual function piloted regulator combining the control of both temperature and pressure. Control of pressure and temperature may be by a single pilot or multiple pilots. Pilot(s) may be internal or external or these functions in combination may be available.

DIAPHRAGM ACTUATED REGULATOR - A regulator utilizing a diaphragm as the position actuator.

ACCURACY OF REGULATION is the value of controlled variable (pressure, or differential pressure) expressed as a percentage of the set value (at minimum controllable flow) when with a constant supply pressure the flow through the regulator is increased from the minimum controllable flow to the rated capacity (also equal to 100% minus the offset (drop) %).

MINIMUM CONTROLLABLE FLOW is the lowest flow at which a steady regulated condition of the controlled variable can be maintained.

FLOW COEFFICIENT (Cv) is the regulator capacity in GPM of H₂O at 20 degrees C with one PSI pressure drop at full rated travel. Refer to ISA S75.01 and S75.02 for Testing Procedures and Sizing Equations.

DEAD BAND - The range through which the controlled variable can reverse direction without and observable regulator response.

REPEATABILITY - Ability to return to any defined point within stated limits of regulation within a specified tolerance.

DRIFT - A change in set point over an extended period of time.

REVERSE ACTION - A regulator that increases its output as the measured variable increases.

DIRECT ACTION - A regulator that decreases its output as the measured variable increases.

PACKLESS - A construction that does not employ a dynamic seal isolating internal fluid from ambient or atmosphere.


BALANCED - A regulator style featuring a pressure balanced plug. May be single or double seated.

UNBALANCED - A regulator where the plug closure member is not pressure balanced. Generally a single regulator.

DROOP - See accuracy of regulation.

FLOW VS. VELOCITY CHART

(Specific Gravity of 1)

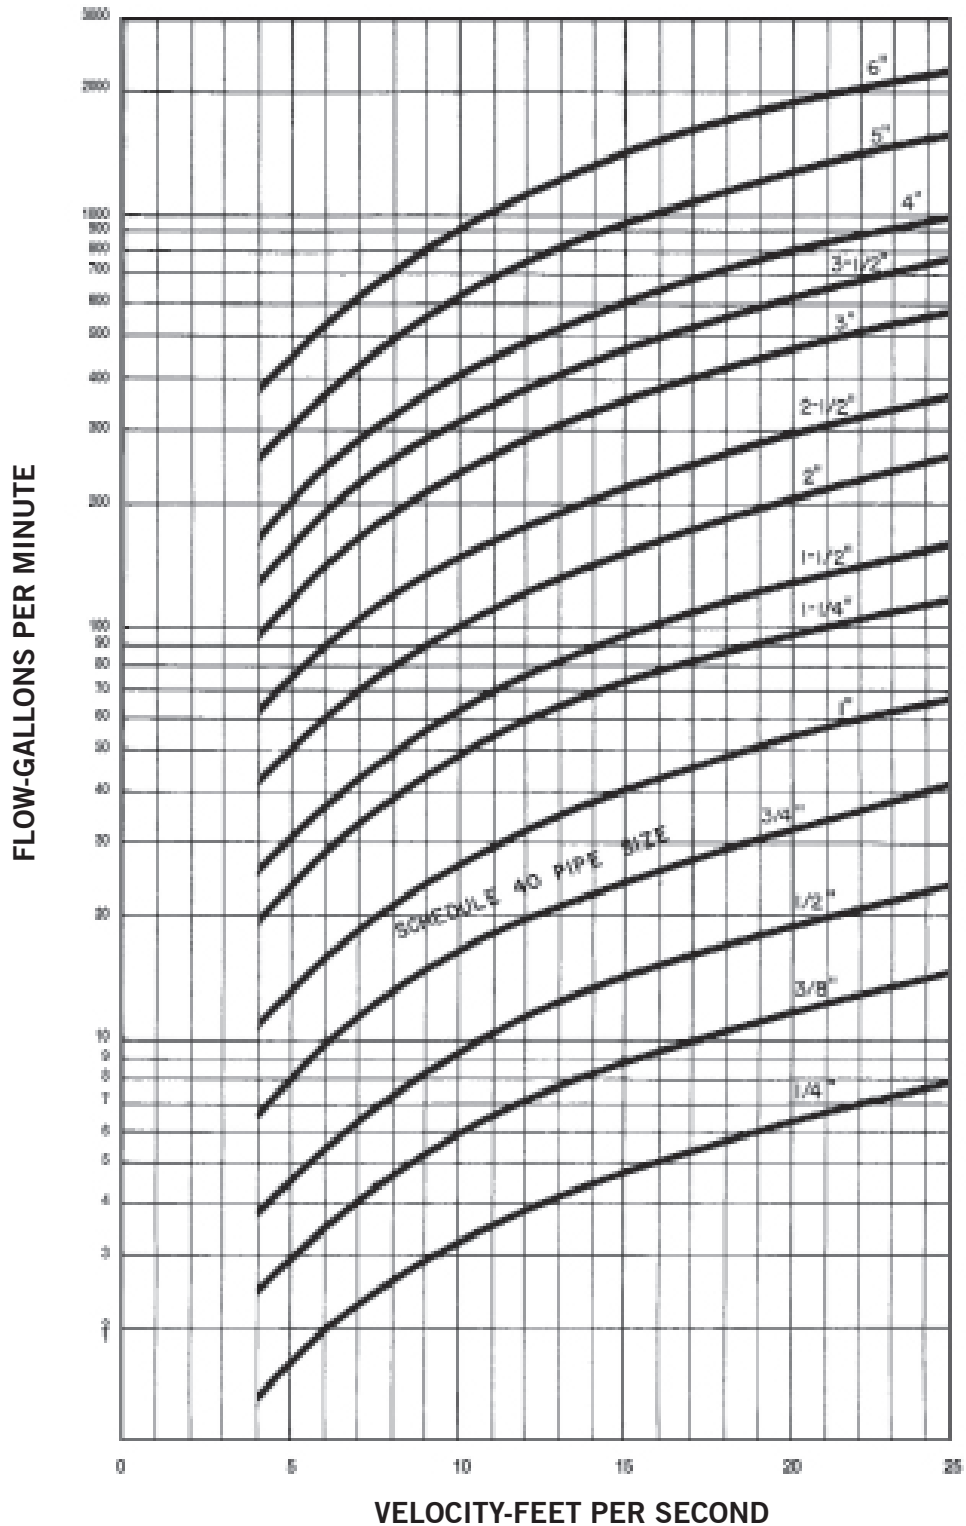

FLANGE STANDARDS

125 lb. CAST IRON

ANSI STANDARD B16.1

Pipe Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
Diameter of Flange	—	—	4 1/4	4 5/8	5	6	7	7 1/2	8 1/2	9	10	11	13 1/2	16	19
Thickness of Flange (min) ^a	—	—	7/16	1/2	9/16	5/8	1 1/16	3/1	13/16	15/16	15/16	1	1 1/8	13/16	1 1/1
Diameter of Bolt Circle	—	—	3 1/8	3 1/2	3 7/8	4 3/4	5 1/2	6	7	7 1/2	8 1/2	9 1/2	11 3/4	14 1/4	17
Number of Bolts	—	—	4	4	4	4	4	4	8	8	8	8	8	12	12
Diameter of Bolts	—	—	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8	3/4	3/4	3/4	7/8	7/8

^a 125 lb. cast iron flanges have plain faces.

250 lb. CAST IRON

ANSI STANDARD B16.1

Pipe Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
Diameter of Flange	—	—	4 7/8	5 1/4	6 1/8	6 1/2	7 1/2	8 1/4	9	10	11	12 1/2	15	17 1/2	20 1/2
Thickness of Flange (min) ^b	—	—	11/16	3/4	13/16	7/8	1	1 1/8	1 3/16	1 1/4	1 3/8	1 7/16	1 5/8	1 7/8	2
Diameter of Raised Face	—	—	2 11/16	3 1/16	3 9/16	4 3/16	4 15/16	5 11/16	6 5/16	6 15/16	8 5/16	9 11/16	11 15/16	14 1/6	16 7/16
Diameter of Bolt Circle	—	—	3 1/2	3 7/8	4 1/2	5	5 7/8	6 5/8	7 1/4	7 1/8	9 1/4	10 5/8	13	15 1/4	17 3/4
Number of Bolts	—	—	4	4	4	8	8	8	8	8	8	12	12	16	16
Diameter of Bolts	—	—	5/8	5/8	3/4	5/8	3/4	3/4	3/4	3/4	3/4	3/4	7/8	1	1 1/8

^b 250 lb. cast iron flanges have a 1/16" raised face which is included in the flange thickness dimensions.

150 lb. BRONZE

ANSI STANDARD B16.24

Pipe Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
Diameter of Flange	3 1/2	3 7/8	4 1/4	4 5/8	5	6	7	7 1/2	8 1/2	9	10	11	13 1/2	16	19
Thickness of Flange (min) ^c	5/16	11/32	3/8	13/32	7/16	1/2	9/16	5/8	11/16	11/16	3/4	13/16	15/16	1	1 1/16
Diameter of Bolt Circle	2 3/8	2 3/4	3 1/8	3 1/2	3 7/8	4 3/4	5 1/2	6	7	7 1/2	8 1/2	9 1/2	11 3/4	14 1/4	17
Number of Bolts	4	4	4	4	4	4	4	4	8	8	8	8	8	12	12
Diameter of Bolts	1/2	1/2	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8	3/4	3/4	3/4	7/8	7/8

^c 150 lb. bronze flanges have plain faces with two concentric gasket-retaining grooves between the port and the bolt holes.

300 lb. BRONZE

ANSI STANDARD B16.24

Pipe Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
Diameter of Flange	3 3/4	4 5/8	4 7/8	5 1/4	6 1/2	6 1/2	7 1/2	8 1/4	9	10	11	12 1/2	15	—	—
Thickness of Flange (min) ^d	1/2	17/32	19/32	5/8	11/16	3/4	13/16	29/32	31/32	1 1/16	11/8	1 3/16	1 3/8	—	—
Diameter of Bolt Circle	2 5/8	3 1/4	3 1/2	3 7/8	4 1/2	5	5 7/8	6 5/8	7 1/4	7 7/8	9 1/4	10 5/8	13	—	—
Number of Bolts	4	4	4	4	4	8	8	8	8	8	8	12	12	—	—
Diameter of Bolts	1/2	5/8	5/8	5/8	3/4	5/8	3/4	3/4	3/4	3/4	3/4	3/4	7/8	—	—

^d 300 lb. bronze flanges have plain faces with two concentric gasket-retaining grooves between the port and the bolt holes.

150 lb. STEEL

ANSI STANDARD B16.5

Pipe Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
Diameter of Flange	—	—	4	4 5/8	5	6	7	7 1/2	8 1/2	9	10	11	13 1/2	16	19
Thickness of Flange (min) ^e	—	—	7/16	1/2	9/16	5/8	11/16	3/4	13/16	15/16	15/16	1	1 1/8	1 3/16	1 1/4
Diameter of Raised Face	—	—	2	2 1/2	2 7/8	3 5/8	4 1/8	5	5 1/2	6 3/16	7 5/16	8 1/2	10 5/8	12 3/4	15
Diameter of Bolt Circle	—	—	3 1/8	3 1/2	3 7/8	4 3/4	5 1/2	6	7	7 1/2	8 1/2	9 1/2	11 3/4	14 1/4	17
Number of Bolts	—	—	4	4	4	4	4	4	8	8	8	8	8	12	12
Diameter of Bolts	—	—	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8	3/4	3/4	3/4	7/8	7/8

^e 150 lb. steel flanges have a 1/16" raised face which is included in the flange thickness dimensions.

300 lb. STEEL

ANSI STANDARD B16.5

Pipe Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
Diameter of Flange	—	—	4 7/8	5 1/4	6 1/8	6 1/2	7 1/2	8 1/4	9	10	11	12 1/2	15	17 1/2	20 1/2
Thickness of Flange (min) ^f	—	—	11/16	3/4	13/16	7/8	1	1 1/8	1 3/16	1 1/4	1 3/8	1 7/16	1 5/8	1 7/8	2
Diameter of Raised Face	—	—	2	2 1/2	2 7/8	3 5/8	4 1/8	5	5 1/2	6 3/16	7 5/16	8 1/2	10 5/8	12 3/4	15
Diameter of Bolt Circle	—	—	3 1/2	3 7/8	4 1/2	5	5 7/8	6 5/8	7 1/4	7 7/8	9 1/4	10 5/8	13	15 1/4	17 3/4
Number of Bolts	—	—	4	4	4	8	8	8	8	8	8	12	12	16	16
Diameter of Bolts	—	5/8	5/8	3/4	5/8	3/4	3/4	3/4	3/4	3/4	3/4	3/4	7/8	1	1 1/8

^f 300 lb. steel flanges have a 1/16" raised face which is included in the flange thickness dimensions.

400 lb. STEEL

ANSI STANDARD B16.5

Pipe Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
Diameter of Flange	3 3/4	4 5/8	4 7/8	5 1/4	6 1/8	6 1/2	7 1/2	8 1/4	9	10	11	12 1/2	15	17 1/2	20 1/2
Thickness of Flange (min) ^g	9/16	5/8	11/16	13/16	7/8	1	1 1/8	1 1/4	1 3/8	1 3/8	1 1/2	1 5/8	1 7/8	2 1/8	2 1/4
Diameter of Raised Face	1/38	1 11/16	2	2 1/2	2 7/8	3 5/8	4 1/8	5	5 1/2	6 3/16	7 5/16	8 1/2	10 5/8	12 3/4	15
Diameter of Bolt Circle	25/8	31/4	3 1/2	3 7/8	4 1/2	5	5 7/8	6 5/8	7 1/4	7 7/8	9 1/4	10 5/8	13	15 1/4	17 3/4
Number of Bolts	4	4	4	4	4	8	8	8	8	8	8	12	12	16	16
Diameter of Bolts	1/2	5/8	5/8	5/8	3/4	5/8	3/4	3/4	7/8	7/8	7/8	7/8	1	1 1/8	1 1/4

^g 400 lb. steel flanges have a 1/4" raised face which is included in the flange thickness dimensions.

600 lb. STEEL

ANSI STANDARD B16.5

Pipe Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
Diameter of Flange	3 3/4	4 5/8	4 7/8	5 1/4	6 1/8	6 1/2	7 1/2	8 1/4	9	10 3/4	13	14	16 1/2	20	22
Thickness of Flange (min) ^h	9/16	5/8	11/16	13/16	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 3/4	1 7/8	2 3/16	2 1/2	2 5/8
Diameter of Raised Face	1 3/8	1 11/16	2	2 1/2	2 7/8	3 5/8	4 1/8	5	5 1/2	6 3/16	7 5/16	8 1/2	10 5/8	12 3/4	15
Diameter of Bolt Circle	2 5/8	3 1/4	3 1/2	3 7/8	4 1/2	5	5 7/8	6 5/8	7 1/4	8 1/2	10 1/2	11 1/2	13 3/4	17	19 1/4
Number of Bolts	4	4	4	4	4	8	8	8	8	8	8	12	12	16	20
Diameter of Bolts	1/2	5/8	5/8	5/8	3/4	5/8	3/4	3/4	7/8	7/8	1	1	1 1/8	1 1/4	1 1/4

^h 600 lb. steel flanges have a 1/4" raised face which is included in the flange thickness dimensions

CONVERSION TABLES

LIQUID WEIGHTS and MEASURES		
To Convert	To	Multiply By
Gallons	Liters	3.7853
Gallons	Cu. Inches	231
Gallons	Cu. Feet Cu.	0.1337
Gallons	Meters Lbs. of	0.00379
Gallons	Water	8.339
Liters	Gallons	0.26418
Liters	Cu. Inches	61.025
Liters	Cu. Feet	0.0353
Liters	Cu. Meters	0.001
Liters	Lbs. of Water	2.202
Cu. Inches	Gallons	0.00433
Cu. Inches	Liters	0.01639
Cu. Inches	Cu. Feet	0.00058
Cu. Inches	Cu. Meters	0.000016
Cu. Inches	Lbs. of Water	0.0362
Cu. Feet	Gallons	7.48052
Cu. Feet	Liters	28.316
Cu. Feet	Cu. Inches	1728
Cu. Feet	Cu. Meters	0.0283
Cu. Feet	Lbs. of Water	0.0283
Cu. Meters	Gallons	264.17
Cu. Meters	Liters	999.972
Cu. Meters	Cu. Inches	61023.74
Cu. Meters	Cu. Feet	35.3145
Cu. Meters	Lbs. of Water	2202.61
Lbs. of Water	Gallons	0.11992
Lbs. of Water	Liters	0.45419
Lbs. of Water	Cu. Inches	27.643
Lbs. of Water	Cu. Feet	0.01603
Lbs. of Water	Cu. Meters	0.000454
LINEAL MEASURES		
Inches	mm	25.4
Inches	cm	2.54
Inches	Meters	0.0254
Feet	cm	30.48
Feet	Meters	0.3048
mm	Inches	0.03937
mm	Feet	0.00328
cm	Inches	0.3937
cm	Feet	0.03281
Meters	Feet	3.28
AREA		
Sq. Inches	Sq. Feet	0.006944
Sq. Inches	Sq. cm	6.4516
Sq. Feet	Sq. Inches	144
Sq. Feet	Sq. cm	929.03
Sq. Feet	Sq. Meters	0.0929
Sq. cm	Sq. Inches	0.155
Sq. cm	Sq. Feet	0.00108
Sq. cm	Sq. Meters	0.0001
Sq. Meter	Sq. Inches	1550
Sq. Meter	Sq. Feet	10.76

LIQUID WEIGHTS and MEASURES					
To Convert	To	Multiply By	To Convert	To	Multiply By
Lbs. per Sq. In.	Lbs. per Sq. Ft.	144	Ins. of Mercury	Lbs. per Sq. In.	0.491154
Lbs. per Sq. In.	Atmospheres	0.06805	Ins. of Mercury	Lbs. per Sq. Ft.	70.7262
Lbs. per Sq. In.	Ins. of Water	27.728	Ins. of Mercury	Atmospheres	0.033421
Lbs. per Sq. In.	Ft. of Water	2.3106	Ins. of Mercury	Ins. of Water	13.6185
Lbs. per Sq. In.	Ins. of Mercury	2.03602	Ins. of Mercury	Ft. of Water	1.1349
Lbs. per Sq. In.	mm of Mercury	51.715	Ins. of Mercury	mm of Mercury	25.40005
Lbs. per Sq. In.	Bar	0.06895	Ins. of Mercury	Bar	0.033864
Lbs. per Sq. In.	kg per Sq. cm	0.070307	Ins. of Mercury	kg per Sq. cm	0.03453
Lbs. per Sq. In.	kg per Sq. M	703.070	Ins. of Mercury	kg per Sq. M	345.316
Lbs. per Sq. Ft.	Lbs. per Sq. In.	0.0069445	mm of Mercury	Lbs. per Sq. In.	0.019337
Lbs. per Sq. Ft.	Atmospheres	0.000473	mm of Mercury	Lbs. per Sq. Ft.	2.7845
Lbs. per Sq. Ft.	Ins. of Water	0.1926	mm of Mercury	Atmospheres	0.001316
Lbs. per Sq. Ft.	Ft. of Water	0.01605	mm of Mercury	Ins. of Water	0.53616
Lbs. per Sq. Ft.	Ins. of Mercury	0.014139	mm of Mercury	Ft. of Water	0.04468
Lbs. per Sq. Ft.	mm of Mercury	0.35913	mm of Mercury	Ins. of Mercury	0.03937
Lbs. per Sq. Ft.	Bar	0.000479	mm of Mercury	Bar	0.00133
Lbs. per Sq. Ft.	kg per Sq. cm	0.000488	mm of Mercury	kg per Sq. cm	0.00136
Lbs. per Sq. Ft.	kg per Sq. M	4.88241	mm of Mercury	kg per Sq. M	13.59509
Atmospheres	Lbs. per Sq. In.	14.696	kg per Sq. cm	Lbs. per Sq. In.	14.2233
Atmospheres	Lbs. per Sq. Ft.	2116.22	kg per Sq. cm	Lbs. per Sq. Ft.	2048.155
Atmospheres	Ins. of Water	407.484	kg per Sq. cm	Atmospheres	0.96784
Atmospheres	Ft. of Water	33.957	kg per Sq. cm	Ins. of Water	394.38
Atmospheres	Ins. of Mercury	29.921	kg per Sq. cm	Ft. of Water	32.865
Atmospheres	mm of Mercury	760	kg per Sq. cm	Ins. of Mercury	28.959
Atmospheres	Bar	1.01325	kg per Sq. cm	mm of Mercury	735.559
Atmospheres	kg per Sq. cm	1.0332	kg per Sq. cm	Bar	0.98067
Atmospheres	kg per Sq. M	10332.27	kg per Sq. cm	kg per Sq. M	10000
Ins. of Water	Lbs. per Sq. In.	0.03609	Note: All weights and measures of water are based on temperature of 60°F.		
Ins. of Water	Lbs. per Sq. Ft.	5.1972			
Ins. of Water	Atmospheres	0.002454	Note: Temperature of Water and Mercury is 68°F and 32°F respectively.		
Ins. of Water	Ft. of Water	0.08333			
Ins. of Water	Ins. of Mercury	0.07343	TEMPERATURE		
Ins. of Water	mm of Mercury	1.8651			
Ins. of Water	Bar	0.00249	To convert Fahrenheit to Celsius: $^{\circ}\text{F} - \frac{32}{1.8}$		
Ins. of Water	kg per Sq. cm	0.00253			
Ins. of Water	kg per Sq. M	25.375	To convert Celsius to Fahrenheit: $(1.8 \times ^{\circ}\text{C}) + 32$		
Ft. of Water	Lbs. per Sq. In.	0.432781			
Ft. of Water	Lbs. per Sq. Ft.	63.3205	VELOCITY		
Ft. of Water	Atmospheres	0.029449			
Ft. of Water	Ins. of Water	12	1 Ft per Sec. = 0.3048 M Per Sec.		
Ft. of Water	Ins. of Mercury	0.88115			
Ft. of Water	mm of Mercury	22.3813	1 M per Sec. = 3.2808 Ft. per Sec.		
Ft. of Water	Bar	0.029839			
Ft. of Water	kg per Sq. cm	0.03043			
Ft. of Water	kg per Sq. M	304.275			

PRESSURE TO VACUUM PROPERTIES OF WATER

Gage Indicated		ABSOLUTE PRESSURE		
PSIG	Inches of Hg	PSIA	Inches of Hg	Torrlicelli
-14.70000	29.92000	0.0	0.0	0.0
-14.69998	29.91996	0.00002	0.00004	0.001
-14.69996	29.91992	0.00004	0.00008	0.002
-14.69994	29.91988	0.00006	0.00012	0.003
-14.69992	29.91984	0.00008	0.00016	0.004
-14.69990	29.91980	0.00010	0.00020	0.005
-14.69981	29.91961	0.00019	0.00039	0.010
-14.69961	29.91921	0.00039	0.00079	0.020
-14.69942	29.91882	0.00058	0.00118	0.030
-14.69923	29.91843	0.00077	0.00157	0.040
-14.69903	29.91803	0.00097	0.00197	0.050
-14.69806	29.91606	0.00194	0.00394	0.100
-14.69613	29.91212	0.00387	0.00788	0.200
-14.69449	29.90818	0.00551	0.01182	0.300
-14.69226	29.90424	0.00774	0.01576	0.400
-14.69032	29.90030	0.00968	0.01970	0.500
-14.68066	29.88063	0.01934	0.03937	1.000
-14.66698	29.84126	0.03302	0.07874	2.000
-14.64197	29.80189	0.05803	0.11811	3.000
-14.62262	29.76252	0.07738	0.15748	4.000
-14.60329	29.72315	0.09671	0.19685	5.000
-14.50658	29.52630	0.19342	0.39370	10.000
-14.40980	29.32940	0.29020	0.59060	15.000
-14.31320	29.13260	0.38680	0.78740	20.000
-14.21840	28.93570	0.48160	0.98430	25.000
-14.20870	28.920	0.49130	1.000	25.400
-14.11970	28.740	0.58030	1.181	30.000
-13.75700	28.000	0.94330	1.920	48.770
-12.28300	25.000	2.4170w0	4.920	124.970
-10.31800	21.000	4.38200	8.920	226.570
-8.84400	18.000	5.85600	11.920	302.770
-7.37000	15.000	7.320	14.920	378.970
-5.89600	12.000	8.804	17.920	455.770
-4.91300	10.000	9.787	19.920	505.970
-3.93000	8.000	10.770	21.920	556.770
-2.94800	6.000	11.752	23.920	607.570
-1.96500	4.000	12.735	25.920	658.370
-0.98300	2.000	13.732	27.920	709.170
-0.49100	1.000	14.209	28.920	733.570
-0.24600	0.500	14.454	29.420	747.270
ATMOSPHERIC				
0.0	0.0	14.700	29.920	760.000
+ 0.30		15.000	30.540	775.720
+ 1.00		15.700	31.970	811.910
+ 2.00		16.700	34.000	863.630
+ 10.00		24.700	34.000	277.35

Water Temp.	Saturation Pressure	Weight	Weight Density	Specific Volume
Deg. F	PSIA	lbs/Gallon	lbs/Cu.Ft.	Cu.Ft./lb
32	0.0886	8.844	62.414	0.016022
40	0.1216	8.345	62.426	0.016019
50	0.1780	8.343	62.410	0.016023
60	0.2561	8.338	62.371	0.016033
70	0.3629	8.329	62.305	0.016050
80	0.5068	8.318	62.220	0.016072
90	0.6981	8.304	62.116	0.016099
100	0.9492	8.288	61.996	0.016130
110	1.2750	8.270	61.862	0.016165
120	1.6927	8.250	61.713	0.016204
130	2.2230	8.228	61.550	0.016247
140	2.8892	8.205	61.376	0.016293
150	3.7184	8.180	61.188	0.016343
160	4.7414	8.154	60.994	0.016395
170	5.9926	8.126	60.787	0.016451
180	7.5110	8.097	60.569	0.016510
190	9.340	8.067	60.343	0.016572
200	11.526	8.035	60.107	0.016637
210	14.123	8.002	59.862	0.016705
212	14.696	7.996	59.812	0.016719
220	17.186	7.969	59.613	0.016775
240	24.968	7.898	59.081	0.016926
260	35.427	7.823	58.517	0.017089
280	49.200	7.743	57.924	0.017264
300	67.005	7.661	57.307	0.01745
350	134.604	7.431	55.586	0.01799
400	247.259	7.172	53.648	0.01864
450	422.55	6.880	51.467	0.01943
500	680.86	6.543	48.948	0.02043
550	1045.43	6.143	45.956	0.02176
600	1543.2	5.655	42.301	0.02364
650	2208.4	4.999	37.397	0.02674
700	3094.3	3.651	27.307	0.03662

NOTE:

Weight of water per gallon is based on 7.48052 gallons per cubic foot.

Specific gravity of water @ 60°F = 1.00

PIPE DATA TABLES

Pipe Size (in.)	Outside Diameter (in.)	Weight Class	Carbon Steel Sched.	Stainless Steel Sched.	Wall Thickness (in.)	Inside Diameter (in.)	Circum. (Ext.) (in.)	Circum. (Int.) (in.)	Flow Area (sq. in.)	Weight of Pipe (lbs./Ft.)	Weight of Water (lbs./Ft.)	Gallons of Water per Ft.	Section Modulus	Pipe Size (in.)
1/8	.405	—	—	10S	.049	.307	1.27	.96	.074	.19	.032	.004	.00437	1/8
		STD	40	40S	.068	.269		.85	.057	.24	.025	.003	.00523	
		XS	80	80S	.095	.215		.68	.036	.31	.016	.002	.00602	
1/4	.540	—	—	10S	.065	.410	1.70	1.29	.132	.33	.057	.007	.01032	1/4
		STD	40	40S	.088	.364		1.14	.104	.42	.045	.005	.01227	
		XS	80	80S	.119	.302		.95	.072	.54	.031	.004	.01395	
3/8	.675	—	—	10S	.065	.545	2.12	1.71	.233	.42	.101	.012	.01736	3/8
		STD	40	40S	.091	.493		1.55	.191	.57	.083	.010	.0216	
		XS	80	80S	.126	.423		1.33	.141	.74	.061	.007	.0255	
1/2	.840	—	—	5S	.065	.710	2.64	2.23	.396	.54	.172	.021	.0285	1/2
		—	—	10S	.083	.674		2.12	.357	.67	.155	.019	.0341	
		STD	40	40S	.109	.622		1.95	.304	.85	.132	.016	.0407	
		XS	80	80S	.147	.546		1.72	.234	1.09	.102	.012	.0478	
		—	160	—	.187	.466		1.46	.171	1.31	.074	.009	.0527	
		XXS	—	—	.294	.252		.79	.050	1.71	.022	.003	.0577	
		—	—	5S	.065	.920		2.89	.665	.69	.288	.035	.0467	
3/4	1.050	—	—	10S	.083	.884	3.30	2.78	.614	.86	.266	.032	.0566	3/4
		STD	40	40S	.113	.824		2.59	.533	1.13	.231	.028	.0706	
		XS	80	80S	.154	.742		2.33	.433	1.47	.188	.022	.0853	
		—	160	—	.219	.612		1.92	.296	1.94	.128	.015	.1004	
		XXS	—	—	.308	.434		1.36	.148	2.44	.064	.008	.1103	
		—	—	5S	.065	1.185		3.72	1.103	.87	.478	.057	.0760	
		—	—	10S	.109	1.097		3.45	.945	1.40	.409	.049	.1151	
1	1.315	STD	40	40S	.133	1.049	4.13	3.30	.864	1.68	.375	.045	.1328	1
		XS	80	80S	.179	.957		3.01	.719	2.17	.312	.037	.1606	
		—	160	—	.250	.815		2.56	.522	2.84	.230	.027	.1903	
		XXS	—	—	.358	.599		1.88	.282	3.66	.122	.015	.2136	
		—	—	5S	.065	1.530		4.81	1.839	1.11	.797	.096	.1250	
1 1/4	1.660	—	—	10S	.109	1.442	5.22	4.53	1.633	1.81	.708	.085	.1934	1 1/4
		STD	40	40S	.140	1.380		4.34	1.495	2.27	.649	.078	.2346	
		XS	80	80S	.191	1.278		4.02	1.283	3.00	.555	.067	.2913	
		—	160	—	.250	1.160		3.64	1.057	3.76	.458	.055	.3421	
		XXS	—	—	.382	.896		2.81	.630	5.21	.273	.033	.4110	
1 1/2	1.900	—	—	5S	.065	1.770	97	5.56	2.461	1.28	1.066	.128	.1662	1 1/2
		—	—	10S	.109	1.682		5.28	2.222	2.09	.963	.115	.2598	
		STD	40	40S	.145	1.610		5.06	2.036	2.72	.882	.106	.3262	
		XS	80	80S	.200	1.500		4.71	1.767	3.63	.765	.092	.4118	
		—	160	—	.281	1.338		4.20	1.406	4.86	.608	.073	.5078	
		XXS	—	—	.400	1.100		3.46	.950	6.41	.420	.049	.5977	
		—	—	5S	.065	2.245		7.05	3.958	1.61	1.72	.206	.2652	
2	2.375	—	—	10S	.109	2.157	7.46	6.78	3.654	2.64	1.58	.190	.4204	2
		STD	40	40S	.154	2.067		6.49	3.355	3.65	1.45	.174	.5606	
		XS	80	80S	.218	1.939		6.09	2.953	5.02	1.28	.153	.7309	
		—	160	—	.344	1.687		5.30	2.241	7.46	.97	.116	.9790	
		XXS	—	—	.436	1.503		4.72	1.774	9.03	.77	.092	1.1040	
		—	—	5S	.083	2.709		8.51	5.764	2.48	2.50	.299	.4939	
		—	—	10S	.120	2.635		8.28	5.453	3.53	2.36	.283	.6868	
2 1/2	2.875	STD	40	40S	.203	2.469	9.03	7.76	4.788	5.79	2.07	.249	1.064	2 1/2
		XS	80	80S	.276	2.323		7.30	4.238	7.66	1.87	.220	1.339	
		—	160	—	.375	2.125		6.68	3.546	10.01	1.54	.184	1.638	
		XXS	—	—	.552	1.771		5.56	2.464	13.69	1.07	.128	1.997	
		—	—	5S	.083	2.709		8.51	5.764	2.48	2.50	.299	.4939	

PIPE DATA TABLES CONT'D.

Pipe Size (in.)	Outside Diameter (in.)	Weight Class	Carbon Steel Sched.	Stainless Steel Sched.	Wall Thickness (in.)	Inside Diameter (in.)	Circum. (Ext.) (in.)	Circum (Int.) (in.)	Flow Area (sq. in.)	Weight of Pipe (lbs/Ft.)	Weight of Water (lbs/Ft.)	Gallons of Water per Ft.	Section Modulus	Pipe Size (in.)
3	3.500	-	-	5S	.083	3.334	11.00	10.47	8.730	3.03	3.78	.454	.744	3
		-	-	10S	.120	3.260		10.24	8.347	4.33	3.62	.434	1.041	
		STD	40	40S	.216	3.068		9.64	7.393	7.58	3.20	.384	1.724	
		XS	80	80S	.300	2.900		9.11	6.605	10.25	2.86	.343	2.225	
		-	160	-	.438	2.624		8.24	5.408	14.32	2.35	.281	2.876	
		XXS	-	-	.600	2.300		7.23	4.155	18.58	1.80	.216	3.424	
4	4.500	-	-	5S	.083	4.334	14.14	13.62	14.75	3.92	6.39	.766	1.249	4
		-	-	10S	.120	4.260		13.38	14.25	5.61	6.18	.740	1.761	
		STD	40	40S	.237	4.026		12.65	12.73	10.79	5.50	.661	3.214	
		XS	80	80S	.337	3.826		12.02	11.50	14.98	4.98	.597	4.271	
		-	120	-	.438	3.624		11.39	10.31	19.00	4.47	.536	5.178	
		-	160	-	.531	3.438		10.80	9.28	22.51	4.02	.482	5.898	
5	5.563	-	-	5S	.109	5.345	17.48	16.79	22.44	6.36	9.72	1.17	2.498	5
		-	-	10S	.134	5.295		16.63	22.02	7.77	9.54	1.14	3.029	
		STD	40	40S	.258	5.047		15.86	20.01	14.62	8.67	1.04	5.451	
		XS	80	80S	.375	4.813		15.12	18.19	20.78	7.88	.945	7.431	
		-	120	-	.500	4.563		14.34	16.35	27.04	7.09	.849	9.250	
		-	160	-	.625	4.313		13.55	14.61	32.96	6.33	.759	10.796	
6	6.625	-	-	5S	.109	6.407	20.81	20.13	32.24	7.60	13.97	1.68	3.576	6
		-	-	10S	.134	6.357		19.97	31.74	9.29	13.75	1.65	4.346	
		STD	40	40S	.280	6.065		19.05	28.89	18.97	12.51	1.50	8.496	
		XS	80	80S	.432	5.761		18.10	26.07	28.57	11.29	1.35	12.22	
		-	120	-	.562	5.501		17.28	23.77	36.39	10.30	1.24	14.98	
		-	160	-	.719	5.187		16.30	21.15	45.35	9.16	1.10	17.81	
8	8.625	-	-	5S	.109	8.407	27.10	26.41	55.51	9.93	24.06	2.88	6.131	8
		-	-	10S	.148	8.329		26.17	54.48	13.40	23.61	2.83	8.212	
		-	20	-	.250	8.125		25.53	51.85	22.36	22.47	2.69	13.39	
		-	30	-	.277	8.071		25.36	51.16	24.70	22.17	2.66	14.69	
		STD	40	40S	.322	7.981		25.07	50.03	28.55	21.70	2.60	16.81	
		-	60	-	.406	7.813		24.55	47.94	35.64	20.77	2.49	20.58	
10	10.750	XS	80	80S	.500	7.625	33.77	23.95	45.66	43.39	19.78	2.37	24.51	10
		-	100	-	.594	7.437		23.36	43.46	50.95	18.83	2.26	28.14	
		-	120	-	.719	7.187		22.58	40.59	60.71	17.59	2.11	32.58	
		-	140	-	.812	7.001		21.99	38.50	67.76	16.68	2.00	35.65	
		XXS	-	-	.875	6.875		21.60	37.12	72.42	16.10	1.93	37.56	
		-	160	-	.906	6.813		21.40	36.46	74.69	15.80	1.89	38.48	
10	10.750	-	-	5S	.134	10.482	33.77	32.93	86.29	15.19	37.39	4.48	11.71	10
		-	-	10S	.165	10.420		32.74	85.28	18.65	36.95	4.43	14.30	
		-	20	-	.250	10.250		32.20	82.52	28.04	35.76	4.29	21.15	
		-	30	-	.307	10.136		31.84	80.69	34.24	34.96	4.19	25.57	
		STD	40	40S	.365	10.020		31.48	78.86	40.48	34.20	4.10	29.90	
		XS	60	80S	.500	9.750		30.63	74.66	54.74	32.35	3.88	39.43	
10	10.750	-	80	-	.594	9.562	33.77	30.04	71.84	64.43	31.13	3.73	45.54	10
		-	100	-	.719	9.312		29.25	68.13	77.03	29.53	3.54	53.22	
		-	120	-	.844	9.062		28.47	64.53	89.29	27.96	3.35	60.32	
		XXS	140	-	1.000	8.750		27.49	60.13	104.13	26.06	3.12	68.43	
		-	160	-	1.125	8.500		26.70	56.75	115.64	24.59	2.95	74.29	

PIPE DATA TABLES CONT'D.

Pipe Size (in.)	Outside Diameter (in.)	Weight Class	Carbon Steel Sched.	Stainless Steel Sched.	Wall Thickness (in.)	Inside Diameter (in.)	Circum. (Ext.) (in.)	Circum. (Int.) (in.)	Flow Area (sq. in.)	Weight of Pipe (lbs/Ft.)	Weight of Water (lbs/Ft.)	Gallons of Water per Ft.	Section Modulus	Pipe Size (in.)
12	12.750		-	5S	.156	12.438	40.06	39.08	121.50	20.98	52.65	6.31	19.2	12
			-	10S	.180	12.390		38.92	120.57	24.17	52.25	6.26	22.0	
			-	20	.250	12.250		38.48	117.86	33.38	51.07	6.12	30.2	
			-	30	.330	12.090		37.98	114.80	43.77	49.74	5.96	39.0	
		STD	-	40S	.375	12.000		37.70	113.10	49.56	49.00	5.88	43.8	
			-	40	.406	11.938		37.50	111.93	53.52	48.50	5.81	47.1	
		XS	-	80S	.500	11.750		36.91	108.43	65.42	46.92	5.63	56.7	
			-	60	.562	11.626		36.52	106.16	73.15	46.00	5.51	62.8	
			-	80	.688	11.374		35.73	101.64	88.63	44.04	5.28	74.6	
			-	100	.844	11.062		34.75	96.14	107.32	41.66	4.99	88.1	
			-	120	1.000	10.750		33.77	90.76	125.49	39.33	4.71	100.7	
			-	140	1.125	10.500		32.99	86.59	139.67	37.52	4.50	109.9	
			-	160	1.312	10.126		31.81	80.53	160.27	34.89	4.18	122.6	
14	14.000		-	5S	.156	13.688	43.98	43.00	147.15	23.07	63.77	7.64	23.2	14
			-	10S	.188	13.624		42.80	145.78	27.73	63.17	7.57	27.8	
			-	10	.250	13.500		42.41	143.14	36.71	62.03	7.44	36.6	
			-	20	.312	13.376		42.02	140.52	45.61	60.89	7.30	45.0	
		STD	-	30	.375	13.250		41.63	137.88	54.57	59.75	7.16	53.2	
			-	40	.438	13.124		41.23	135.28	63.44	58.64	7.03	61.3	
		XS	-	-	.500	13.000		40.84	132.73	72.09	57.46	6.90	69.1	
			-	60	.594	12.812		40.25	128.96	85.05	55.86	6.70	80.3	
			-	80	.750	12.500		39.27	122.72	106.13	53.18	6.37	98.2	
			-	100	.938	12.124		38.09	115.49	130.85	50.04	6.00	117.8	
			-	120	1.094	11.812		37.11	109.62	150.79	47.45	5.69	132.8	
			-	140	1.250	11.500		36.13	103.87	170.28	45.01	5.40	146.8	
			-	160	1.406	11.188		35.15	98.31	189.11	42.60	5.11	159.6	
16	16.00		-	5S	.165	15.670	50.27	49.23	192.85	27.90	83.57	10.02	32.2	16
			-	10S	.188	15.624		49.08	191.72	31.75	83.08	9.96	36.5	
			-	10	.250	15.500		48.69	188.69	42.05	81.74	9.80	48.0	
			-	20	.312	15.376		48.31	185.69	52.27	80.50	9.65	59.2	
		STD	-	30	.375	15.250		47.91	182.65	62.58	79.12	9.49	70.3	
			-	40	.500	15.000		47.12	176.72	82.77	76.58	9.18	91.5	
		XS	-	60	.656	14.688		46.14	169.44	107.50	73.42	8.80	116.6	
			-	80	.844	14.312		44.96	160.92	136.61	69.73	8.36	144.5	
			-	100	1.031	13.938		43.79	152.58	164.82	66.12	7.93	170.5	
			-	120	1.219	13.562		42.61	144.50	192.43	62.62	7.50	194.5	
			-	140	1.438	13.124		41.23	135.28	233.64	58.64	7.03	220.0	
			-	160	1.594	12.812		40.26	128.96	245.25	55.83	6.70	236.7	
18	18.00		-	5S	.165	17.67	56.55	55.51	245.22	31.43	106.26	12.74	40.8	18
			-	10S	.188	17.62		55.37	243.95	35.76	105.71	12.67	46.4	
			-	10	.250	17.50		54.98	240.53	47.39	104.21	12.49	61.1	
			-	20	.312	17.38		54.59	237.13	58.94	102.77	12.32	75.5	
		STD	-	-	.375	17.25		54.19	233.71	70.59	101.18	12.14	89.6	
			-	30	.438	17.12		53.80	230.30	82.15	99.84	11.96	103.4	
		XS	-	-	.500	17.00		53.41	226.98	93.45	98.27	11.79	117.0	
			-	40	.562	16.88		53.02	223.68	104.87	96.93	11.62	130.1	
			-	60	.750	16.50		51.84	213.83	138.17	92.57	11.11	168.3	
			-	80	.938	16.12		50.66	204.24	170.92	88.50	10.61	203.8	
			-	100	1.156	15.69		49.29	193.30	207.96	83.76	10.04	242.3	
			-	120	1.375	15.25		47.91	182.66	244.14	79.07	9.49	277.6	
			-	140	1.562	14.88		46.73	173.80	274.22	75.32	9.03	305.5	
			-	160	1.781	14.44		45.36	163.72	308.50	70.88	8.50	335.6	

PIPE DATA TABLES CONT'D.

Pipe Size (in.)	Outside Diameter (in.)	Weight Class	Carbon Steel Sched.	Stainless Steel Sched.	Wall Thickness (in.)	Inside Diameter (in.)	Circum. (Ext.) (in.)	Circum (Int.) (in.)	Flow Area (sq. in.)	Weight of Pipe (lbs/Ft.)	Weight of Water (lbs/Ft.)	Gallons of Water per Ft.	Section Modulus	Pipe Size (in.)
20	20.00	—	—	5S	.188	19.62	62.83	61.65	302.46	39.78	131.06	15.71	57.4	20
		—	—	10S	.218	19.56		61.46	300.61	46.06	130.27	15.62	66.3	
		—	10	—	.250	19.50		61.26	298.65	52.73	129.42	15.51	75.6	
		—	20	—	.375	19.25		60.48	290.04	78.60	125.67	15.12	111.3	
		STD	30	—	.500	19.00		59.69	283.53	104.13	122.87	14.73	145.7	
		XS	40	—	.594	18.81		59.10	278.00	123.11	120.46	14.44	170.4	
		—	60	—	.812	18.38		57.73	265.21	166.40	114.92	13.78	225.7	
		—	80	—	1.031	17.94		56.35	252.72	208.87	109.51	13.13	277.1	
		—	100	—	1.281	17.44		54.78	238.83	256.10	103.39	12.41	331.5	
		—	120	—	1.500	17.00		53.41	226.98	296.37	98.35	11.79	375.5	
		—	140	—	1.750	16.50		51.84	213.82	341.09	92.66	11.11	421.7	
		—	160	—	1.969	16.06		50.46	202.67	379.17	87.74	10.53	458.5	
22	22.00	—	—	5S	.188	21.62	69.12	67.93	367.25	43.80	159.14	19.08	69.7	22
		—	—	10S	.218	21.56		67.75	365.21	50.71	158.26	18.97	80.4	
		—	10	—	.250	21.50		67.54	363.05	58.07	157.32	18.86	91.8	
		STD	20	—	.375	21.25		66.76	354.66	86.61	153.68	18.42	135.4	
		XS	30	—	.500	21.00		65.97	346.36	114.81	150.09	17.99	117.5	
		—	60	—	.875	20.25		63.62	322.06	197.41	139.56	16.73	295.0	
		—	80	—	1.125	19.75		62.05	306.35	250.81	132.76	15.91	366.4	
		—	100	—	1.375	19.25		60.48	291.04	302.88	126.12	15.12	432.6	
		—	120	—	1.625	18.75		58.90	276.12	353.61	119.65	14.34	493.8	
		—	140	—	1.875	18.25		57.33	261.59	403.00	113.36	13.59	550.3	
		—	160	—	2.125	17.75		55.76	247.45	451.06	107.23	12.85	602.4	
24	24.00	—	—	5S	.218	23.56	75.40	74.03	436.10	55	188.98	22.65	96.0	24
		—	10	10S	.250	23.50		73.83	433.74	63	187.95	22.53	109.6	
		STD	20	—	.375	23.25		73.04	424.56	95	183.95	22.05	161.9	
		XS	—	—	.500	23.00		72.26	415.48	125	179.87	21.58	212.5	
		—	30	—	.562	22.88		71.86	411.00	141	178.09	21.35	237.0	
		—	40	—	.688	22.62		71.08	402.07	171	174.23	20.88	285.1	
		—	60	—	.969	22.06		69.31	382.35	238	165.52	19.86	387.7	
		—	80	—	1.219	21.56		67.74	365.22	297	158.26	18.97	472.8	
		—	100	—	1.531	20.94		65.78	344.32	367	149.06	17.89	570.8	
		—	120	—	1.812	20.38		64.01	326.08	430	141.17	16.94	652.1	
		—	140	—	2.062	19.88		62.44	310.28	483	134.45	16.12	718.9	
		—	160	—	2.344	19.31		60.67	292.98	542	126.84	15.22	787.9	
30	30.00	—	—	5S	.250	29.50	94.25	92.68	683.49	79	296.18	35.51	172.3	30
		—	10	10S	.312	29.38		92.29	677.71	99	293.70	35.21	213.8	
		STD	—	—	.375	29.25		91.89	671.96	119	291.18	34.91	255.3	
		XS	20	—	.500	29.00		91.11	660.52	158	286.22	34.31	336.1	
		—	30	—	.625	28.75		90.32	649.18	196	281.31	33.72	414.9	

PRESSURE TEMPERATURE LIMITS

Body Material and End Connection Selection

BASED ON: ANSI B16.1-1989 (Cast Iron) B16.24-1991 (Cast Bronze) B16.5-1996 (All Steels)

Enter selection table at the service temperature and read down the column. Obtain a figure for maximum allowable pressure which equals or exceeds the inlet pressure in the system. The materials are ranked in the order of their relative cost.

It is wise in most cases to make several tentative selections for body material and end connection to determine which is most economical. For instance, it may be advantageous to go to a higher body rating than to select a stronger alloy.

See product design limitations prior to final selection. Regular type (not bold) indicates recommended temperatures for each

Bold type areas indicate temperatures permitted by ANSI B16.5-1996, but NOT recommended. material.

2 = CLASS B CAST IRON
6 = GRADE WC1 (0.50% MOLY)
4 = GRADE C5 (5.50% CHROME)
22 = CAST BRONZE
8 = GRADE WC6 (1.25% CHROME)
9 = GRADE CF8 (304 SST)
3 = GRADE WCB CARBON STEEL
7 = GRADE WC9 (2.25% CHROME)
5 = GRADE CF8M (316 SST)

MAXIMUM PRESSURE (PSIG) AT SERVICE TEMPERATURE (°F) - (NON-SHOCK)


END CONNECTIONS	BODY MAT'L CODE	ASTM SPEC.	TEMPERATURE (°F)																			
			100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
125# FLANGES THREADS 2"-12	2 22	AL26 B62	200 200	200 200	190 190	175 180	165 165	150 150	140 125	125												
125# FLANGES THREADS 14"-24	2 22	AL26 B62	150 200	150 200	135 190	125 180	110 165	100 150	125													
150# FLANGES SWE. BWE THREADS	22	B61	225	225	215	205	195	180	170	160	150	140										
	22	B62	225	225	210	195	180	165	150													
	3	A216	285		260		230		200		170		140	125	110	95	80	65	50	35	20	
	6	A217	265		260		230		200		170		140	125	110	95	80	65	50	35	20	
	8	A217	290		260		230		200		170		140	125	110	95	80	65	50	35	20	
	7	A217	290		260		230		200		170		140	125	110	95	80	65	50	35	20	
	4	A217	290		260		230		200		170		140	125	110	95	80	65	50	35	20	
250# FLANGES THREADS	2	AL26	500	500	460	415	375	335	290	250												
	22	B62	400	400	385	365	335	300	250	250												
	22	B61	500	500	475	450	425	400	375	350	325	300										
300# FLANGES SWE. BWE THREADS	22	B62	500	500	465	425	390	350	315													
	3	A216	740		675		655		635	600			550	535	535	505	410	270	170	105	50	
	6	A217	695		680		655		640	620			605	590	570	530	510	485	450	320	165	
	8	A217	750		750		720		695	665			605	590	570	530	510	485	450	320	215	
	7	A217	750		750		730		705	665			605	590	570	530	510	485	450	375	260	
	4	A217	750		745		715		705	665			605	590	570	530	510	485	370	275	200	
	9	A351	720		600		540		495	465			435	430	425	415	405	395	390	380	329	
600# FLANGES SWE. BWE THREADS	5	A351	720		620		560		515	480			450	445	430	425	420	420	415	385	350	
	3	A216	1480		1350		1315		1270	1200			1095	1075	1065	1010	825	535	345	205	105	
	6	A217	1390		1360		1305		1280	1245			1210	1175	1135	1065	1015	975	900	560	330	
	8	A217	1500		1500		1445		1385	1330			1210	1175	1135	1065	1015	975	900	640	430	
	7	A217	1500		1500		1455		1410	1330			1210	1175	1135	1065	1015	975	900	755	520	
900# FLANGES SWE. BWE	4	A217	1500		1490		1430		1330	1270			1210	1175	1135	1055	1015	965	740	550	400	
	9	A351	1440		1200		1080		995	930			875	860	850	830	805	790	780	765	640	
	5	A351	1440		1240		1120		1025	955			900	890	870	855	845	835	830	775	700	
	3	A216	2220		2025		1970		1900	1795			1640	1610	1600	1510	1235	805	515	310	155	
	6	A217	2085		2035		1955		1920	1865			1815	1765	1705	1595	1525	1460	1350	955	650	
1500# FLANGES SWE. BWE	8	A217	2250		2250		2165		2080	1995			1815	1765	1705	1595	1525	1460	1350	955	650	
	7	A217	2250		2250		2185		2115	1995			1815	1765	1705	1595	1525	1460	1350	1130	780	
	4	A217	2250		2235		2150		2115	1995			1815	1765	1705	1585	1525	1450	1310	825	595	
	9	A351	2160		1800		1620		1490	1395			1310	1290	1275	1245	1210	1190	1165	1145	965	
	5	A351	2160		1860		1680		1540	1435			1355	1330	1305	1280	1265	1255	1245	1160	1050	
2500# FLANGES SWE. BWE	3	A216	3705		3375		3280		3170	2995			2735	2685	2665	2520	2060	1340	860	515	260	
	6	A217	3470		3395		3260		3200	3105			3025	2940	2840	2660	2540	2435	2245	1405	825	
	8	A217	3750		3750		3610		3465	3325			3025	2940	2840	2660	2540	2435	2245	1595	1080	
	7	A217	3750		3750		3640		3530	3325			3025	2940	2840	2660	2540	2435	2245	1885	1305	
	4	A217	3750		3750		3580		3455	3325			3025	2940	2840	2640	2540	2415	1850	1370	995	
3500# FLANGES SWE. BWE	9	A351	3600		3000		2700		2485	2330			2185	2150	2125	2075	2015	1980	1945	1910	1605	
	5	A351	3600		3095		2795		2570	2390			2255	2220	2170	2135	2100	2090	2075	1930	1750	
	3	A216	6170		5625		5470		5280	4990			4560	4475	4440	4200	3430	2230	1430	860	430	
	6	A217	5785		5660		5435		5330	5180			5040	4905	4730	4430	4230	4060	3745	2345	1370	
	8	A217	6250		6250		6015		5775	5540			5040	4905	4730	4430	4230	4060	3745	2655	1800	
4500# FLANGES SWE. BWE	7	A217	6250		6250		6070		5880	5540			5040	4905	4730	4430	4230	4030	3085	2285	1655	
	4	A217	6250		6205		5965		5880	5540			5040	4905	4730	4400	4230	4030	3085	2285	1655	
	9	A351	6000		5000		4500		4140	3880			3640	3580	3540	3460	3360	3300	3240	3180	2675	
	5	A351	6000		5160		4660		4280	3980			3760	3700	3620	3560	3520	3480	3460	3220	2915	
	3	A216	8640		7870		7655		7390	6985			6385	6265	6215	5880	4800	3120	2000	1200	600	
5000# FLANGES SWE. BWE	6	A217	8100		7920		7605		7460	7250			7055	6865	6620	6200	5920	5680	5440	5200	4960	
	8	A217	8750		8750		8420		8085	7750			7055	6865	6620	6200	5920	5680	5440	5200	4960	
	7	A217	8750		8750		8495		8230	7750			7055	6865	6620	6200	5920	5680	5440	5200	4960	
	4	A217	8750		8685		8350		8230	7750			7055	6865	6620	6200	5920	5640	5430	5200	4960	
	9	A351	8400		7000		6300		5795	5430			5095	5010	4955	4845	4705	4620	4535	4450	3745	
6000# FLANGES SWE. BWE	5	A351	8400		7225		6525		5990	5570			5265	5180	5065	4925	4845	4730	4590	4505	4240	
	3	A216	11110		10120		9845		9505	8980			8210	8055	7990	7560	6170	4010	2570	1545	770	
	6	A217	10415		10185		9780		9595	9320			9070	8825	8515	7970	7610	7305	6740	4215	2470	
	8	A217	11250		11250		10830		10400	9965			9070	8825	8515	7970	7610	7305	6740	4785	3240	
	7	A217	11250		11250		10925		10585	9965			9070	8825	8515	7970	7610	7305	6740	5665	3910	
7000# FLANGES SWE. BWE	4	A217	11250		11170		10740		10385	9965			9070	8825	8515	7970	7610	7250	5555	4115	2985	
	9	A351	10800		9000		8100		7450	6985			6550	6445	6370	6230	6050	5940	5830	5725	4815	
	5	A351	10800		9290		8390		7705	7165			6770	6660	6515	6410	6335	6265	6230	5795	5245	
	3	A216	11110		10120		9845		9505	8980			8210	8055	7990	7560	6170	4010	2570	1545	770	
	6	A217	10415		10185		9780		9595	9320			9070	8825	8515	7970	7610	7305	6740	4215	2470	
8000# FLANGES SWE. BWE	8	A217	11250		11250		10830		10400	9965			9070	8825	8515	7970	7610	7305	6740	4785	3240	
	7	A217	11250		11250		10925		10585	9965			9070	8825	8515	7970	7610	7305	6740	5665	3910	
	4	A217	11250		11170		10740		10385	9965			9070	8825	8515	7970	7610	7250	5555	4115	2985	
	9	A351	10800		9000		8100		7450	6985			6550	6445	6370	6230	6050	5940	5830	5725	4815	
	5	A351	10800		9290		8390		7705	7165			6770	6660	6515	6410	6335	6265	6230	5795	5245	

SPENCE TYPICAL INSTALLATION FOR SANITARY STEAM SYSTEM

- | | |
|--------------------|--------------------------|
| 1. Inlet Pipe | 6. Bypass Valve |
| 2. Isolation Valve | 7. Steam Scrubber Filter |
| 3. Strainer | 8. SRV Type |
| 4. D50 Regulator | 9. Sanitary Steam Trap |
| 5. Bypass Pipe | |

Provide as much straight run of pipe on both sides of regulator as possible:

- 10 pipe diameters minimum to the inlet.
- 20 pipe diameters minimum of expanded line size from the outlet.

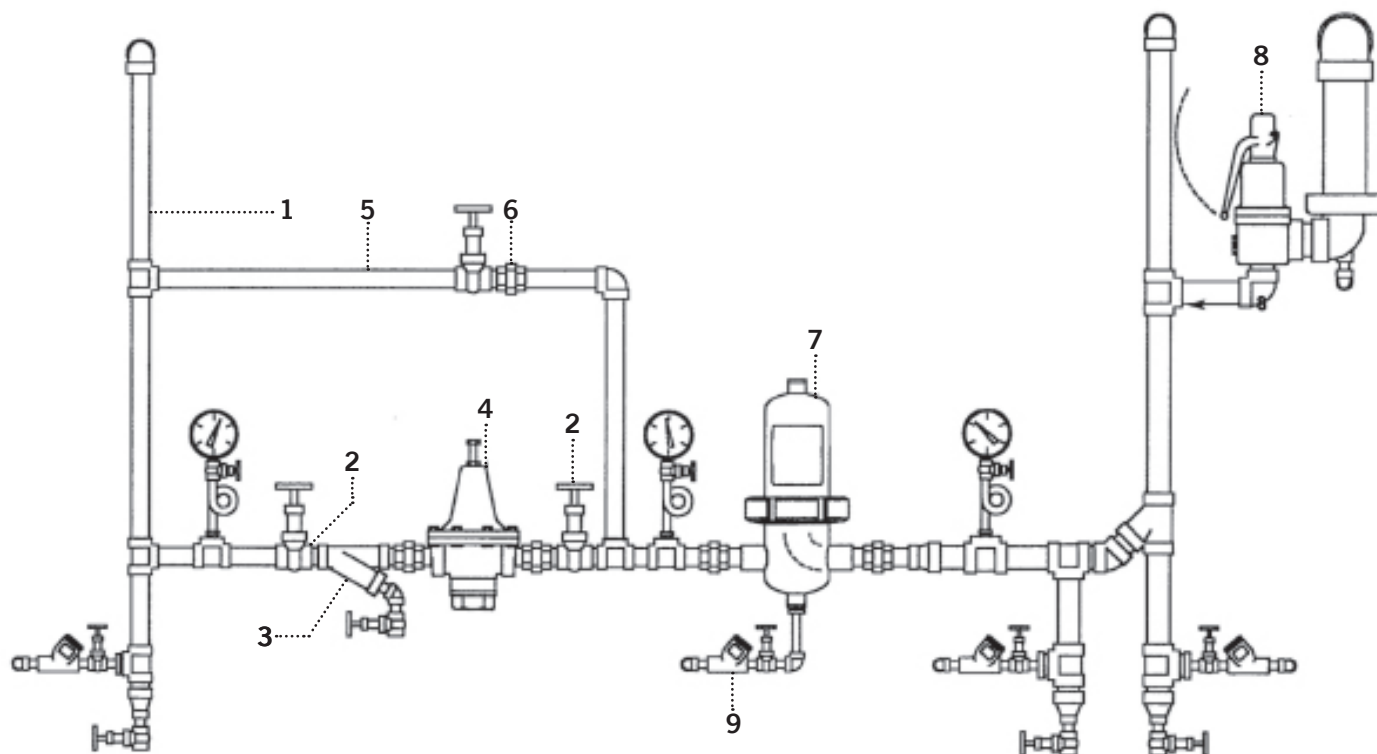


SPENCE SINGLE STAGE PRESSURE REDUCING STATION

- | | |
|--------------------|------------------------|
| 1. Inlet Pipe | 7. Delivery Pipe |
| 2. Isolation Valve | 8. SRV Type |
| 3. Strainer | 9. Drip Pan Elbow |
| 4. PRV Type | 10. Vent Stack |
| 5. Bypass Pipe | 11. Low Pressure Trap |
| 6. Bypass Valve | 12. High Pressure Trap |

Provide as much straight run of pipe on both sides of regulator as possible:

- 10 pipe diameters minimum to the inlet.
- 20 pipe diameters minimum of expanded line size from the outlet.

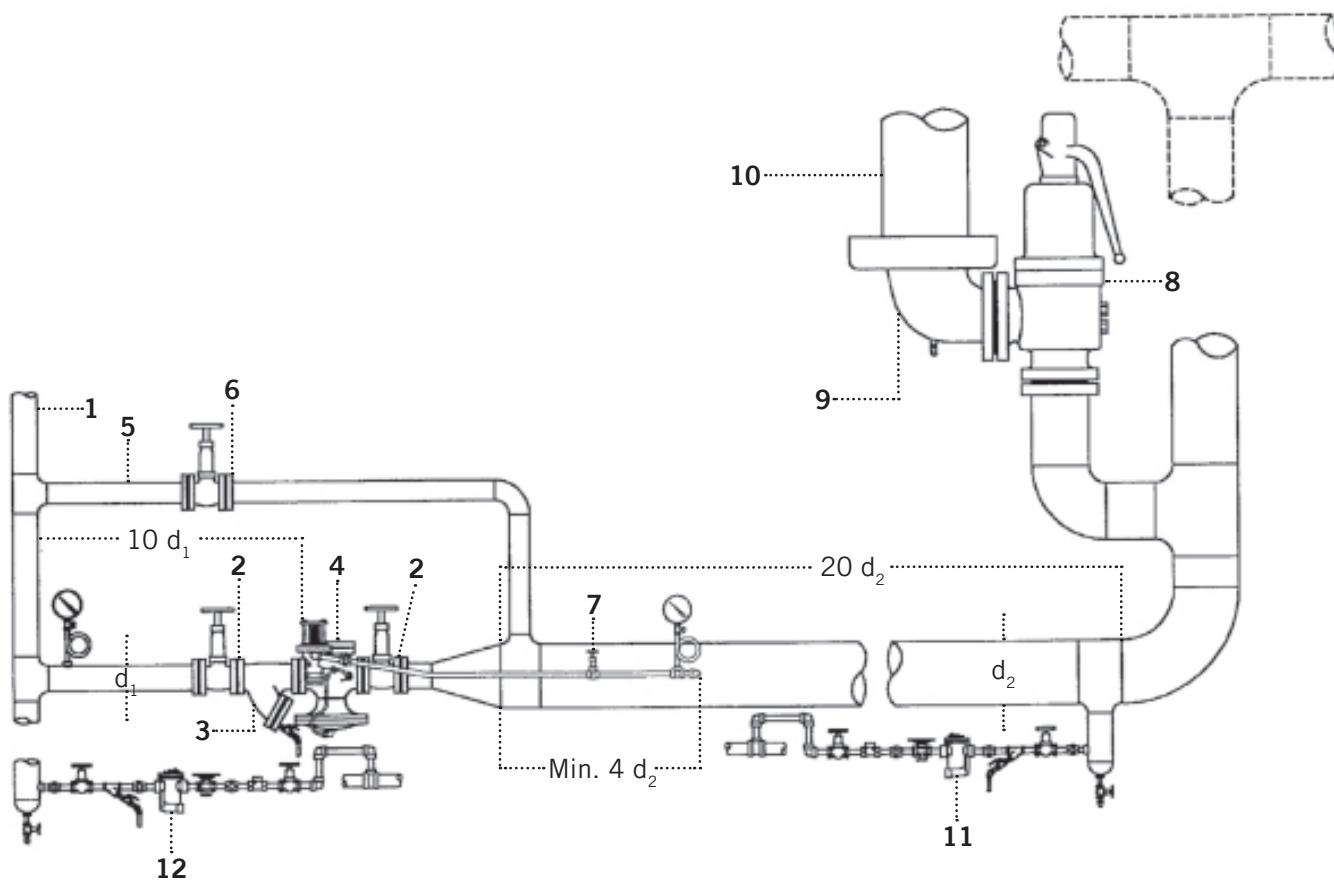


SPENCE TWO STAGE PRESSURE REDUCING STATION

- | | | |
|-------------------------------|--------------------------|------------------------|
| 1. Inlet Pipe | 8. Intermediate Pipe | 15. Delivery Pipe |
| 2. Isolation Valve | 9. Isolation Valve | 16. SRV Type |
| 3. Strainer | 10. Strainer | 17. 17. Drip Pan Elbow |
| 4. PRV Type | 11. Secondary PRV | 18. Vent Stack |
| 5. Bypass Pipe | 12. Bypass Pipe | 19. Low Pressure Trap |
| 6. High Pressure Bypass Valve | 13. Bypass Valve | |
| 7. High Pressure Trap | 14. Medium Pressure Trap | |

Provide as much straight run of pipe on both sides of regulator as possible:

- 10 pipe diameters minimum to the inlet.
- 20 pipe diameters minimum of expanded line size from the outlet.

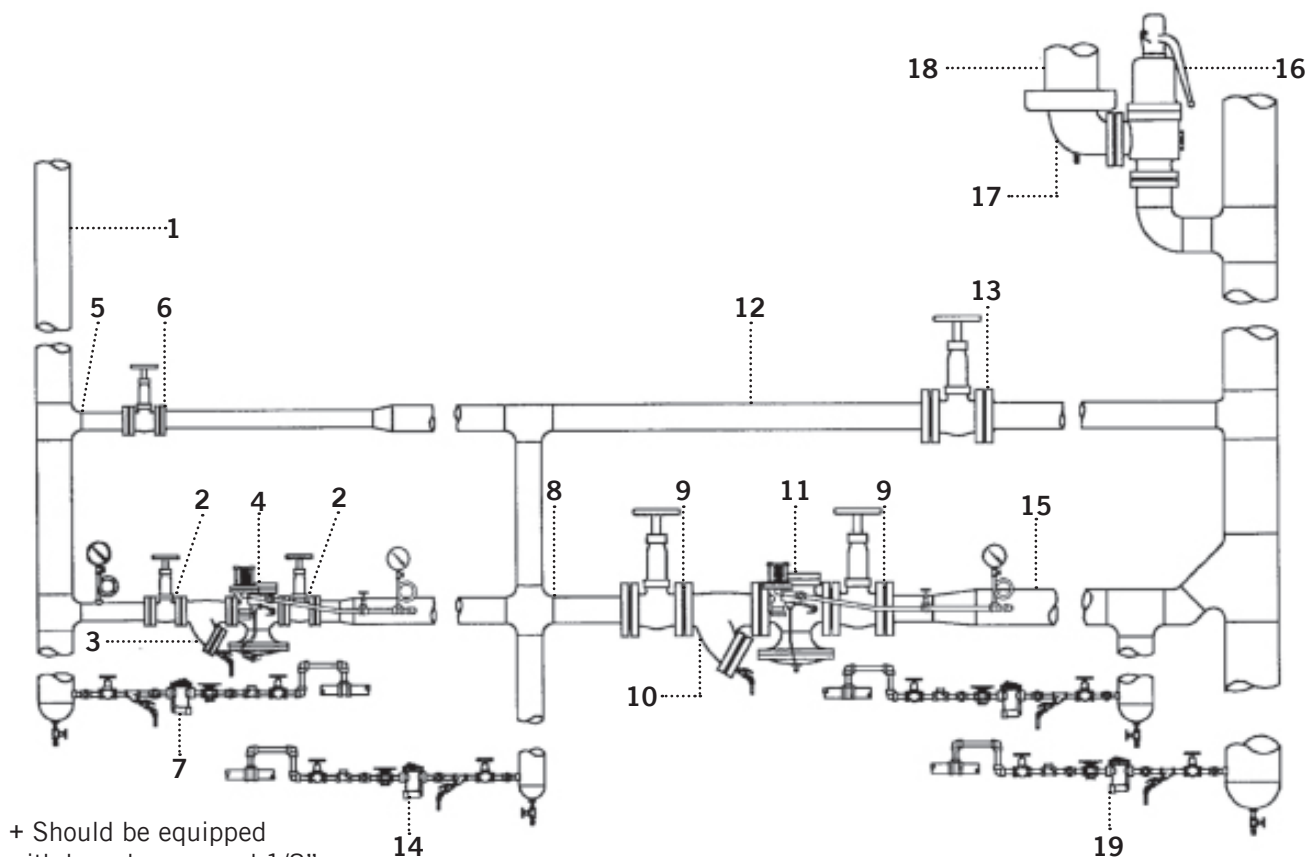


+ Should be equipped with base bypass and 1/8" bleed port.

SPENCE SINGLE STAGE PARALLEL PRESSURE REDUCING STATION

- | | |
|-----------------------|-----------------------|
| 1. Supply Pipe | 8. Intermediate Pipe |
| 2. Inlet Pipe | 9. Delivery Pipe |
| 3. Isolation Valve | 10. Discharge Pipe |
| 4. Strainer | 11. SRV Type |
| 5. PRV Type | 12. Drip Pan Elbow |
| 6. Bypass Pipe | 13. Vent Stack |
| 7. High Pressure Trap | 14. Low Pressure Trap |

Provide as much straight run of pipe on both sides of regulator as possible:

- 10 pipe diameters minimum to the inlet.
- 20 pipe diameters minimum of expanded line size from the outlet.

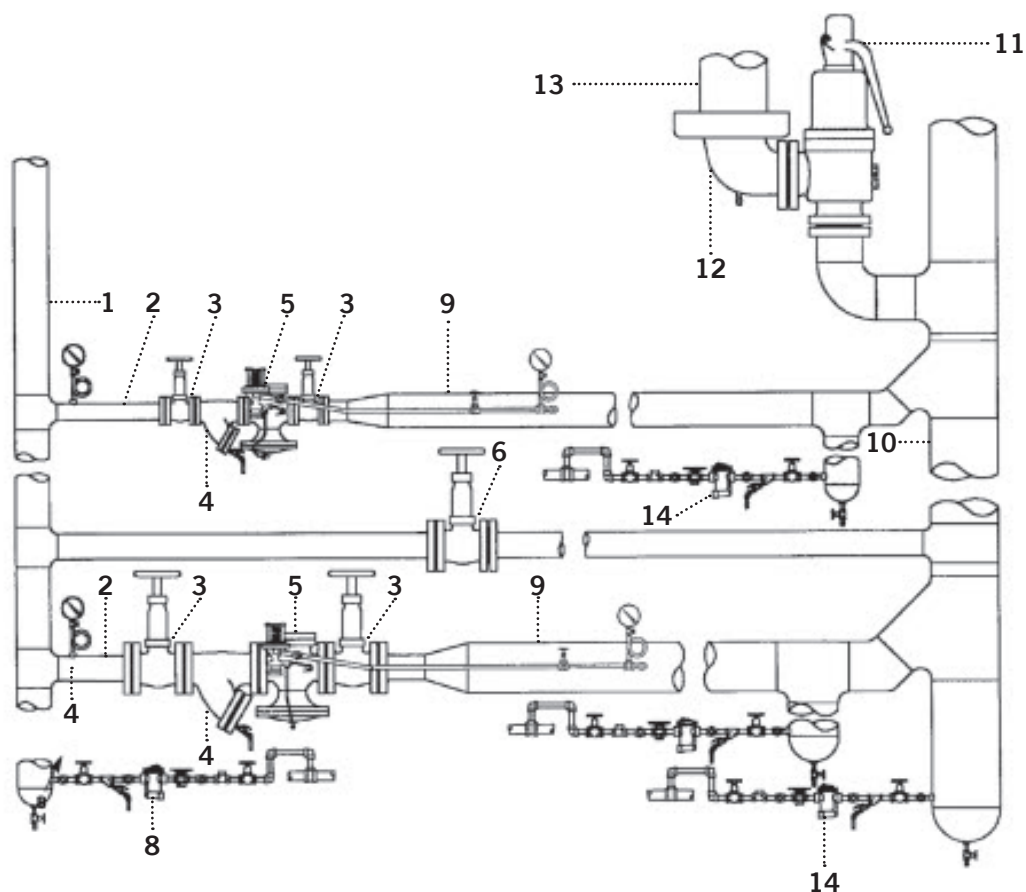


SPENCE TWO STAGE PARALLEL PRESSURE REDUCING STATION

- | | | |
|-------------------------------|-----------------------|--------------------------|
| 1. Supply Pipe | 8. High Pressure Trap | 15. Medium Pressure Trap |
| 2. Inlet Pipe | 9. Intermediate Pipe | 16. Delivery Pipe |
| 3. Isolation Valve | 10. Isolation Valve | 17. Discharge Pipe |
| 4. Strainer | 11. Strainer | 18. SRV Type |
| 5. Primary PRV+ | 12. Secondary PRV | 19. Drip Pan Elbow |
| 6. Bypass Pipe | 13. Bypass Pipe | 20. Vent Stack |
| 7. High Pressure Bypass Valve | 14. Bypass Valve | 21. Low Pressure Trap |

Provide as much straight run of pipe on both sides of regulator as possible:

- 10 pipe diameters minimum to the inlet.
- 20 pipe diameters minimum of expanded line size from the outlet.

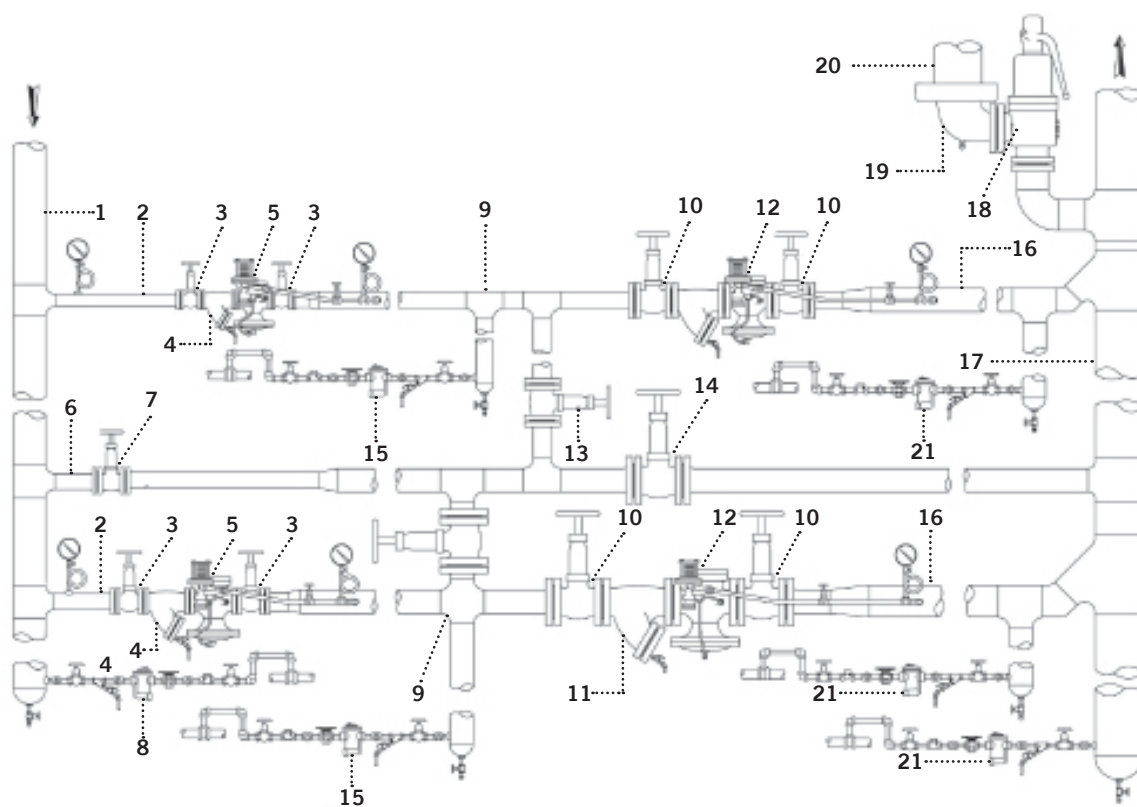


t Should be equipped with base bypass and 1/8" bleed port

SPENCE TYPICAL INSTALLATION FOR INSTANTANEOUS HEATER

- | | | |
|--------------------------|------------------------|----------------------|
| 1. Inlet Pipe | 8. Thermostat | 15. Vacuum Breaker |
| 2. Isolation Valve | 9. Heat Exchanger | 16. Hot Water Outlet |
| 3. Strainer | 10. Storage Tank | |
| 4. Temperature Regulator | 11. High Pressure Trap | |
| 5. Bypass Pipe | 12. Low Pressure Trap | |
| 6. Bypass Valve | 13. Thermometer | |
| 7. Check Valve | 14. Recirculating Pump | |

Provide as much straight run of pipe on both sides of regulator as possible:

- 10 pipe diameters minimum to the inlet.
- 20 pipe diameters minimum of expanded line size from the outlet.

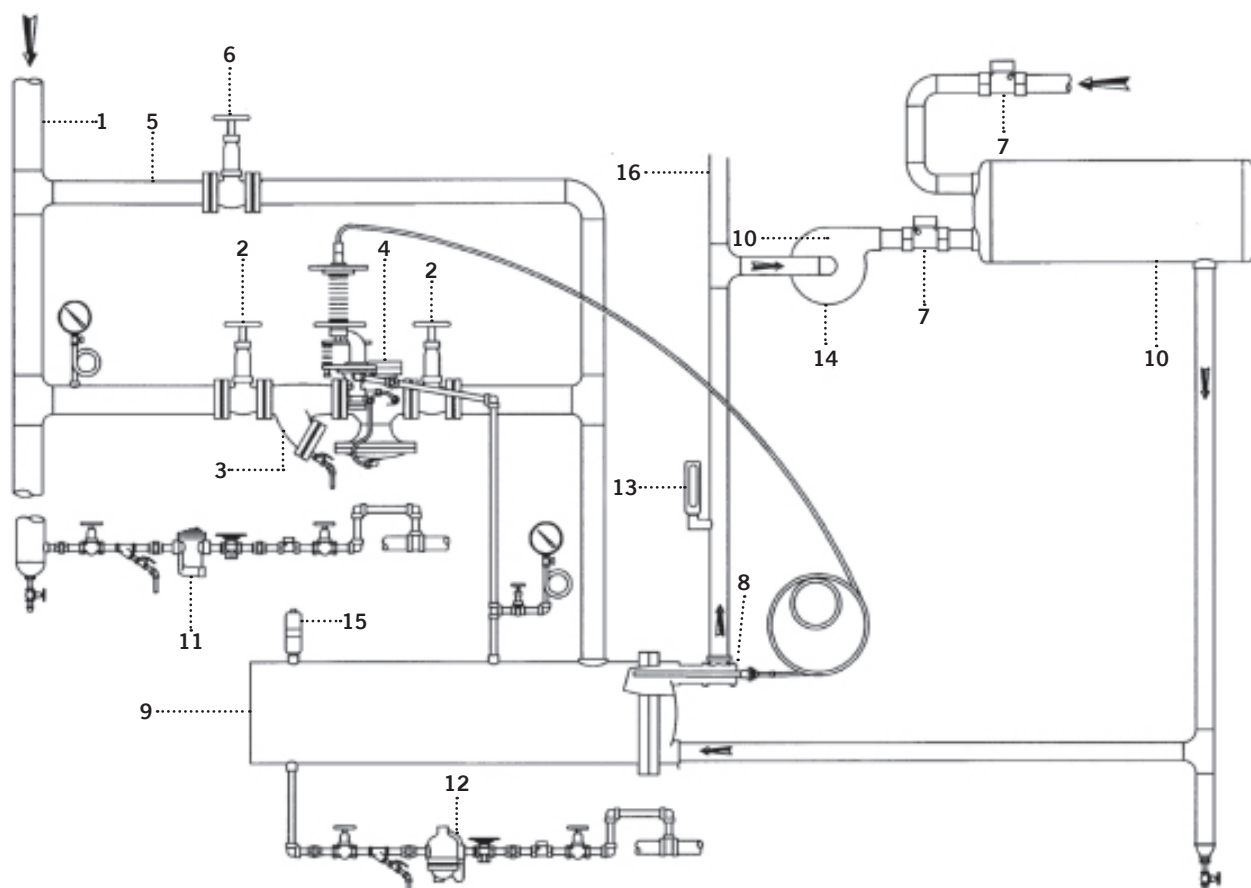


SPENCE TYPICAL INSTALLATION FOR STORAGE HEATER

- | | |
|--------------------------|------------------------|
| 1. Inlet Pipe | 7. Delivery Type |
| 2. Isolation Valve | 8. Thermostat |
| 3. Strainer | 9. Storage Heater |
| 4. Temperature Regulator | 10. Tube Budle |
| 5. Bypass Pipe | 11. High Pressure Trap |
| 6. Bypass Valve | 12. Low Pressure Trap |

Provide as much straight run of pipe on both sides of regulator:

- 10 pipe diameters minimum to the inlet.
- 20 pipe diameters minimum of expanded line size from the outlet.

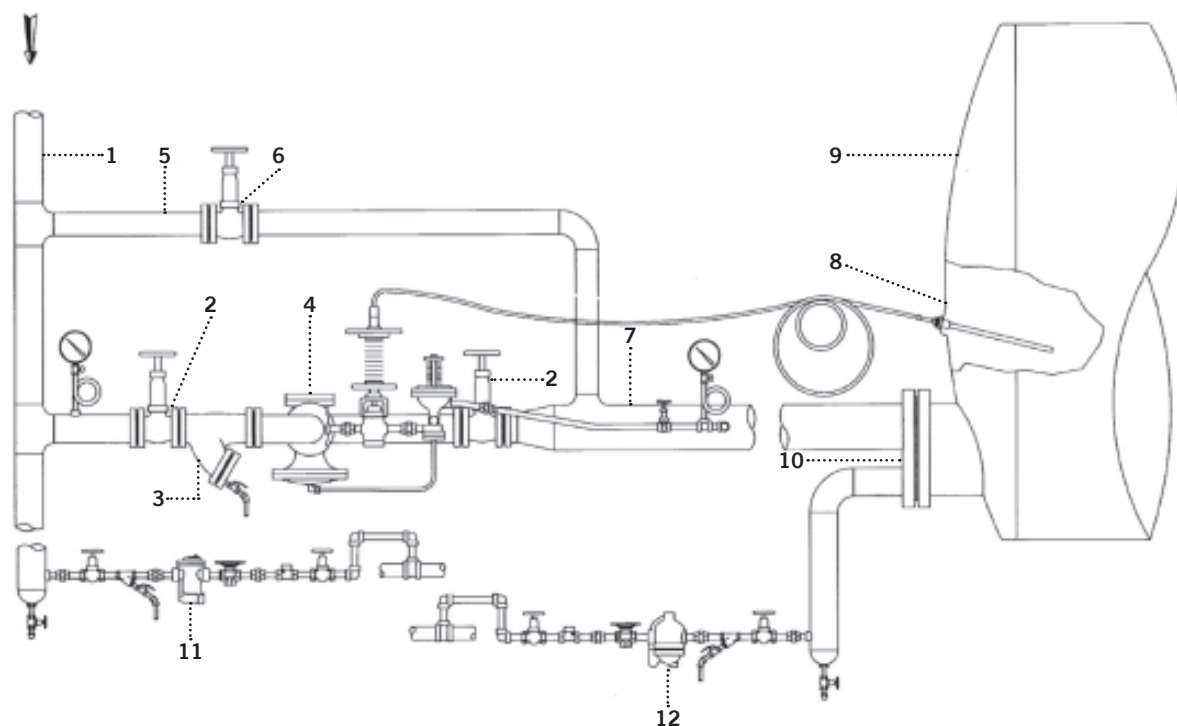

[illegible]

STEAM TABLE*

h = Total heat of steam, Btu per pound
v = Specific volume, cubic feet per pound

Pres- sure psi (gage)	Tempe- rature F° (sat.)		Satur- ated Liquid	Satur- ated Vapor	TOTAL TEMPERATURE, °F													
					220	240	260	280	300	320	340	360	380	400	420	440	460	
0	212	h v	180.1 0.0167	1150.4 26.80	1154.4 27.15	1164.2 28.00	1173.8 28.85	1183.3 29.70	1192.8 30.53	1202.3 31.37	1211.7 32.20	1221.1 33.03	1230.5 33.85	1239.9 34.68	1249.3 35.50	1258.8 36.32	1268.2 37.14	
5	228	h v	196.2 0.0168	1156.3 20.089		1162.3 20.48	1172.2 21.11	1182.0 21.74	1191.6 22.36	1201.2 22.98	1210.8 23.60	1220.3 24.21	1229.7 24.82	1239.2 25.43	1248.7 26.04	1258.2 26.65	1267.6 27.25	
10	240	h v	208.4 0.0169	1160.6 16.303			1170.7 16.819	1180.6 17.330	1190.5 17.836	1200.2 18.337	1209.8 18.834	1219.4 19.329	1229.0 19.821	1238.5 20.31	1248.1 20.80	1257.6 21.29	1267.1 21.77	
15	250	h v	218.8 0.0170	1164.1 13.746			1169.1 13.957	1179.3 14.390	1189.3 14.816	1199.1 15.238	1208.9 15.657	1218.6 16.072	1228.3 16.485	1237.9 16.897	1247.5 17.306	1257.0 17.714	1266.6 18.121	
20	259	h v	227.9 0.0171	1167.1 11.898			1167.5 11.911	1177.9 12.288	1188.1 12.659	1198.1 13.025	1208.0 13.387	1217.8 13.746	1227.5 14.103	1237.2 14.457	1246.8 14.810	1256A 15.162	1266.1 15.512	
25	267	h v	236.0 0.0171	1169.7 10.498				1176.5 10.711	1186.8 11.040	1197.0 11.364	1207.0 11.684	1216.9 12.001	1226.7 12.315	1236.5 12.628	12462 12.938	1255.9 13.247	1265.5 13.555	
30	274	h v	243.4 0.0172	1172.0 9.401				1175.0 9.484	1185.6 9.781	1195.9 10.072	1206.0 10.359	1216.0 10.643	1225.9 10.925	1235.8 11.204	1245.6 11.482	1255.3 11.758	1265.0 120033	
40	287	h v	256.3 0.0173	1175.9 7.787					1183.0 7.947	1193.6 8.192	1204.0 8.432	1214.3 8.668	1224.4 8.902	1234.3 9.134	1244.3 9.364	1254.1 9.592	1263.9 9.819	
50	298	h v	267.5 0.0174	1179.1 6.655					1180.3 6.676	1191.3 6.889	1202.0 7.096	1212.5 7.300	1222.7 7.501	1232.9 7.700	1242.9 7.896	1252.9 8.091	1262.8 8.285	
60	308	h v	277.4 0.0175	1181.9 5.816						1188.9 5.9321	1199.9 6.116	1210.6 6.296	1221.1 6.473	1231.4 6.648	1241.6 6.820	1251.7 6.991	1261.7 7.161	
70	316	h v	286.4 0.0176	1184.2 5.168						1186.4 5.200	1197.7 5.366	1208.7 5.528	1219.4 5.687	1229.9 5.843	1240.2 5.997	1250.4 6.150	1260.6 6.301	
80	324	h v	294.6 0.0177	1186.2 4.652							1195.5 4.773	1206.7 4.921	1217.7 5.065	1228.3 5.207	1238.8 5.347	1249.2 5.485	1259.4 5.621	
90	331	h v	302.1 0.0178	1188.1 4.232							1193.2 4.292	1204.7 4.429	1215.9 4.562	1226.7 4.693	1237.4 4.821	1247.9 4.947	1258.2 5.071	
100	338	h v	309.1 0.0178	1189.7 3.882							1190.8 3.895	1202.7 4.022	1214.1 4.146	1225.2 4.267	1236.0 4.385	1246.6 4.502	1257.1 4.617	
125	353	h v	324.8 0.0180	1193.0 3.220								1197.3 3.258	1209.4 3.365	1211.1 3.468	1232.3 3.569	1243.3 3.667	1254.1 3.764	
150	366	h v	338.5 0.0182	1195.6 2.752									1204.5 2.818	1216.7 2.910	1228.4 2.998	1239.8 3.085	1251.0 3.169	
175	378	h v	350.8 0.0183	1197.6 2.404									1199.3 2.414	1212.2 2.498	1224.5 2.577	1236.3 2.655	1247.8 2.730	
200	388	h v	361.9 0.0185	1199.3 2.134										1207.4 2.180	1220.3 2.253	1232.6 2.324	1244.5 2.393	
225	397	h v	372.1 0.0186	1200.6 1.9183										1202.5 1.9276	1216.0 1.9964	1228.8 2.062	1241.1 2.126	
250	406	h v	381.6 0.0187	1201.7 1.7422											1211.5 1.7870	1224.9 1.8488	1237.6 1.9081	
275	414	h v	390.5 0.0188	1202.6 1.5954												1206.8 1.6130	1220.8 1.6717	1234.0 1.7277
300	422	h v	398.8 0.0190	1203.2 1.4711													1216.5 1.5222	1230.3 1.5755
350	436	h v	414.1 0.0192	1204.1 1.2720													1207.5 1.2831	1222.4 1.3326
400	448	h v	428.1 0.0194	1204.6 1.1194														1214.0 1.1468
450	460	h v	440.9 0.0196	1204.6 0.9985														
500	470	h v	452.9 0.0198	1204.2 0.9004														
550	480	h v	464.1 0.0200	1203.7 0.8191														
600	489	h v	474.7 0.0202	1203.0 0.7503														

*Adapted with permission from "Thermodynamic Properties of Steam", Keenan and Keyes, published by John Wiley & Sons, Inc.

STEAM TABLE*

h = Total heat of steam, Btu per pound
v = Specific volume, cubic feet per pound

TOTAL TEMPERATURE, °F															Tempe- rature F° (sat.)	Pres- sure psi (gage)
480	500	520	540	560	580	600	620	640	660	680	700	720	740	750		
1277.6 37.96	1287.1 38.78	1296.6 39.60	1306.2 40.41	1315.7 41.23	1325.3 42.04	1334.8 42.86	1344.5 43.68	1354.2 44.49	1363.8 45.31	1373.5 46.12	1383.2 46.94	1393.0 47.75	1402.8 48.56	1407.7 48.97	h v	212 0
1277.1 27.86	1286.6 28.46	1296.2 29.06	1305.7 29.67	1315.3 30.27	1324.8 30.87	1334.4 31.47	1344.1 32.07	1353.8 32.67	1363.5 33.27	1373.2 33.87	1382.9 34.47	1392.7 35.07	1402.6 35.67	1407.5 35.96	h v	228 5
1276.6 22.26	1286.2 22.74	1295.8 23.22	1305.3 23.71	1314.9 24.19	1324.5 24.68	1334.1 25.16	1343.8 25.64	1353.5 26.12	1363.2 26.60	1372.9 27.08	1382.6 27.56	1392.5 28.04	1402.3 28.52	1407.2 28.76	h v	240 10
1276.2 18.528	1285.7 18.933	1295.3 19.337	1304.9 19.741	1314.5 20.144	1324.2 20.547	1333.8 20.95	1343.5 21.35	1353.2 21.75	1362.9 22.15	1372.6 22.56	1382.4 22.96	1392.3 23.36	1402.1 23.76	1407.0 23.96	h v	250 15
1275.7 15.862	1285.3 16.210	1294.9 16.558	1304.5 16.905	1314.1 17.251	1323.8 17.597	1333.5 17.943	1343.2 18.288	1352.9 18.633	1362.6 18.977	1372.3 19.322	1382.1 19.666	1391.9 20.01	1401.8 20.35	1406.7 20.52	h v	259 20
1275.2 13.862	1284.8 14.168	1294.5 14.473	1304.1 14.778	1313.8 15.082	1323.4 15.385	1333.1 15.688	1342.8 15.990	1352.5 16.293	1362.3 16.595	1372.1 16.896	1381.9 17.198	1391.7 17.499	1401.6 17.8001	1406.5 7.951	h v	267 25
1274.7 12.307	1284.4 12.580	1294.0 12.852	1303.7 13.123	1313.4 13.394	1323.1 13.665	1332.8 13.935	1342.5 14.204	1352.2 14.473	1362.0 14.742	1371.8 15.011	1381.6 15.279	1391.5 15.547	1401.4 15.815	1406.3 15.949	h v	274 30
1273.7 10.044	1283.4 10.269	1293.2 10.493	1302.9 10.717	1312.6 10.940	1322.4 11.162	1332.1 11.384	1341.9 11.605	1351.7 11.826	1361.5 12.047	1371.3 12.268	1381.1 12.488	1391.0 12.708	1400.9 12.927	1405.8 13.037	h v	287 40
1272.7 8.478	1282.5 8.670	1292.3 8.861	1302.1 9.051	1311.9 9.240	1321.7 9.429	1331.5 9.618	1341.3 9.806	1351.1 9.993	1360.9 10.181	1370.8 10.368	1380.6 10.555	1390.5 10.741	1400.4 10.928	1405.4 11.021	h v	298 50
1271.6 7.329	1281.5 7.496	1291.4 7.663	1301.3 7.829	1311.1 7.994	1321.0 8.159	1330.8 8.323	1340.6 8.486	1350.5 8.649	1360.3 8.812	1370.2 8.975	1380.1 9.138	1390.0 9.300	1399.9 9.462	1404.9 9.543	h v	308 60
1270.6 6.450	1280.6 6.599	1290.5 6.747	1300.5 6.894	1310.4 7.041	1320.2 7.187	1330.1 7.332	1340.0 7.477	1349.9 7.622	1359.8 7.766	1369.7 7.910	1379.6 8.054	1389.6 8.198	1399.5 8.341	1404.5 8.413	h v	316 70
1269.5 5.756	1279.6 5.891	1289.6 6.024	1299.6 6.156	1309.6 6.288	1319.5 6.419	1329.4 6.550	1339.4 6.680	1349.3 6.810	1359.3 6.940	1369.2 7.069	1379.1 7.199	1389.1 7.327	1399.0 7.456	1404.0 7.520	h v	324 80
1268.5 5.195	1278.6 5.317	1288.7 5.439	1298.8 5.559	1308.8 5.679	1318.8 5.799	1328.7 5.918	1338.7 6.036	1348.7 6.154	1358.6 6.272	1368.6 6.389	1378.5 6.506	1388.5 6.623	1398.5 6.740	1403.5 6.798	h v	331 90
1267.4 4.730	1277.7 4.843	1287.8 4.955	1297.9 5.066	1308.0 5.176	1318.0 5.285	1328.1 5.394	1338.1 5.503	1348.0 5.611	1358.0 5.719	1368.0 5.827	1378.0 5.934	1388.1 6.041	1398.1 6.148	1403.1 6.201	h v	338 100
1264.7 3.860	1275.2 3.954	1285.5 4.047	1295.8 4.140	1306.0 4.232	1316.2 4.323	1326.4 4.413	1336.5 4.503	1346.6 4.593	1356.6 4.683	1366.7 4.772	1376.8 4.861	1386.9 4.949	1397.0 5.038	1402.0 5.082	h v	353 125
1261.9 3.252	1272.6 3.334	1283.2 3.414	1293.6 3.494	1304.0 3.573	1314.3 3.652	1324.6 3.730	1334.8 3.807	1345.0 3.884	1355.2 3.960	1365.3 4.037	1375.4 4.113	1385.6 4.188	1395.8 4.264	1400.8 4.301	h v	366 150
1259.0 2.804	1270.0 2.877	1280.8 2.948	1291.4 3.019	1302.0 3.089	1312.4 3.157	1322.8 3.226	1333.2 3.294	1343.5 3.361	1353.7 3.429	1363.9 3.495	1374.2 3.562	1384.4 3.628	1394.6 3.694	1399.7 3.727	h v	378 175
1256.0 2.460	1267.3 2.525	1278.3 2.590	1289.2 2.653	1299.9 2.716	1310.5 2.777	1321.0 2.839	1331.4 2.900	1341.8 2.960	1352.2 3.019	1362.5 3.079	1372.8 3.139	1383.1 3.198	1393.3 3.256	1398.5 3.286	h v	388 200
1253.0 2.187	1264.5 2.247	1275.8 2.306	1286.9 2.364	1297.8 2.421	1308.5 2.477	1319.2 2.533	1329.8 2.587	1340.3 2.642	1350.7 2.696	1361.1 2.750	1371.5 2.804	1381.9 2.857	1392.2 2.910	1397.3 2.936	h v	397 225
1249.9 1.9654	1261.7 2.021	1273.2 2.076	1284.5 2.129	1295.6 2.181	1306.5 2.233	1317.3 2.284	1328.0 2.334	1338.7 2.384	1349.2 2.434	1359.7 2.483	1370.2 2.532	1380.6 2.580	1391.0 2.629	1396.2 2.653	h v	406 250
1246.6 1.7816	1258.8 1.8338	1270.6 1.8846	1282.1 1.9342	1293.4 1.9829	1304.5 2.031	1315.5 2.078	1326.3 2.125	1337.0 2.171	1347.7 2.217	1358.3 2.262	1368.8 2.307	1379.3 2.352	1389.8 2.396	1395.0 2.418	h v	414 275
1243.3 1.6266	1255.8 1.6759	1267.9 1.7237	1279.7 1.7703	1291.2 1.8159	1302.5 1.8607	1313.6 1.9048	1324.5 1.9483	1335.4 1.9912	1346.1 2.034	1356.8 2.076	1367.4 2.118	1378.0 2.159	1388.6 2.200	1393.8 2.220	h v	422 300
1236.4 1.3795	1249.6 1.4243	1262.4 1.4675	1274.7 1.5094	1286.6 1.5501	1298.2 1.5900	1309.7 1.6291	1320.9 1.6676	1332.0 1.7056	1343.0 1.7430	1353.9 1.7801	1364.7 1.8168	1375.4 1.8531	1386.1 1.8892	1391.4 1.9071	h v	436 350
1229.0 1.1908	1243.2 1.2325	1256.6 1.2724	1269.4 1.3108	1281.8 1.3480	1293.9 1.3842	1305.7 1.4196	1317.2 1.4544	1328.6 1.4885	1339.8 1.5222	1350.9 1.5554	1361.9 1.5883	1372.8 1.6207	1383.6 1.6529	1389.0 1.6689	h v	448 400
1221.2 1.0416	1236.3 1.0811	1250.5 1.1186	1264.0 1.1544	1276.9 1.1889	1289.4 1.2224	1301.6 1.2550	1313.5 1.2868	1325.1 1.3180	1336.5 1.3488	1347.8 1.3789	1359.0 1.4088	1370.1 1.4382	1381.1 1.4675	1386.5 1.4819	h v	460 450
1212.8 0.9204	1229.0 0.9584	1244.0 0.9941	1258.3 1.0280	1271.8 1.0604	1284.8 1.0917	1297.3 1.1221	1309.6 1.1516	1321.5 1.1805	1333.2 1.2088	1344.7 1.2367	1356.1 1.2641	1367.3 1.2913	1378.4 1.3180	1384.0 1.3313	h v	470 500
	1221.4 0.8565	1237.4 0.8909	1252.4 0.9234	1266.5 0.9542	1280.0 0.9838	1293.0 1.0124	1305.6 1.0401	1317.8 1.0671	1329.8 1.0935	1341.6 1.1195	1353.2 1.1449	1364.6 1.1700	1375.8 1.1947	1381.4 1.2070	h v	480 550
	1213.2 0.7703	1230.3 0.8040	1246.1 0.8353	1261.0 0.8649	1275.1 0.8931	1288.5 0.9203	1301.5 0.9465	1314.1 0.9720	1326.3 0.9968	1338.3 1.0211	1350.2 1.0450	1361.8 1.0684	1373.2 1.0916	1378.9 1.1030	h v	489 600

*Adapted with permission from "Thermodynamic Properties of Steam", Keenan and Keyes, published by John Wiley & Sons, Inc.

PRODUCT INDEX

A AIR ADJUSTED PILOT.....	54	INSULCAP JACKET.....	48
AUXILIARY FITTINGS.....	50	TYPE J CONTROL VALVE	150
C34 MAIN VALVE.....	42	SERIES K CONTROL VALVE	142
D & D2 DIFFERENTIAL PRESSURE VALVE.....	103	M SOLENOID PILOT	70
D PRESSURE REDUCING PILOT	52	MAIN VALVE OPTIONS.....	46
D34 WATER PRESSURE REDUCING VALVE	105	MOORE POSITIONER	167
D36 WATER PRESSURE REDUCING VALVE	107	MUFFLING ORIFICE PLATES (MOPS)	182
D50 PRESSURE REDUCING VALVE.....	99	N DIFFERENTIAL PRESSURE PILOT	56
DESUPERHEATERS.....	176	N6 DIFFERENTIAL PRESSURE VALVE	101
E MAIN VALVE	32	NOISE SUPPRESSOR	180
E2 MAIN VALVE	34	P PUMP GOVERNOR PILOT	58
E5 MAIN VALVE	36	P125 TRIP STOP PILOT.....	66
E6 MAIN VALVE	38	PMV POSITIONER	166
E8 MAIN VALVE	40	Q BACK PRESSURE PILOT	62
EA SERIES PRESSURE REGULATOR.....	25	RTD RESISTANCE PROBE THERMOMETER	164
ED & ED2 INTEGRAL MOUNT PRESSURE REGULATOR.....	24	SERIES 2000 TEMPERATURE REGULATOR.....	92
ED SERIES PRESSURE REGULATOR.....	22	SP/P PRESSURE SAFETY PILOT	68
ED2 SERIES PRESSURE REGULATOR.....	23	SP/T TEMPERATURE SAFETY PILOT	84
ED208D PRESSURE REGULATOR.....	30	T124/134 TEMPERATURE/ PRESSURE PILOT	78
ED210 REGULATOR.....	29	T14 VAPOR TENSION TEMPERATURE PILOT	80
ELECTRO-PNEUMATIC (IP) TRANSDUCER	163	T52 TEMPERATURE PILOT	82
ET124/ET134 & E2T134 TEMPERATURE & PRESSURE REGULATOR..	28	T61, T62, T63, T64 PNEUMATIC TEMPERATURE CONTROLLER.....	85
ET14 TEMPERATURE REGULATOR	26	TYPES A & B PANELS.....	49
ET14D PRESSURE LIMITING TEMPERATURE REGULATOR.....	27		
F BACK PRESSURE PILOT.....	64		
F46 VACUUM PUMP GOVERNOR PILOT	60		

[illegible]

This image shows a full page of white paper with horizontal dotted lines, typical of primary school writing paper. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

This image shows a full page of primary-ruled paper. It consists of numerous horizontal dotted lines spaced evenly apart, providing a guide for handwriting practice. The lines are light gray or black dots on a white background, typical of standard primary writing paper. There are no margins, text, or other markings on the page.



All the information in this Spence Designer's Guide
can be found on SpenceEngineering.com.

Emerson Automation Solutions

Americas

McKinney, Texas 75070 USA
T +1 972 548 3574

Walden, NY 12586 USA
T +1 845 778 5566

Europe

T +39 051 419 0611

Asia Pacific

T +65 6777 8211

Middle East / Africa

T +971 4811 8100

 webadmin.regulators@emerson.com
 SpenceEngineering.com

