

Strahman's Award-Winning

KWIK CLEAN 3[®]

Pre-Rinse Spray Nozzle

A True **Revolution** in Ultra-Low-Flow, Ultra-High-Efficiency Pre-Rinse Spray Nozzles for Commercial Kitchens!

The world's best cleaning time, lowest water use, lowest sewage use, lowest energy consumption, best warranty, best user satisfaction and best lifetime cost!

ALL STAINLESS STEEL OPERATING PARTS (No chrome-plated brass or plastic)



**5-year
warranty**

versus the industry
standard of 1 year!




**EPA Act 2005
Compliant**

KWIK CLEAN 3®


Since 1921, Strahman has been the food industry standard for the highest-quality, highest-efficiency, longest-lasting spray nozzles and wash down equipment.

Key Benefits of Kwik Clean 3®:


- ◆ Lowest lifetime cost
- ◆ Lowest per nozzle water use
- ◆ Highest user-satisfaction
- ◆ World record cleaning time
- ◆ Best environmental friendliness of any pre-rinse nozzle in the world
- ◆ All stainless steel construction
- ◆ 3 Unique spray patterns to handle any job

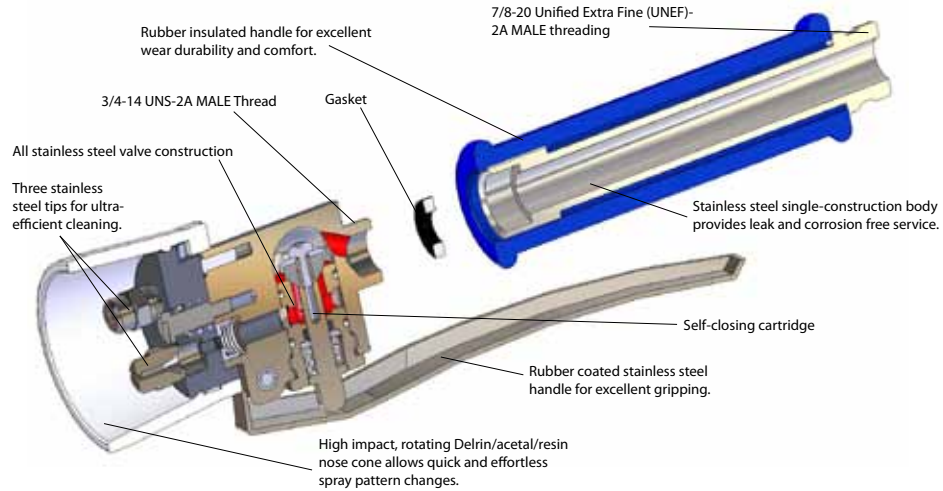


Flow Rate vs. User Satisfaction

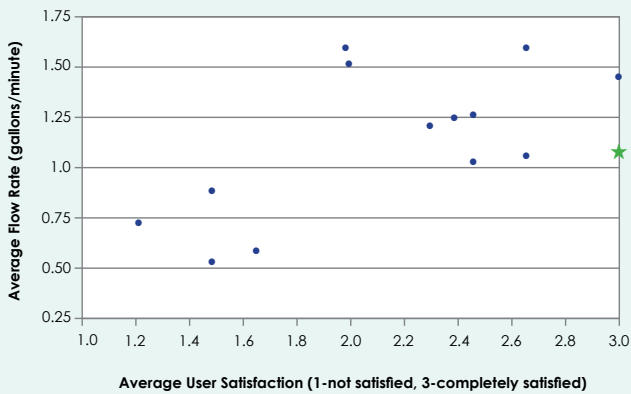

FSTC-Tested Flow Rate vs. Cleanability

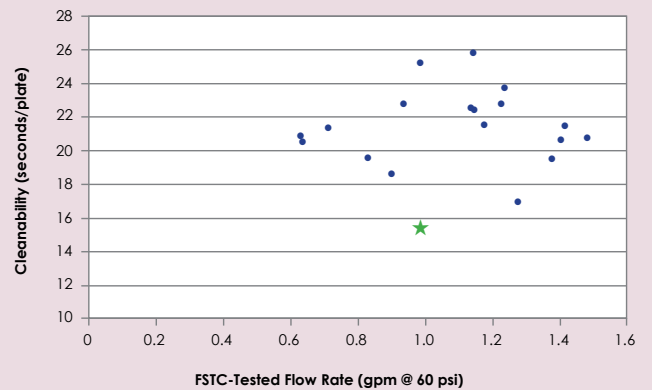


Spray Pattern Choices




15° Fan Spray Tip

Flow Rate: 0.91 gpm @ 60 psi
Description: for light rinse cleaning applications.



Solid Stream Tip

Flow Rate: 0.99 gpm @ 60 psi
Description: High-impact jet pattern for tough cleaning applications.







5° Fan Spray Tip

Flow Rate: 0.92 gpm @ 60 psi
Description: for normal rinse cleaning applications.

Maximum Operating Temperature: 160°F. Other tips available, down to 0.3 gpm.

Kwik Clean 3® Pre-Rinse Spray Nozzle Performance Comparisons

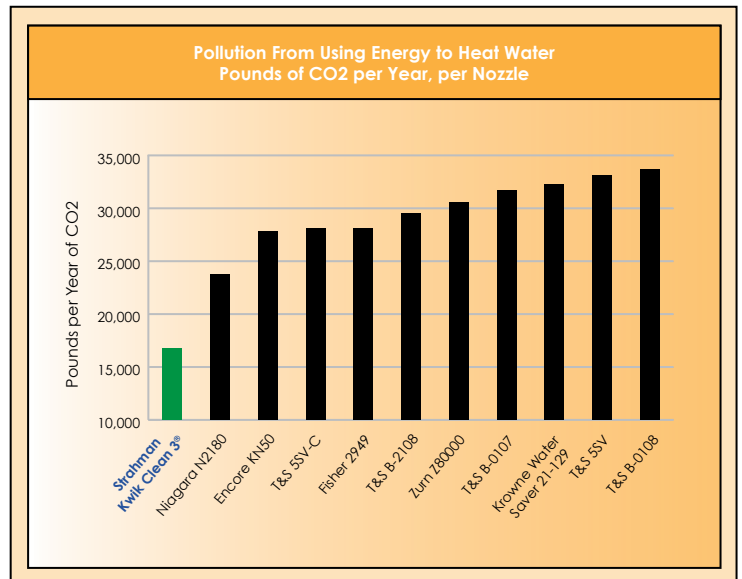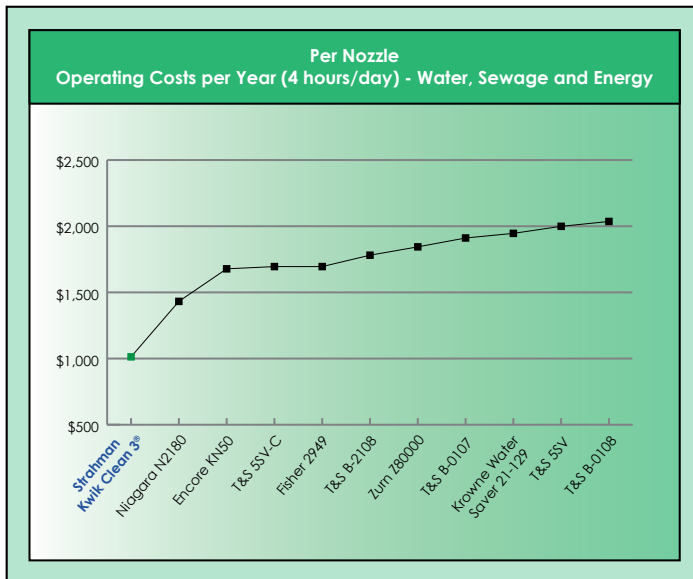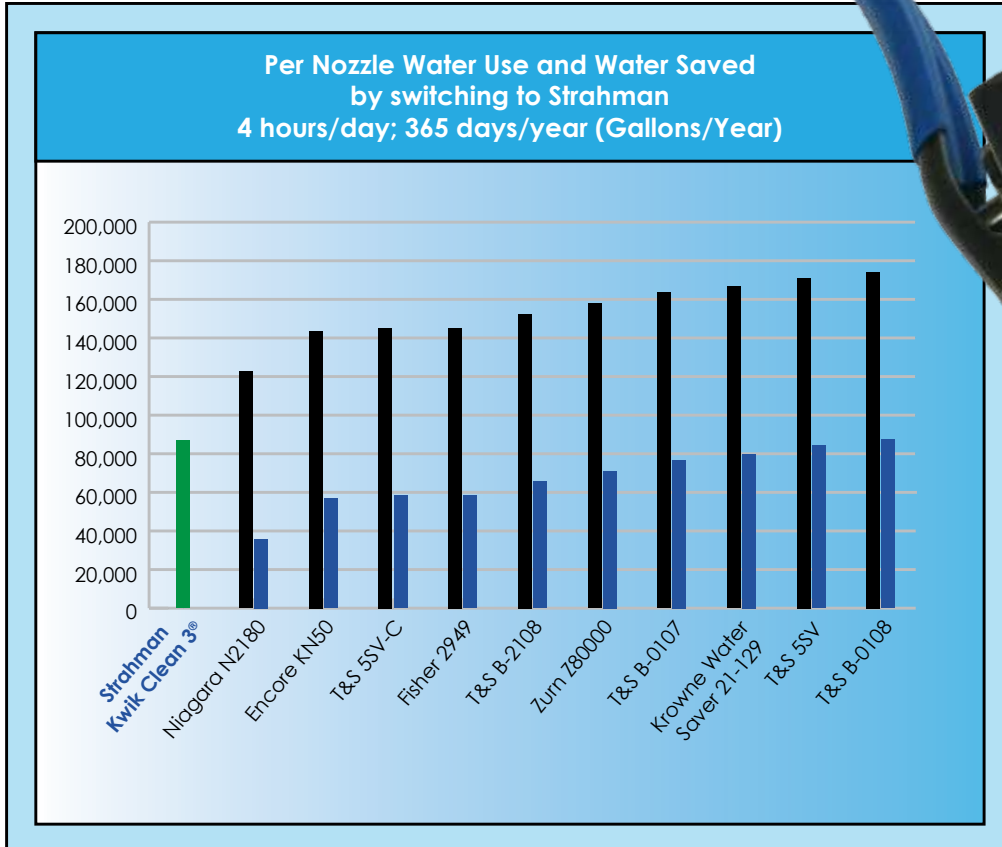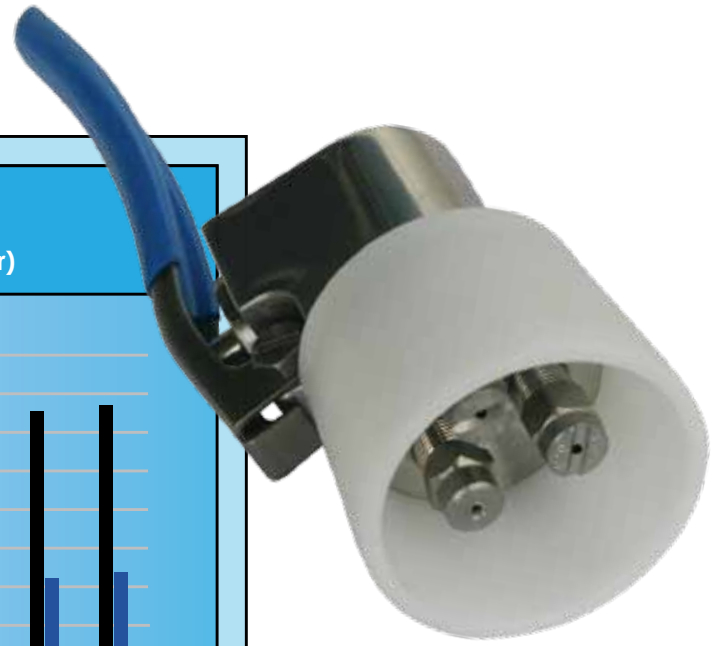

One Kwik Clean 3® saves up to 15,000 pounds/year of CO₂ emissions!

The Strahman Family of Pre-Rinse Products Includes:

pre-rinse spray nozzles, handles, hoses, hose reels and Pivot Pro swivel connectors. Designed for use in restaurants, hotels, supermarkets, and all commercial kitchens, food serving and food preparation applications.



Last Updated: July, 2012



World Headquarters

2801 Baglyos Circle ♦ Bethlehem, PA 18020

Phone: (484) 893-5080 ♦ Fax: (484) 893-5099 ♦ Toll Free: (877) STRAHMAN

www.strahmanvalves.com ♦ strahman@strahman.com

France

Savoie Hexapole, F-73420 Mery, France

Tel: 33 (0) 4 79 35 78 00

Fax: 33 (0) 4 79 35 78 20

Germany

Kirchstrasse 16, D-77855, Achern, Germany

Tel: 49 (0) 7841-6846530

Fax: 49 (0) 7841-6846531



ISO 9001
GM-SAI Global