

# M-70 Series Automatic Water Saver Spray Nozzle

Many of our customers have said Strahman spray nozzles are the best on the market. That is because at Strahman, we combine modern and innovative engineering with premium quality parts to build hoses and nozzles strong enough to withstand even the most rugged applications.

*Also available: M-70 Low Flow Series*

## Specifications

- ♦ **Maximum working pressure:** ..... 150 psi (10 BAR)
- ♦ **Maximum recommended operating temperature:** ..... 200°F/93°C
- ♦ **Flow rates:** ..... 5-7 gpm (50-80 psi)  
10 gpm (150 psi)
- ♦ **Low Flow rates:** ..... 2¼ gpm (20 psi)  
4½ gpm (70 psi)
- ♦ Standard: Bronze construction  
Available: S-70 series, all stainless steel
- ♦ Available: black, white and red
- ♦ Long handle design grip for whole hand placement
- ♦ Replaceable (heavy duty) renewable rubber cover
- ♦ Stainless steel seat design prevents nozzle seat leakage
- ♦ Instant water shut-off when trigger is released
- ♦ Available: ½", ⅝", ¾" ID hose barb, or  
¾" GHT swivel adapter with locking ring

**NOTE:** Not suitable for steam service; 1-year limited warranty

*Please see reverse side for parts listing.*



**Shown:** Red M-70 (black cover),  
M-75 (white cover), M-77 (red cover)



**USA Headquarters**

2801 Baglyos Circle ♦ Bethlehem, PA 18020

Phone: (484) 893-5080 ♦ Fax: (484) 893-5099 ♦ Toll Free: (877) STRAHMAN

[www.strahmanvalves.com](http://www.strahmanvalves.com)

### France

Savoie Hexapole, F-73420 Mery, France

Tel: 33 (0) 4 79 35 78 00

Fax: 33 (0) 4 79 35 78 20

### Germany

Kirchstrasse 16, D-77855, Achern, Germany

Tel: 49 (0) 7841-6846530


Fax: 49 (0) 7841-6846531



ISO 9001  
QMS-SAI Global

*Last Updated: July, 2012*

# M-70 Series Automatic Water Saver Spray Nozzle

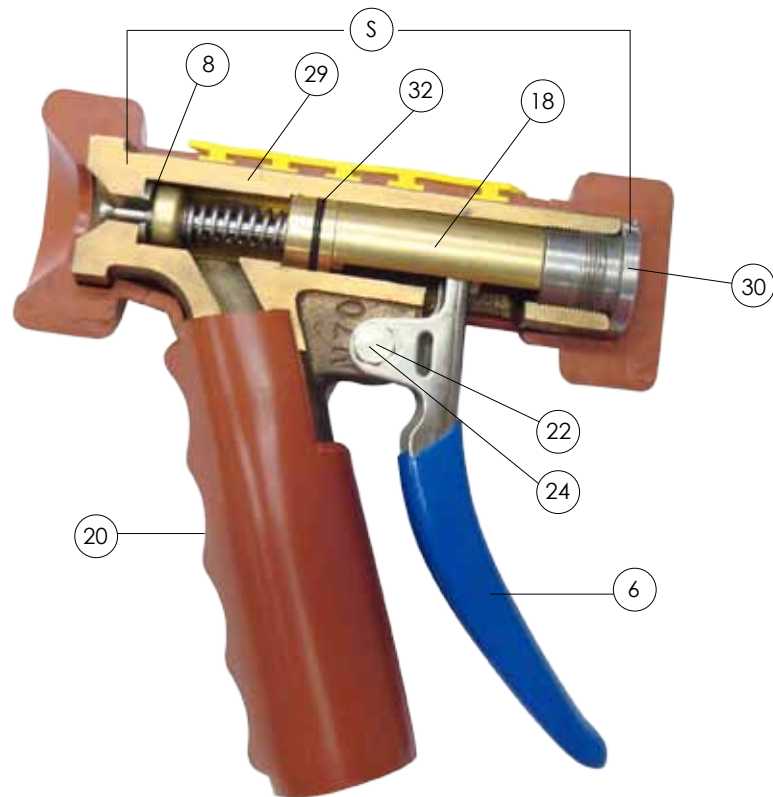

PARTS	
PART NO.	DESCRIPTION
6	LEVER ARM
8	SEAT
18	CAGE
20	RENEWABLE RUBBER COVER (Black, White or Red)
22	LEVER ARM BRUSHING
24	LEVER ARM SCREW
28	LOCK RINGS
29	BODY
30	LOCK SCREW
32	BODY SEALING O-RING
S	S CARTRIDGE