

How to replace cartridge:

1. Remove the **Rubber Cover** (20) by slipping it off the back of the nozzle and pulling it over the front using a round tool; not a sharp tool, which can cut cover.
2. Remove the **Lever Arm Screw & Nut** (24) and the **Lever Arm** (6).
3. Unscrew **Lock Screw** (30) and extract the **Cartridge** from back end of nozzle with **Cage** (18).
4. Be sure when replacing **Cage** (18) to place cut-away part of **Cage** facing downward, so **Lever Arm** (6) can be inserted.
5. To insert new cartridge, reverse order beginning with 4-1 above and then proceed to 6.
6. Be sure **Lever Arm** (6) is placed ahead of **Stem Guide** (31) on cartridge unit.
7. To replace **Rubber Cover** (20) wipe body with detergent, insert nozzle end first then handle into cover. Use a round ended tool approx. 3/8" in diameter to stretch cover over back. Do not use sharp tool. Sharp tools can cut cover.




WDEWSNZASSY062020

WATER-SAVER SPRAY NOZZLE

Assembly Instructions for

M-70, S-70, E-76, S-76, S-80, F-90 & S-90 SERIES



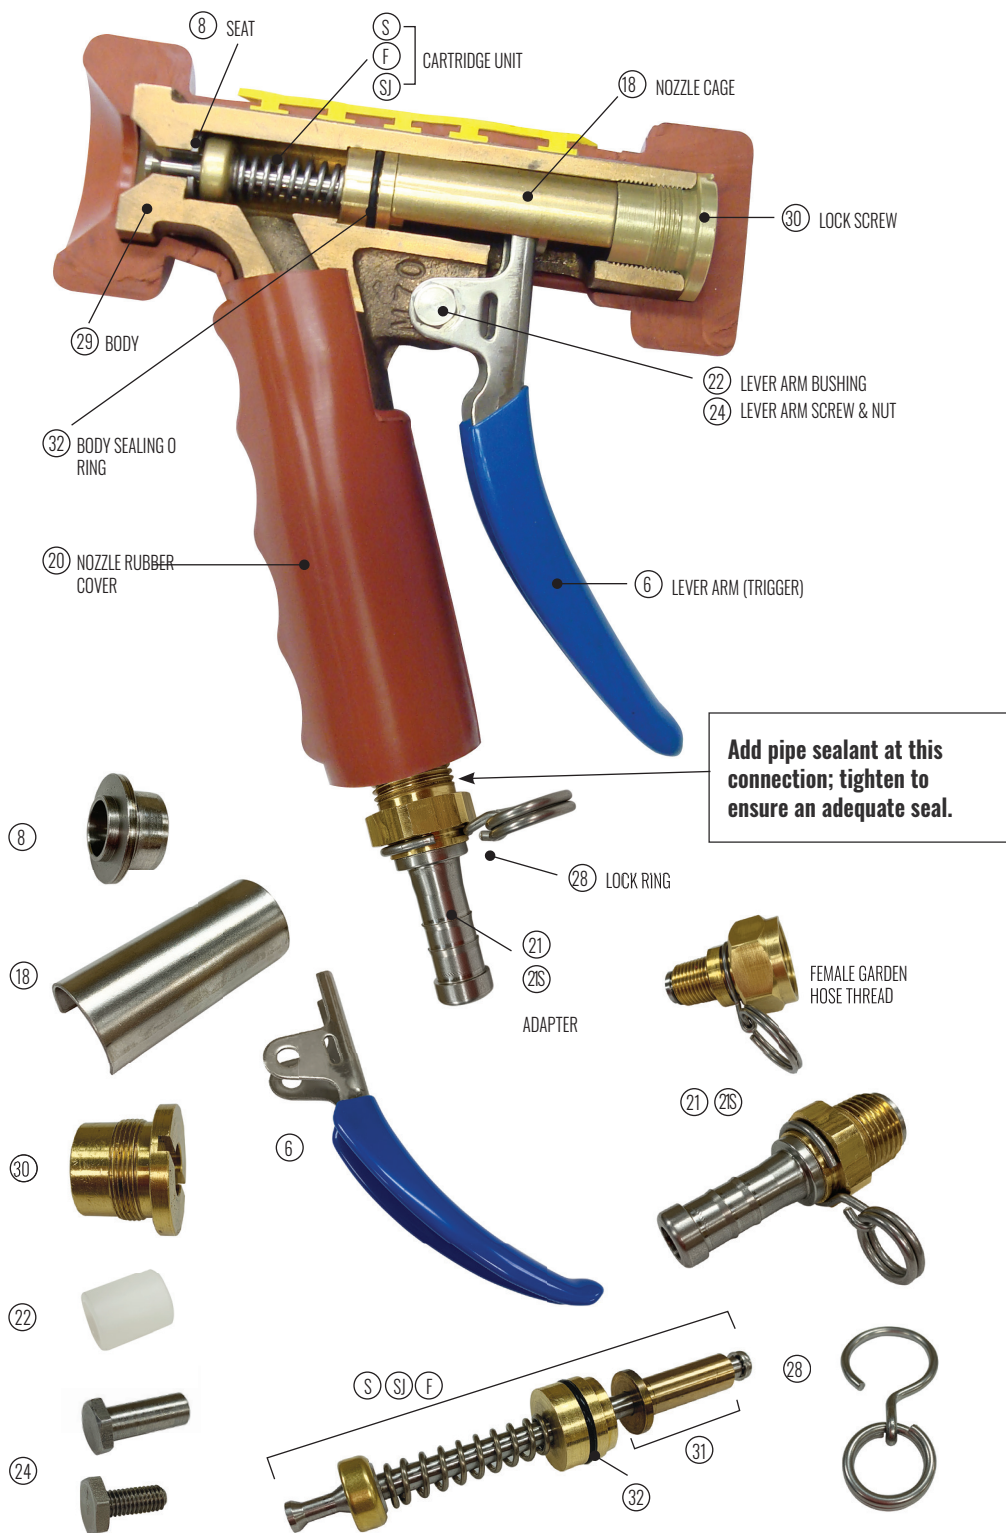

(20B) RUBBER COVER - BLACK



(20R) RUBBER COVER - RED



(20W) RUBBER COVER - WHITE

INSTRUCTION FOR SERVICING SPRAY NOZZLE:

The entire working parts of the Strahman Water-Saver Spray Nozzle are contained in a Single Cartridge Unit.

CAUTION—NOT FOR USE ON STEAM HOSE.

(Instructions on back page.)

PARTS LIST										
ITEM	PART NUMBER	DESCRIPTION	M-70	S-70	E-76	S-76	S-80	S-80SS	F-90	S-90
8	WSSEAT	SEAT, SS 303	✓	✓	✓	✓	✓	✓	✓	✓
18	WSCASS	NOZZLE CAGE, SS 304	✓	✓	✓	✓	✓	✓	✓	✓
30	LSCRBR	LOCK SCREW, BR C3600	✓	-	✓	-	✓	-	✓	-
30	LSCRSS	LOCK SCREW, SS 303	-	✓	-	✓	-	✓		✓
22	LARMBU	LEVER ARM BUSHING NYLON	✓	✓	✓	✓	✓	✓	✓	✓
24	WSLSCR	LEVER ARM SCREW, SS 303	✓	✓	✓	✓	✓	✓	✓	✓
24	WSLNUT	LEVER ARM NUT, SS 303	✓	✓	✓	✓	✓	✓	✓	✓
6	LEVER ARM - BLUE (BL); YELLOW (Y); ORANGE (O)		BL	BL	BL	BL	Y	Y	BL	O
29	BODY, BRASS C83600		✓	-	✓	-	✓	-	✓	-
29	BODY, STAINLESS STEEL 304		-	✓	-	✓	-	✓	-	✓
20	NOZZLE RUBBER COVER - BLACK (B); RED (R); WHITE (W)		✓	✓	✓	-	✓	✓	✓	✓
ADAPTER PARTS										
21S	G075BR	¾" FGHT SWIVEL HOSE	✓	✓	✓	✓	✓	✓	✓	✓
21S	SWADAP0500BR	½" BARB SWIVEL ADAPT.	✓	✓	✓	✓	✓	✓	✓	✓
21S	SWIVADAP0063BR	⅝" BARB SWIVEL ADAPT.	✓	✓	✓	✓	✓	✓	✓	✓
21S	SWIVADAP0075BR	¾" BARB SWIVEL ADAPT.	✓	✓	✓	✓	✓	✓	✓	✓
21	WSADAPTERCOM- PLETE0003	¾" FGHT RIDGID ADAPT.	✓	✓	✓	✓	✓	✓	✓	✓
21	BARB0050BR	½" BARB RIDGID ADAPT.	✓	✓	✓	✓	✓	✓	✓	✓
21	BARB0063BR	⅝" BARB RIDGID ADAPT.	✓	✓	✓	✓	✓	✓	✓	✓
21	BARB0075BR	¾" BARB RIDGID ADAPT.	✓	✓	✓	✓	✓	✓	✓	✓
28	WSLRNG	LOCK RING, SS302	✓	✓	✓	✓	✓	✓	✓	✓
REPLACEABLE CARTRIDGE UNIT										
M70	M70CARTBR	REPLACEABLE CARTRIDGE	✓	✓	✓	-	-	-	-	-
M SJ	WSS76CART0000 WSS80CART0001	REPLACEABLE CARTRIDGE	-	-	-	M	SJ	SJ	-	-
F SF	WSF90CART0000 WSS90CART0000	REPLACEABLE CARTRIDGE	-	-	-	-	-	-	F	SF
31	STEM GUIDE (INSTALLED WITH CARTRIDGE)		✓	✓	✓		✓	✓	✓	✓
32	BODY SEALING O RING (INSTALLED W/CARTR.)		✓	✓	✓		✓	✓	✓	✓